

Joseph Lstiburek, Ph.D., P.Eng, ASHRAE Fellow

Building Science

Roofs

presented by www.buildingscience.com

Arrhenius Equation

For Every 10 Degree K Rise
Rate of Reaction Doubles

$$k = Ae^{-E_a/(RT)}$$



Damage Functions


Water

Heat


Ultra-violet Radiation

Vapor Pressure and Relative Humidity

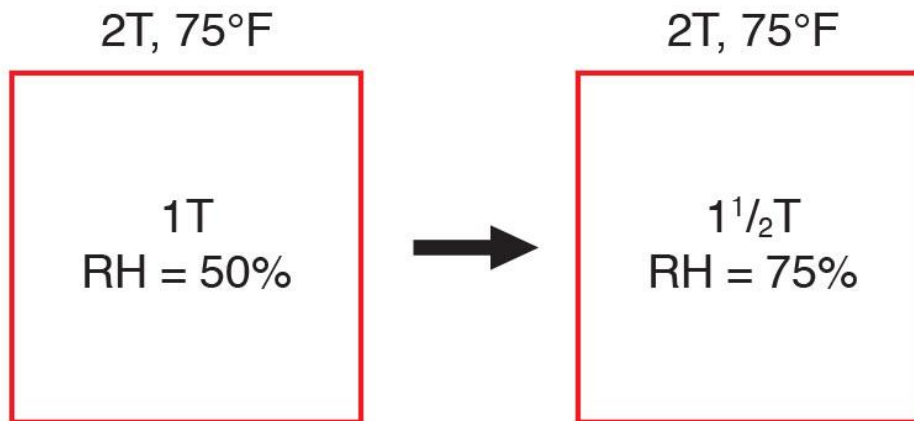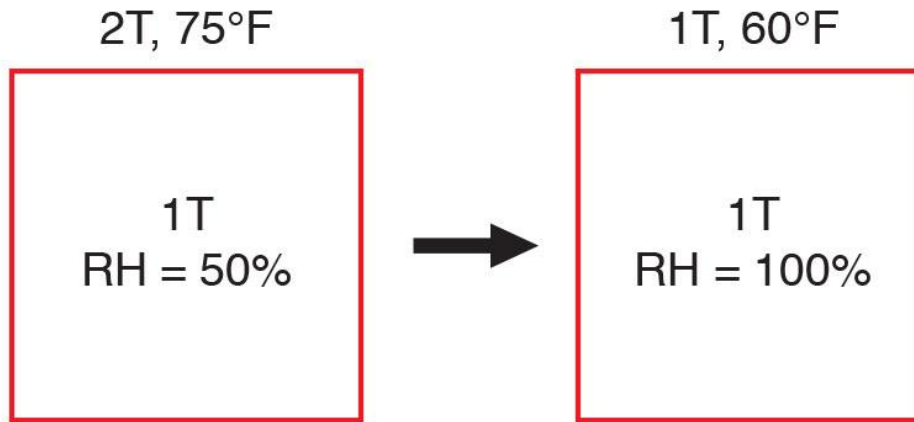


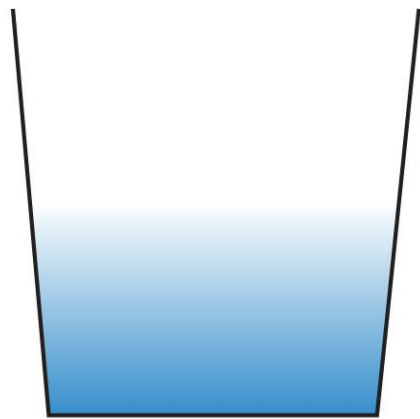

90°F
50% RH



75°F
50% RH




60°F
50% RH




45°F
50% RH



30°F
50% RH

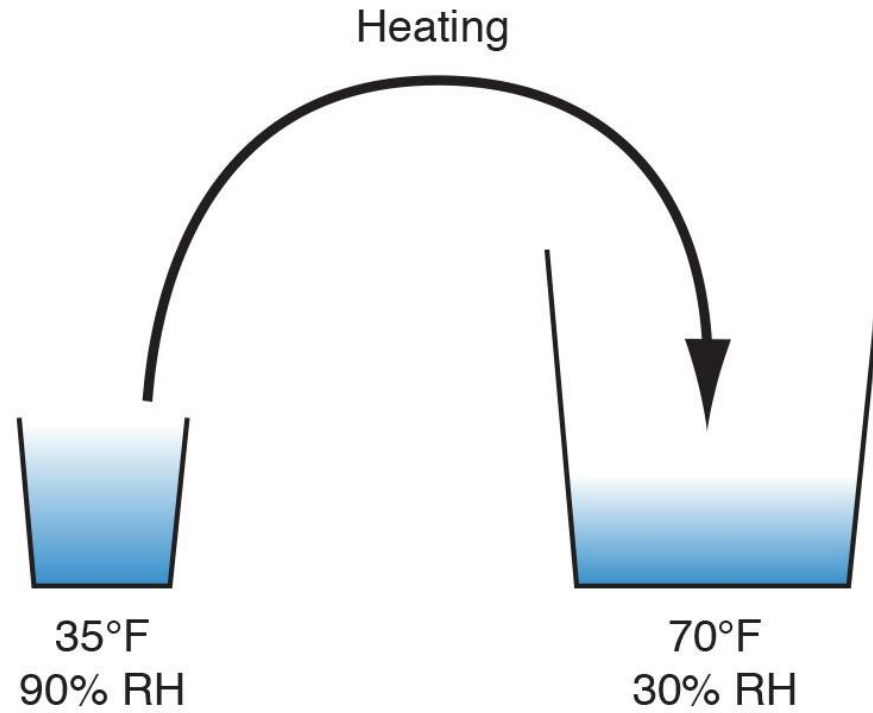

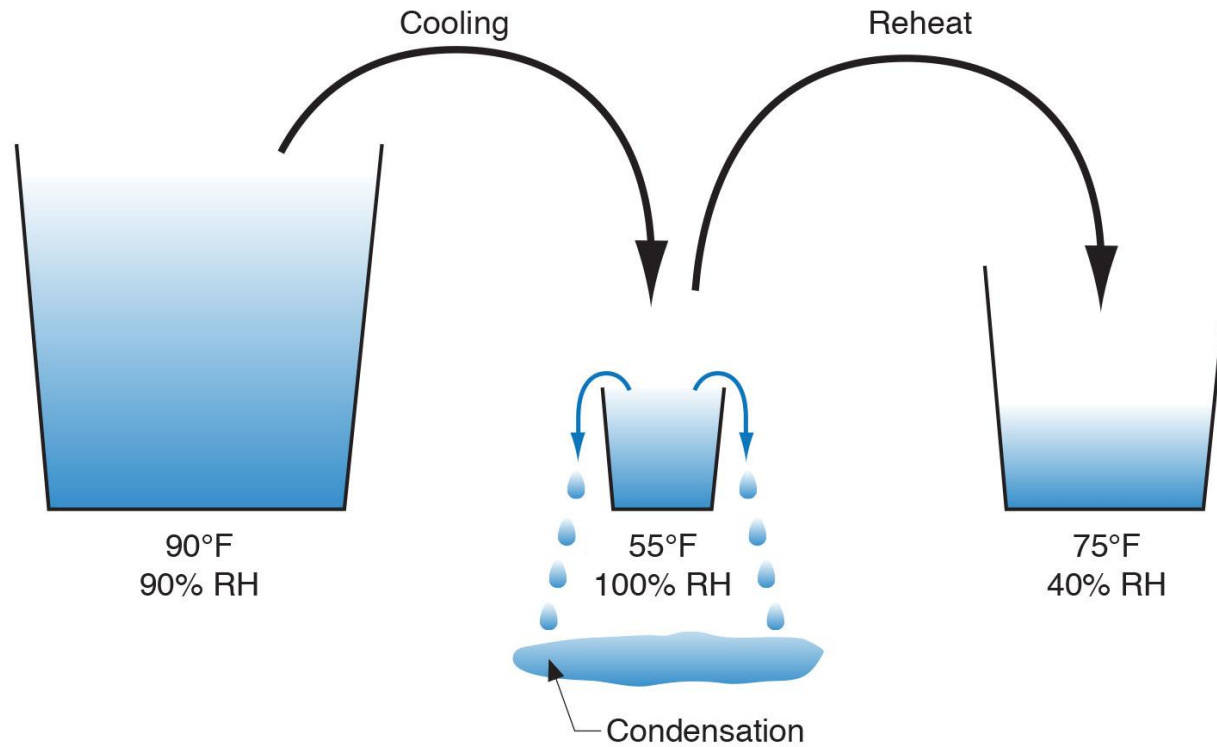




PSYCHROMETRIC CHART

NORMAL TEMPERATURES

SI METRIC UNITS

Barometric Pressure 101.325 kPa


SEA LEVEL

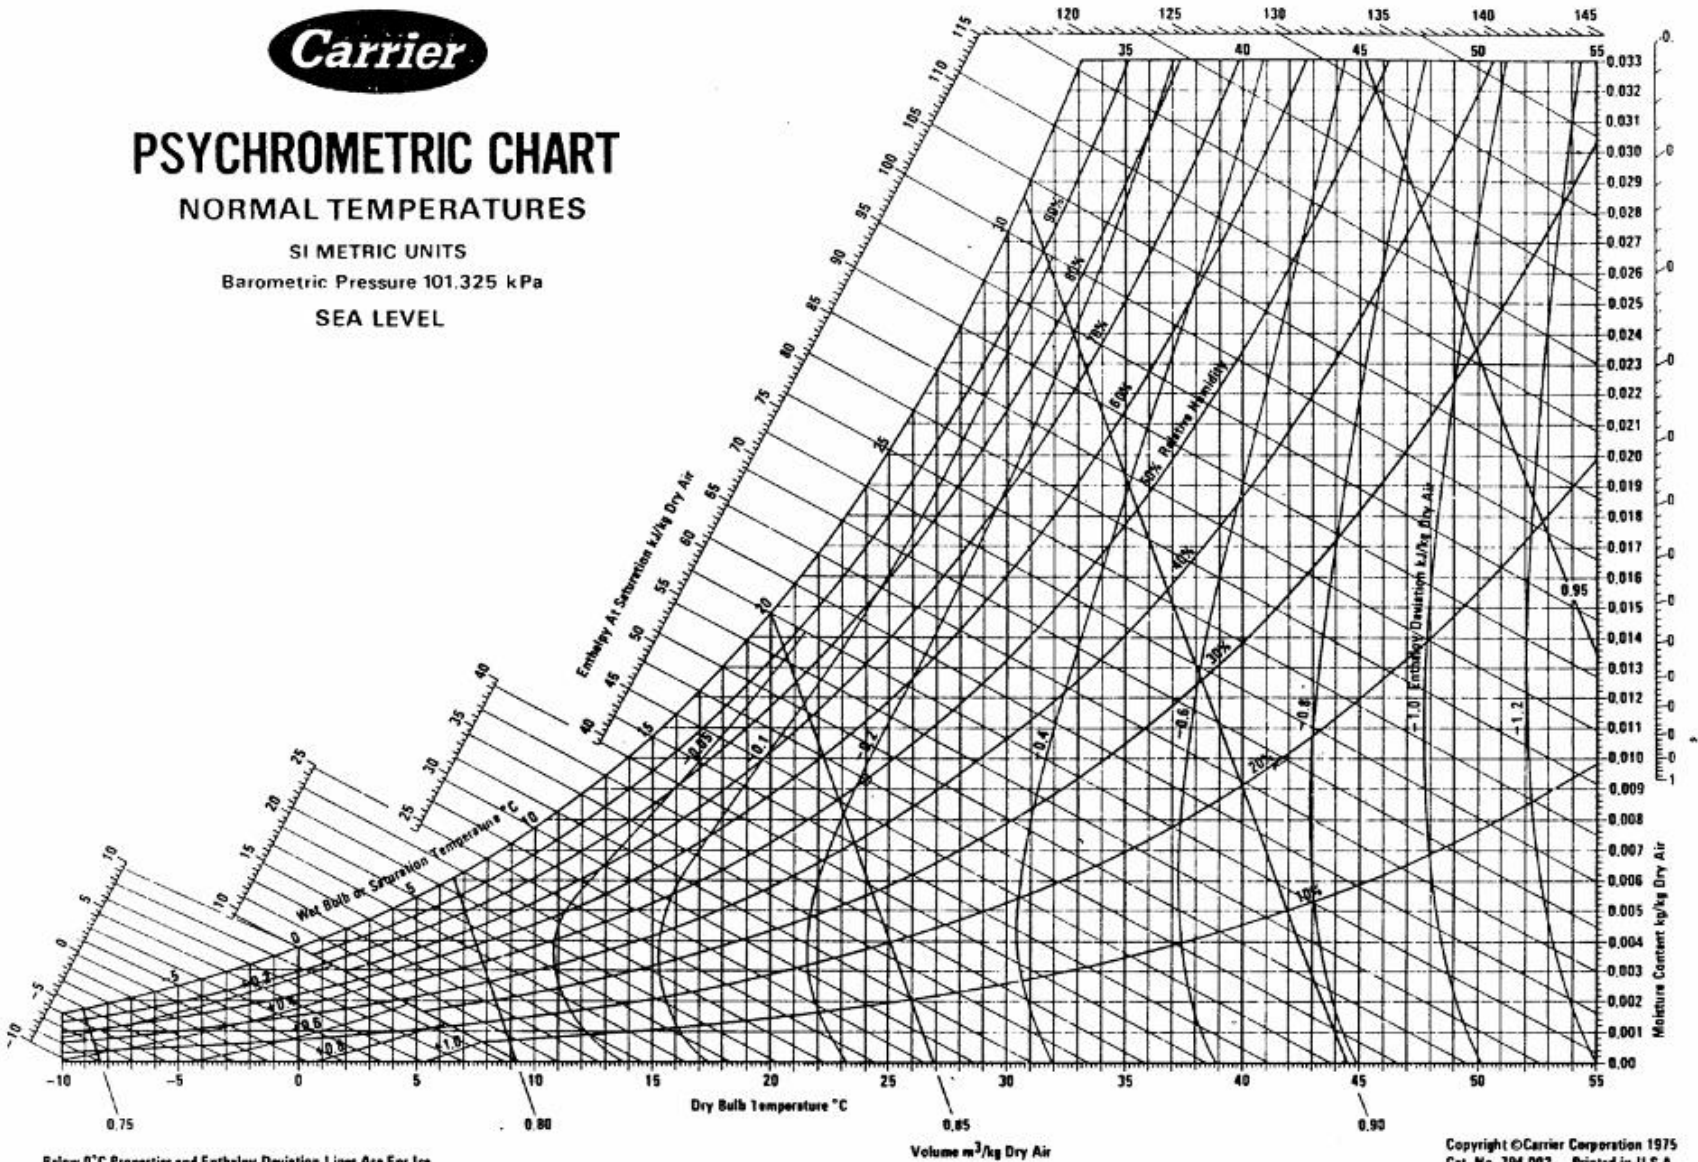

Below 0°C Properties and Enthalpy Deviation Lines Are For Ice

Copyright ©Carrier Corporation 1975
Cat. No. 794-002 Printed in U.S.A.


Sorption Isotherms

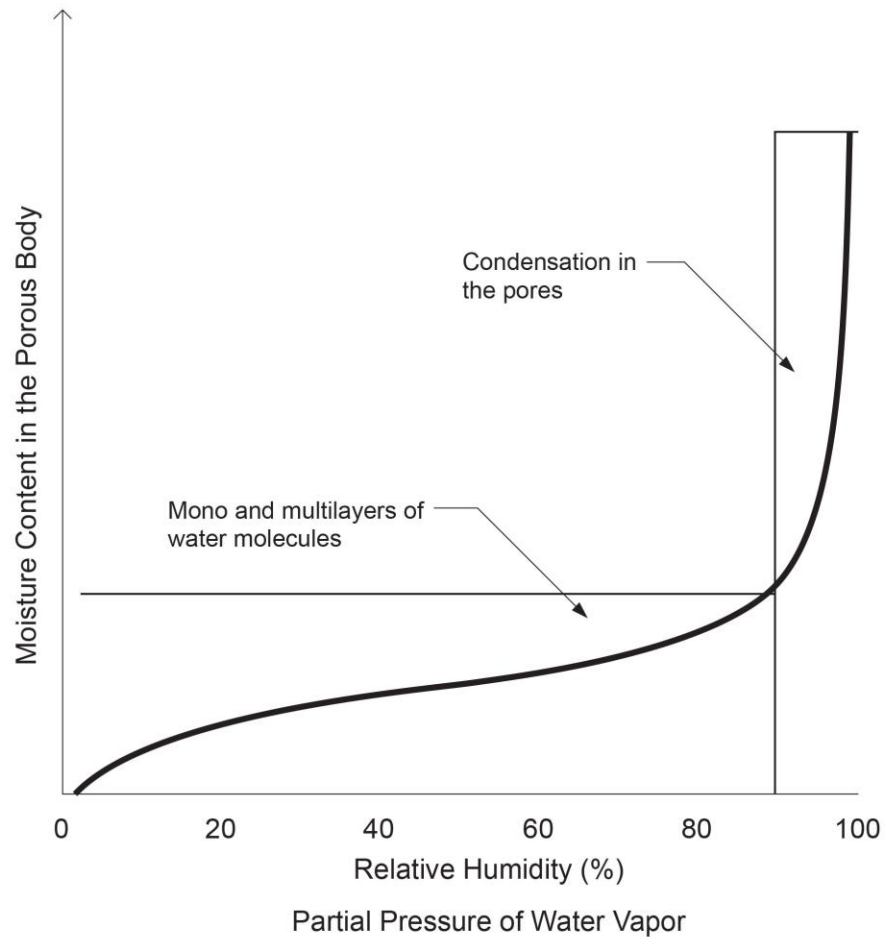


Change in the storage of moisture in a porous building material as the partial pressure of water vapor in the ambient air increases from zero to full saturation value at a given temperature.

Sorption Curve


From M.K. Kumaran, ASTM MNL 18-2nd Edition,
Moisture Control in Buildings, 2009

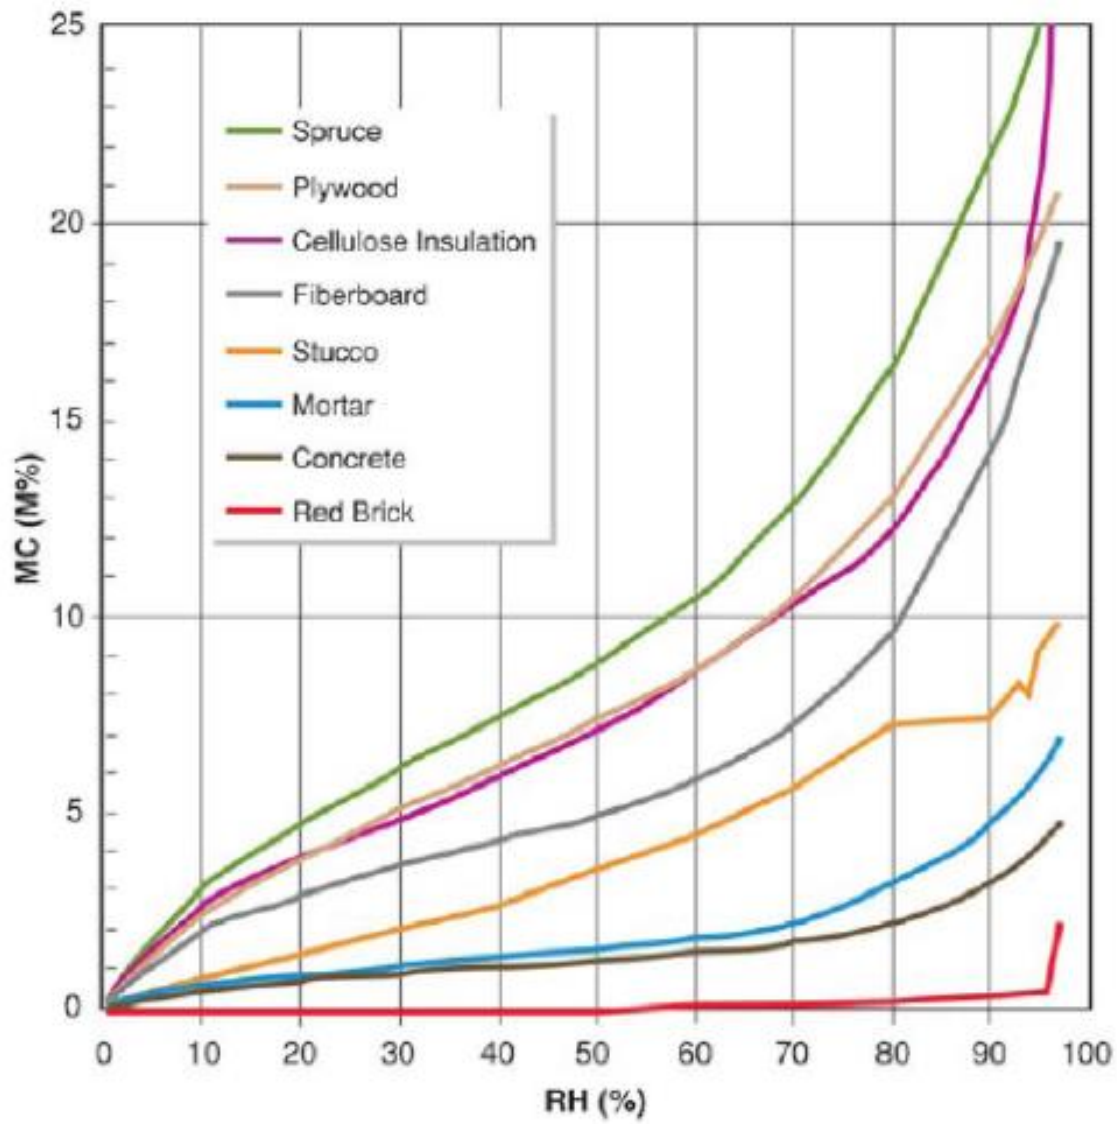

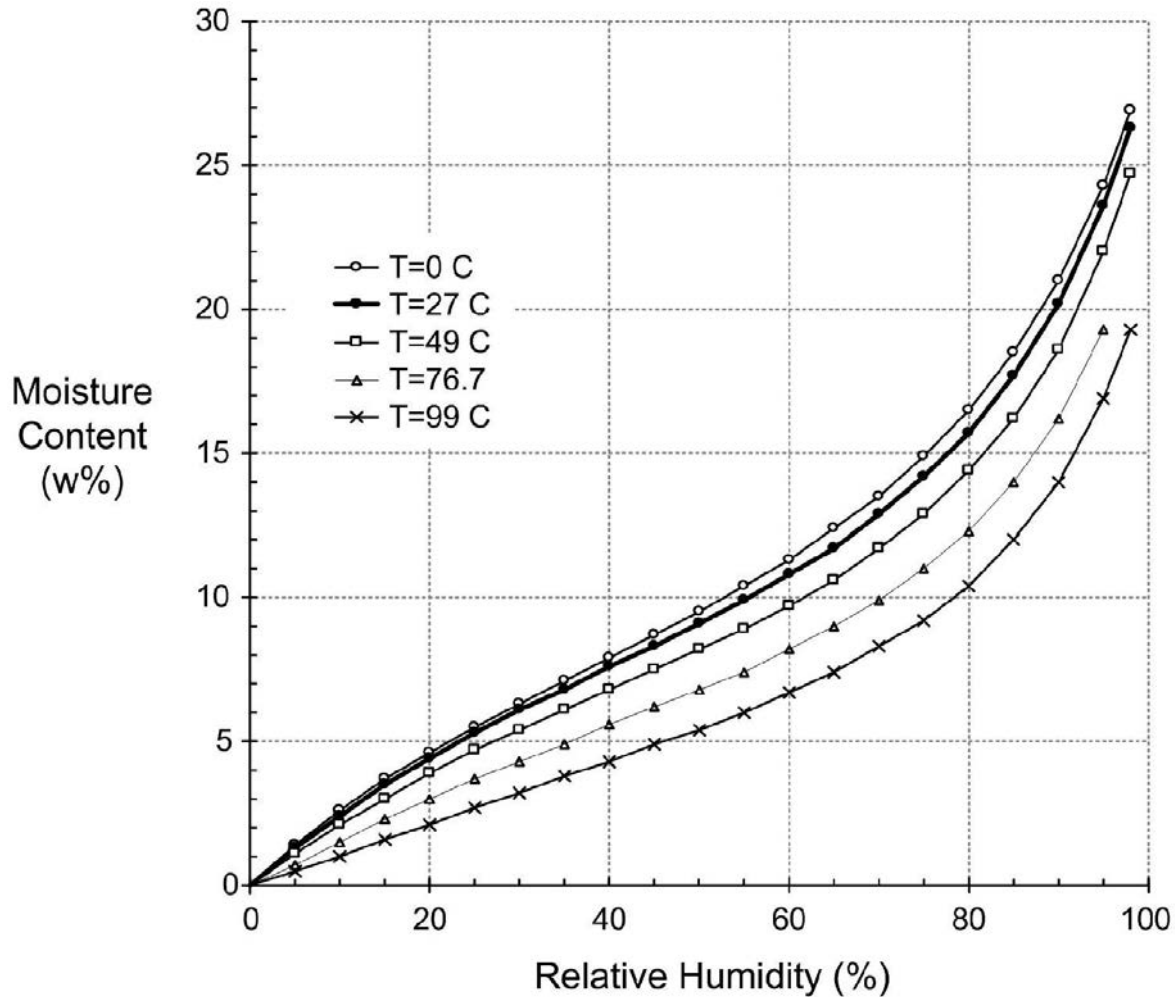

Average sorption isotherm for wood as a function of temperature
 From Straube & Burnett, 2005

Moisture Content vs. Relative Humidity

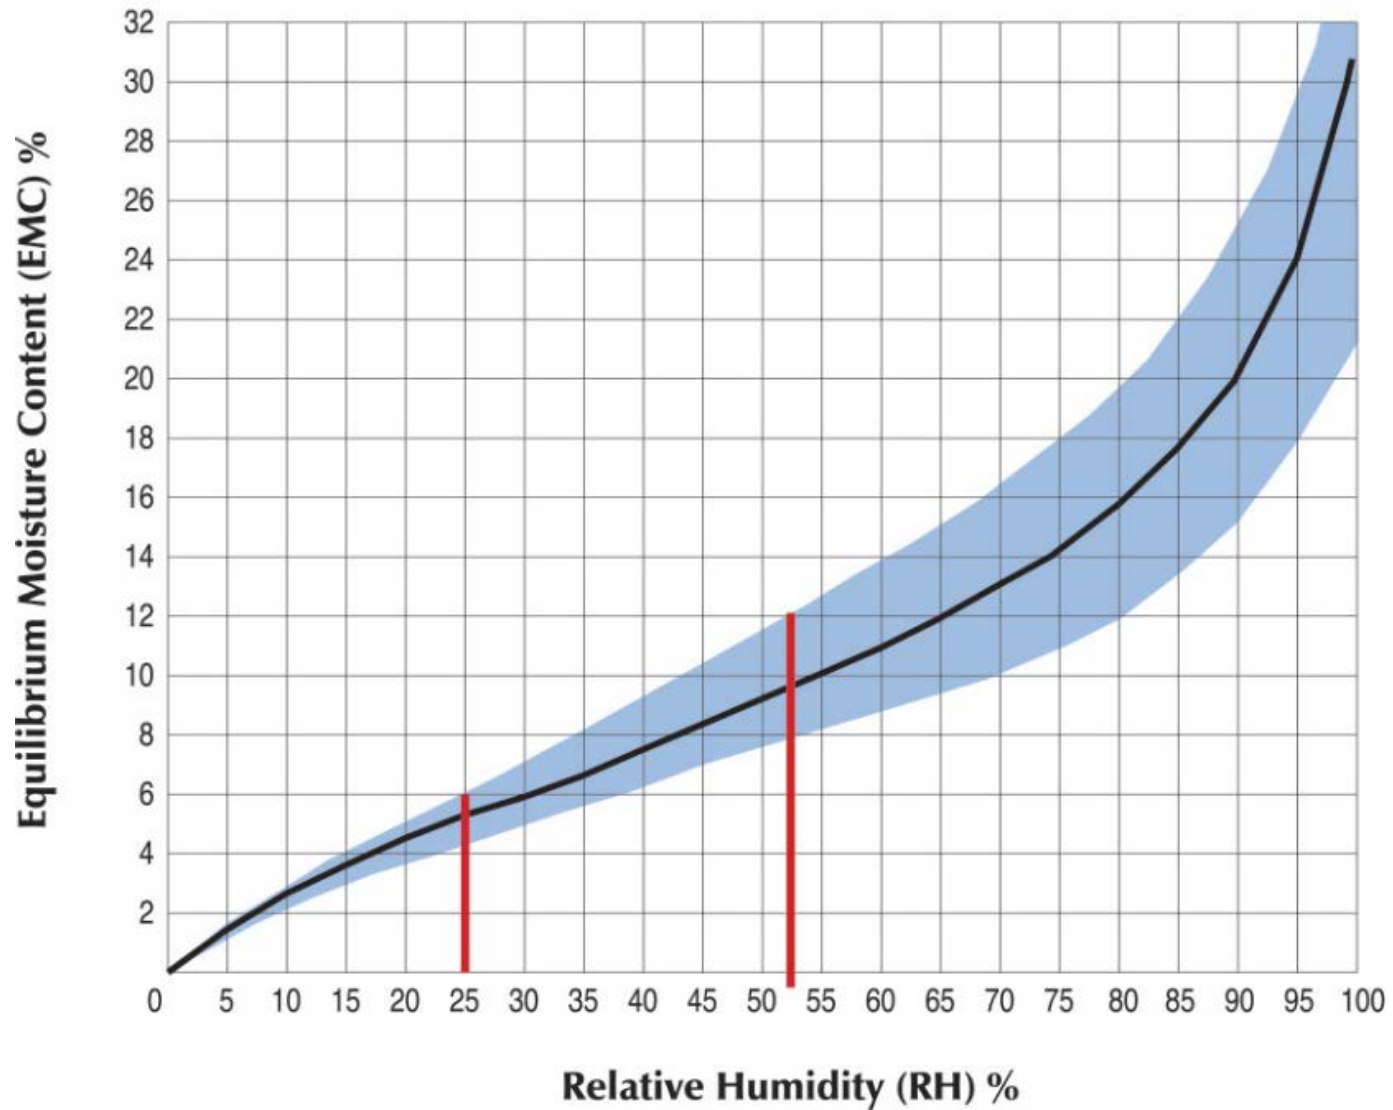

2nd Law of Thermodynamics

Heat Flow Is From Warm To Cold

Moisture Flow Is From Warm To Cold


Moisture Flow Is From More To Less

Air Flow Is From A Higher Pressure to a
Lower Pressure

Gravity Acts Down






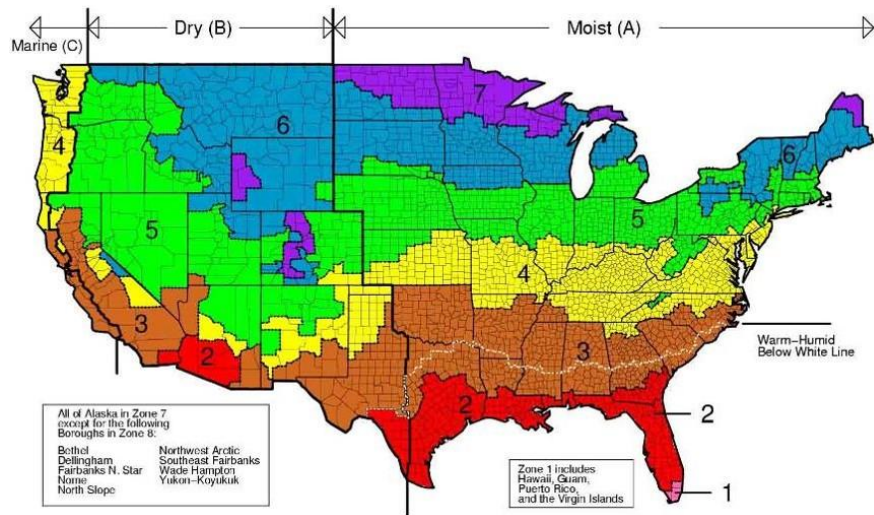


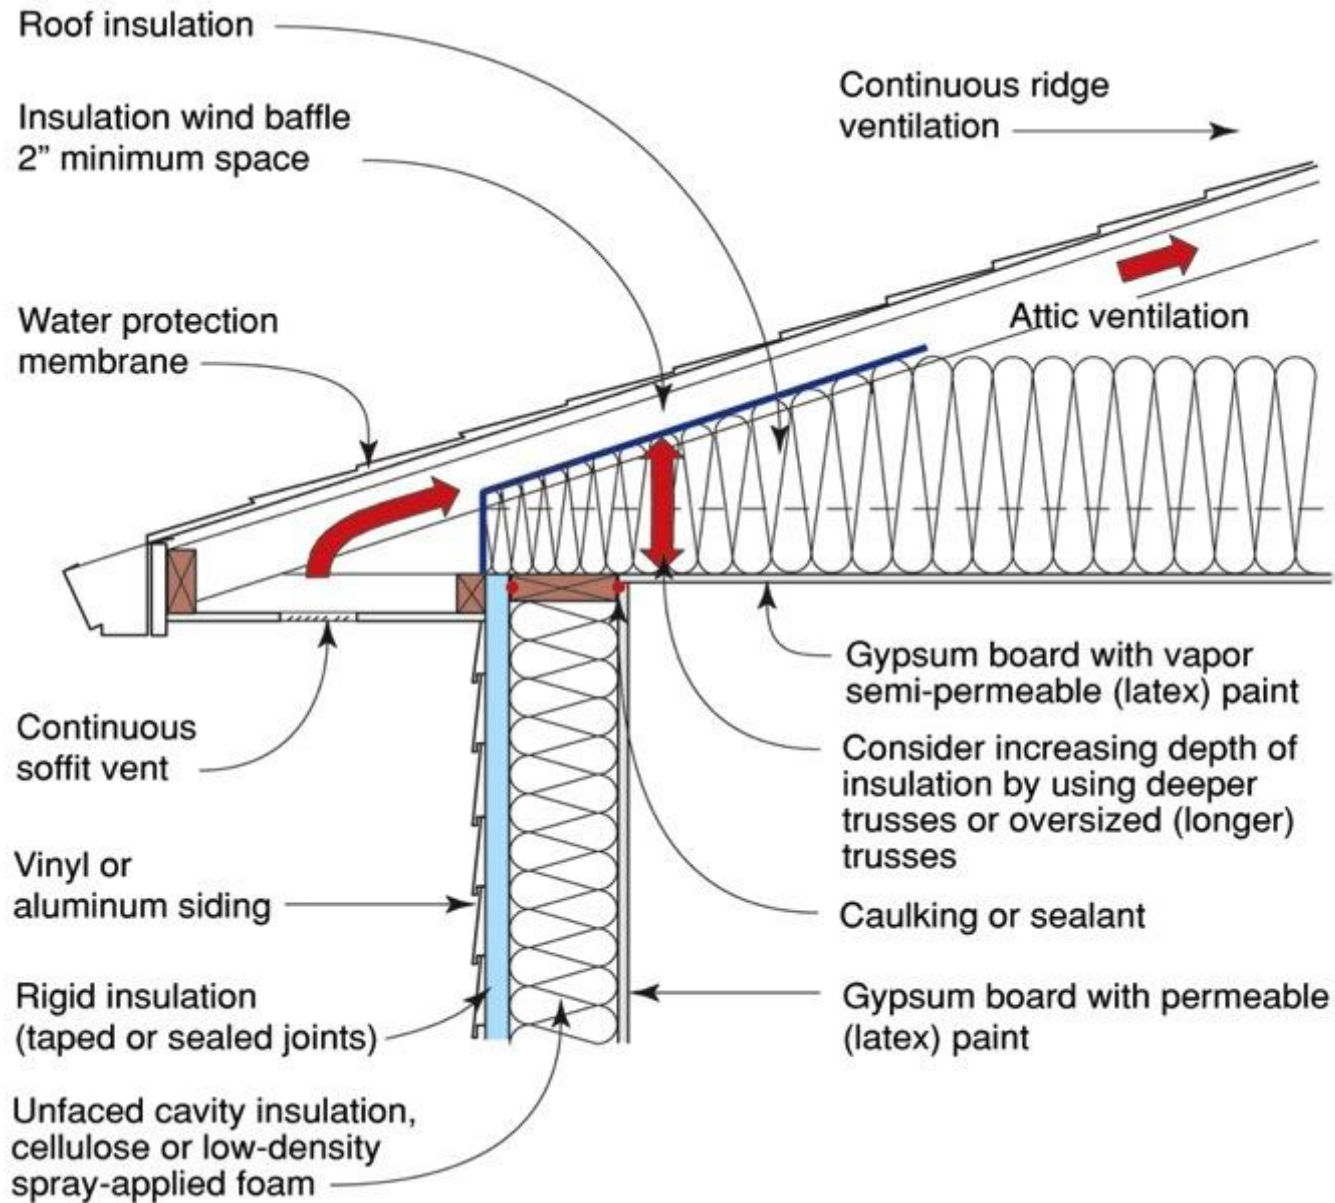






Exposure

Extreme		Over 60"
High		40" - 60"
Moderate		20" - 40"
Low		Under 20"

Vented Attics Are Climate Dependant



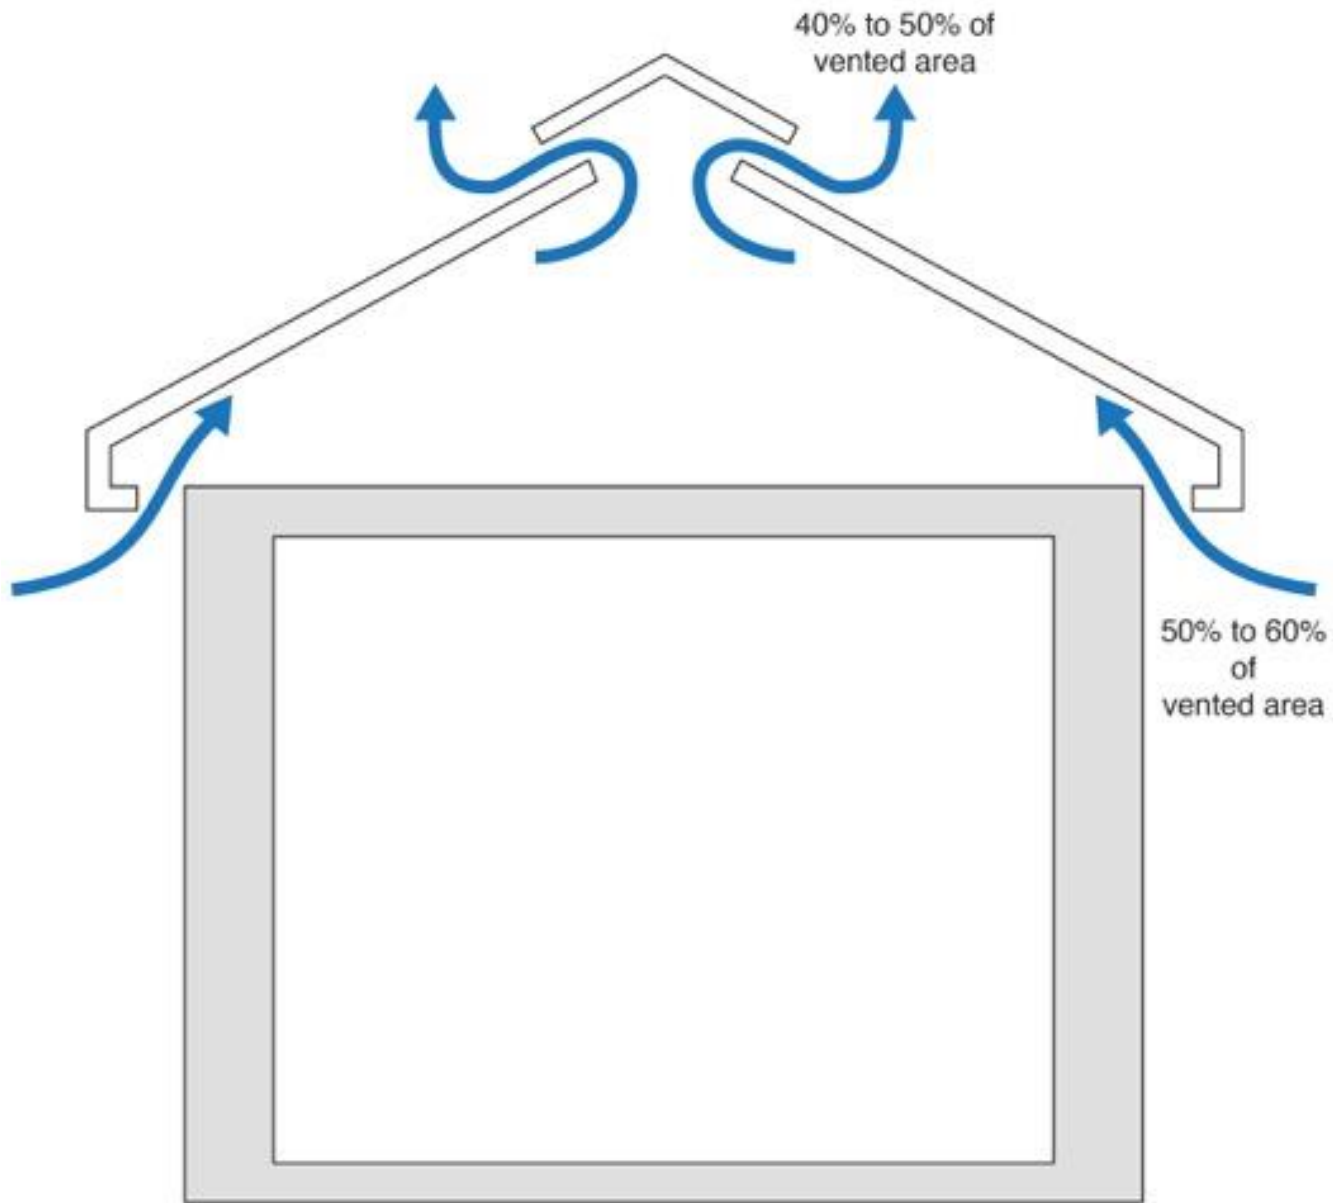

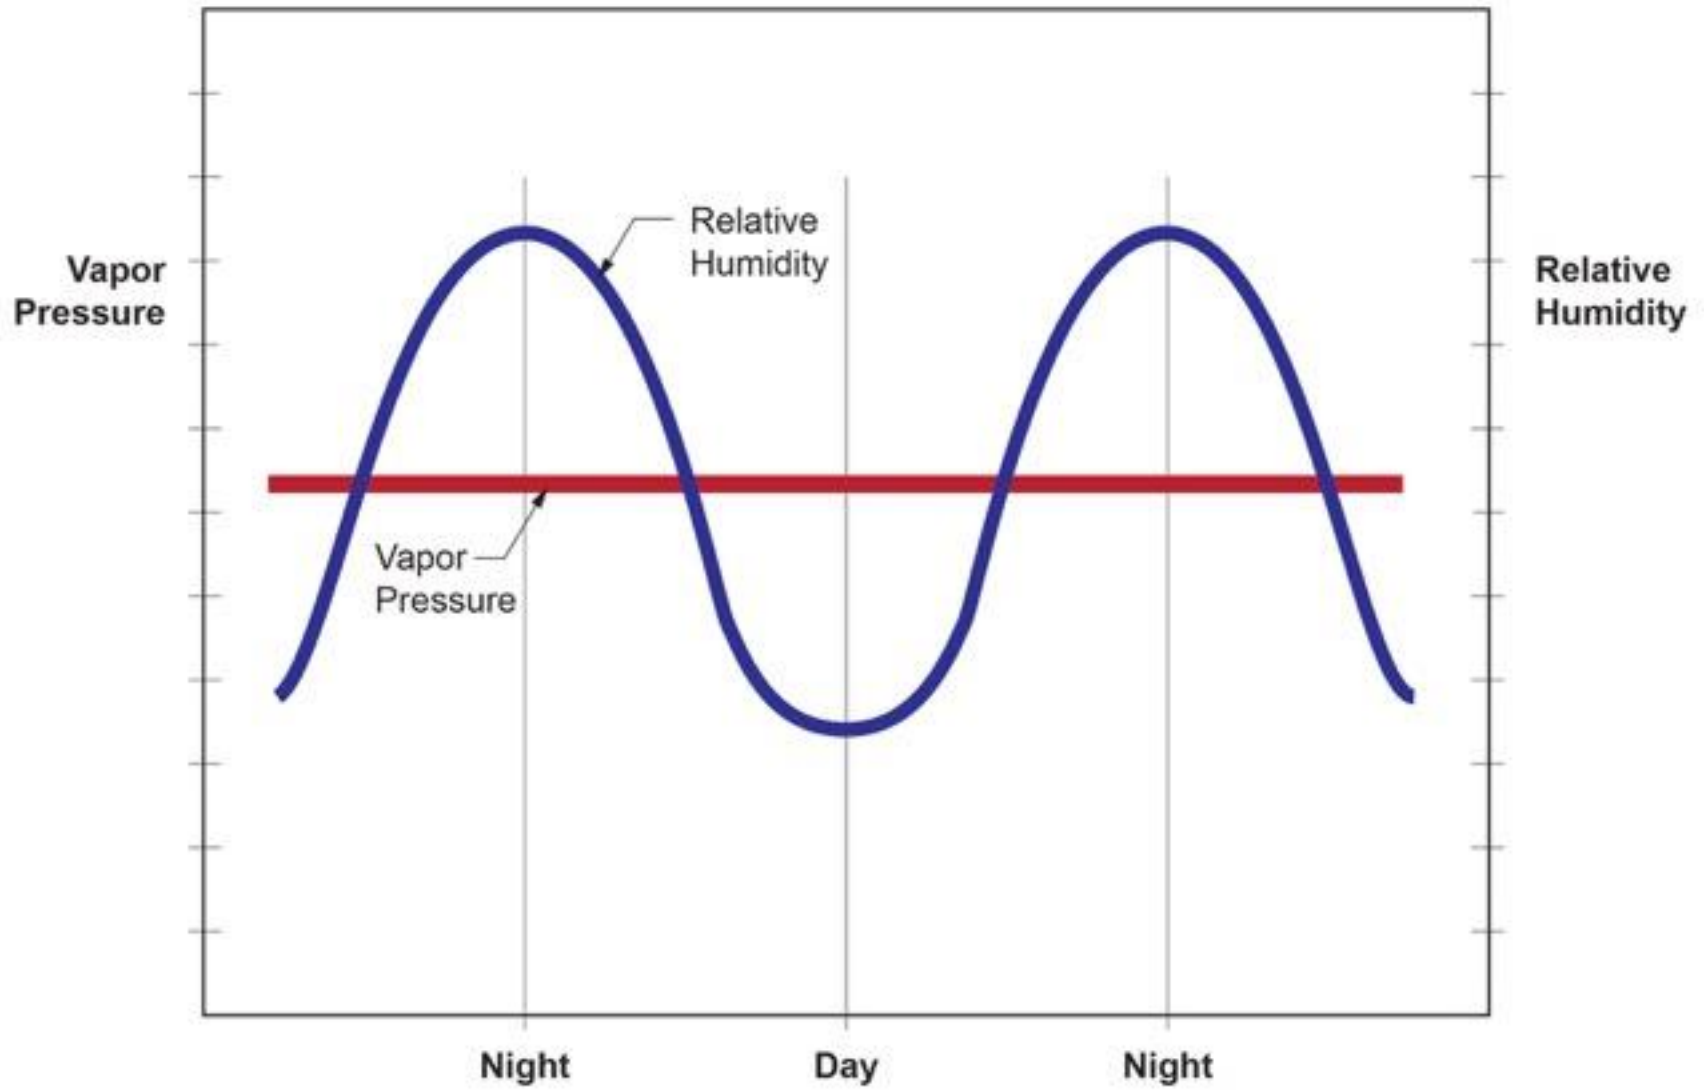



Houses With Vented Attics Suck


Houses With Vented Attics Suck
Not all the Time.....but.....





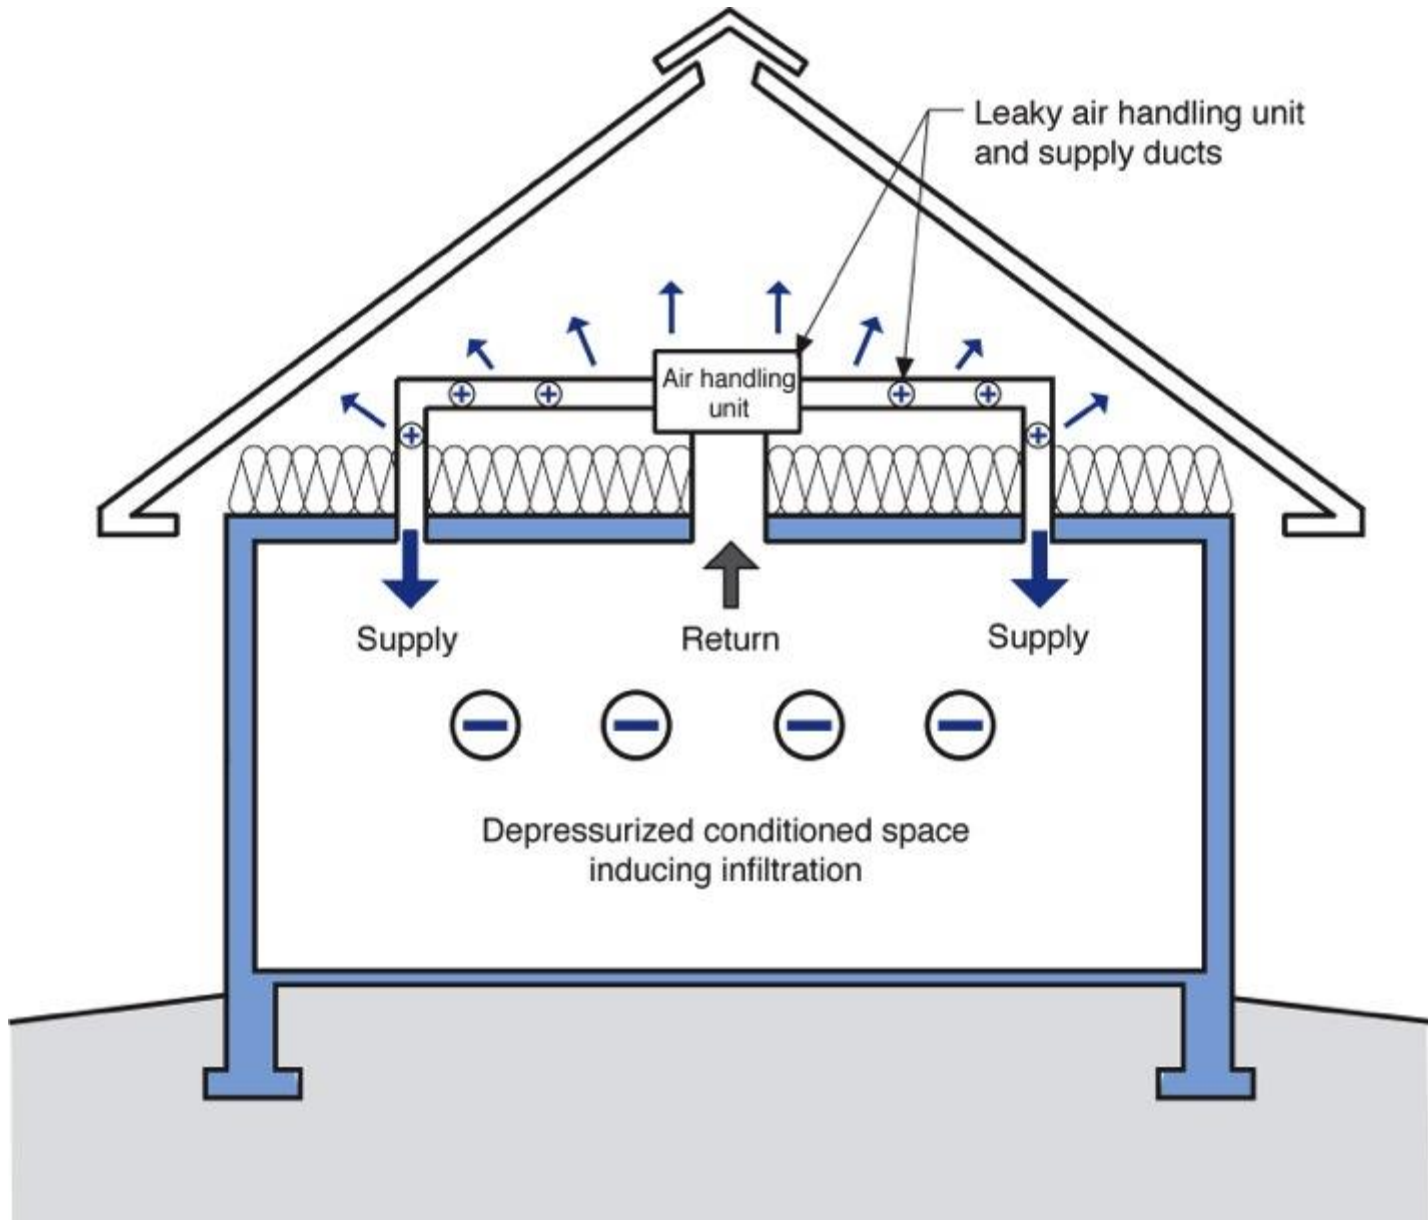

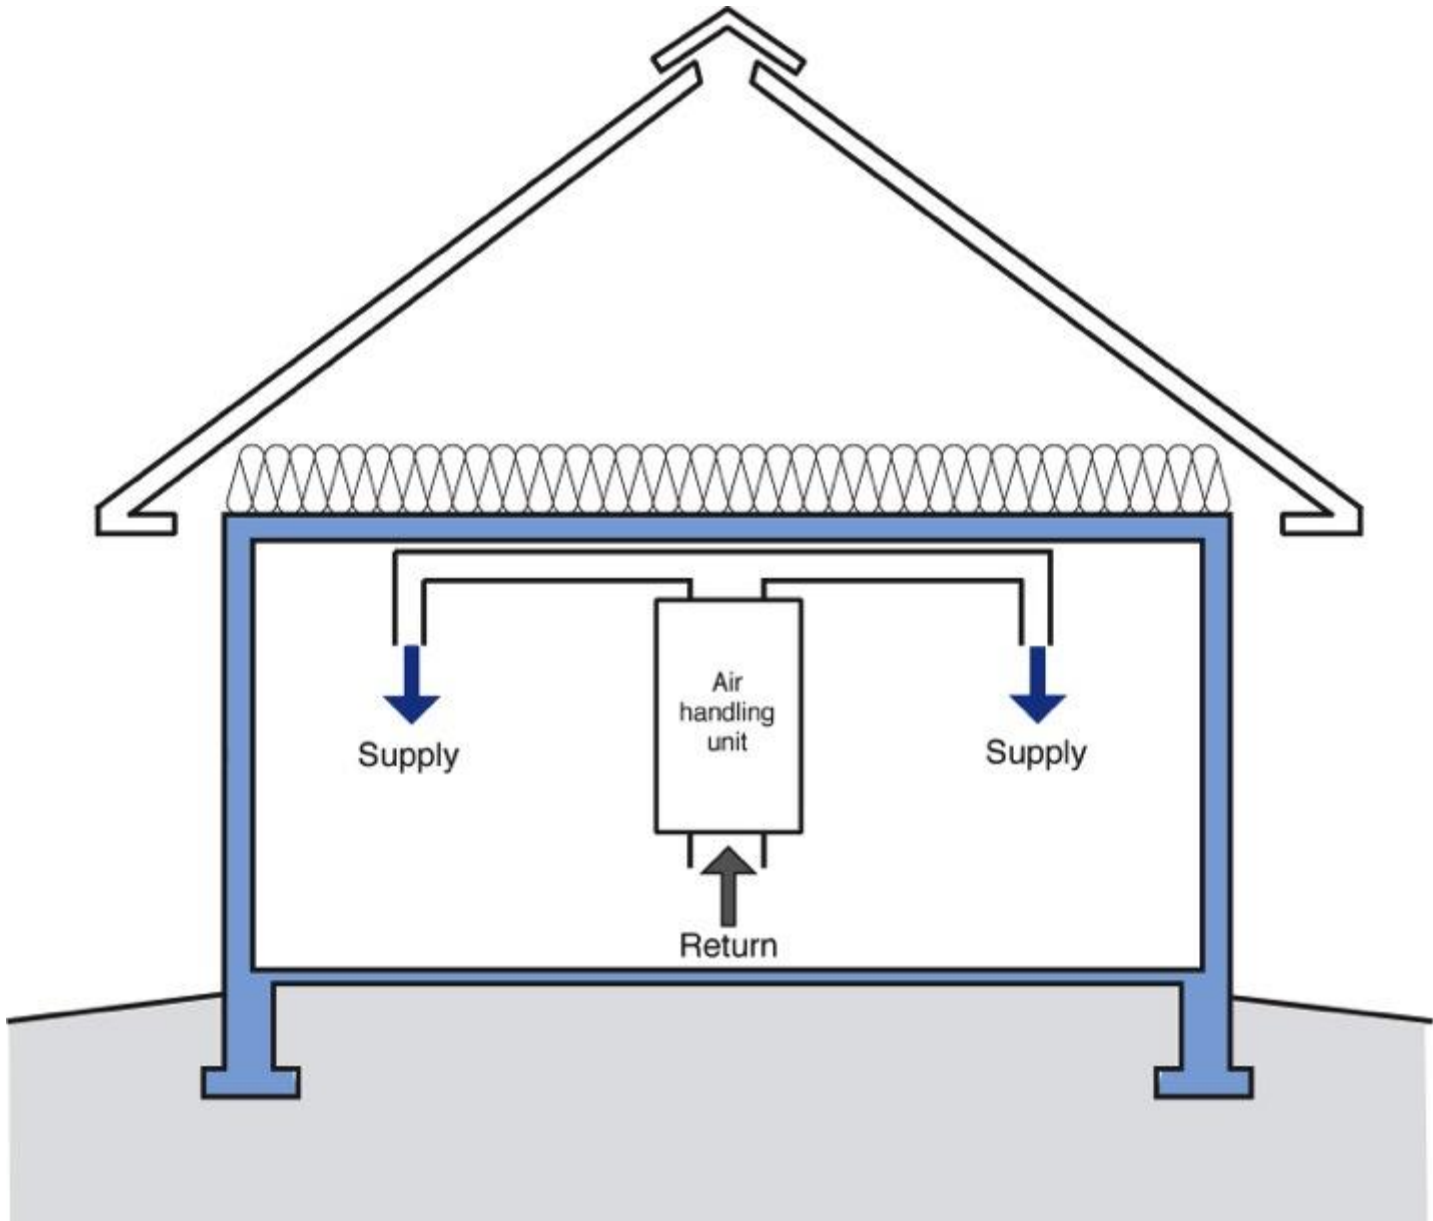


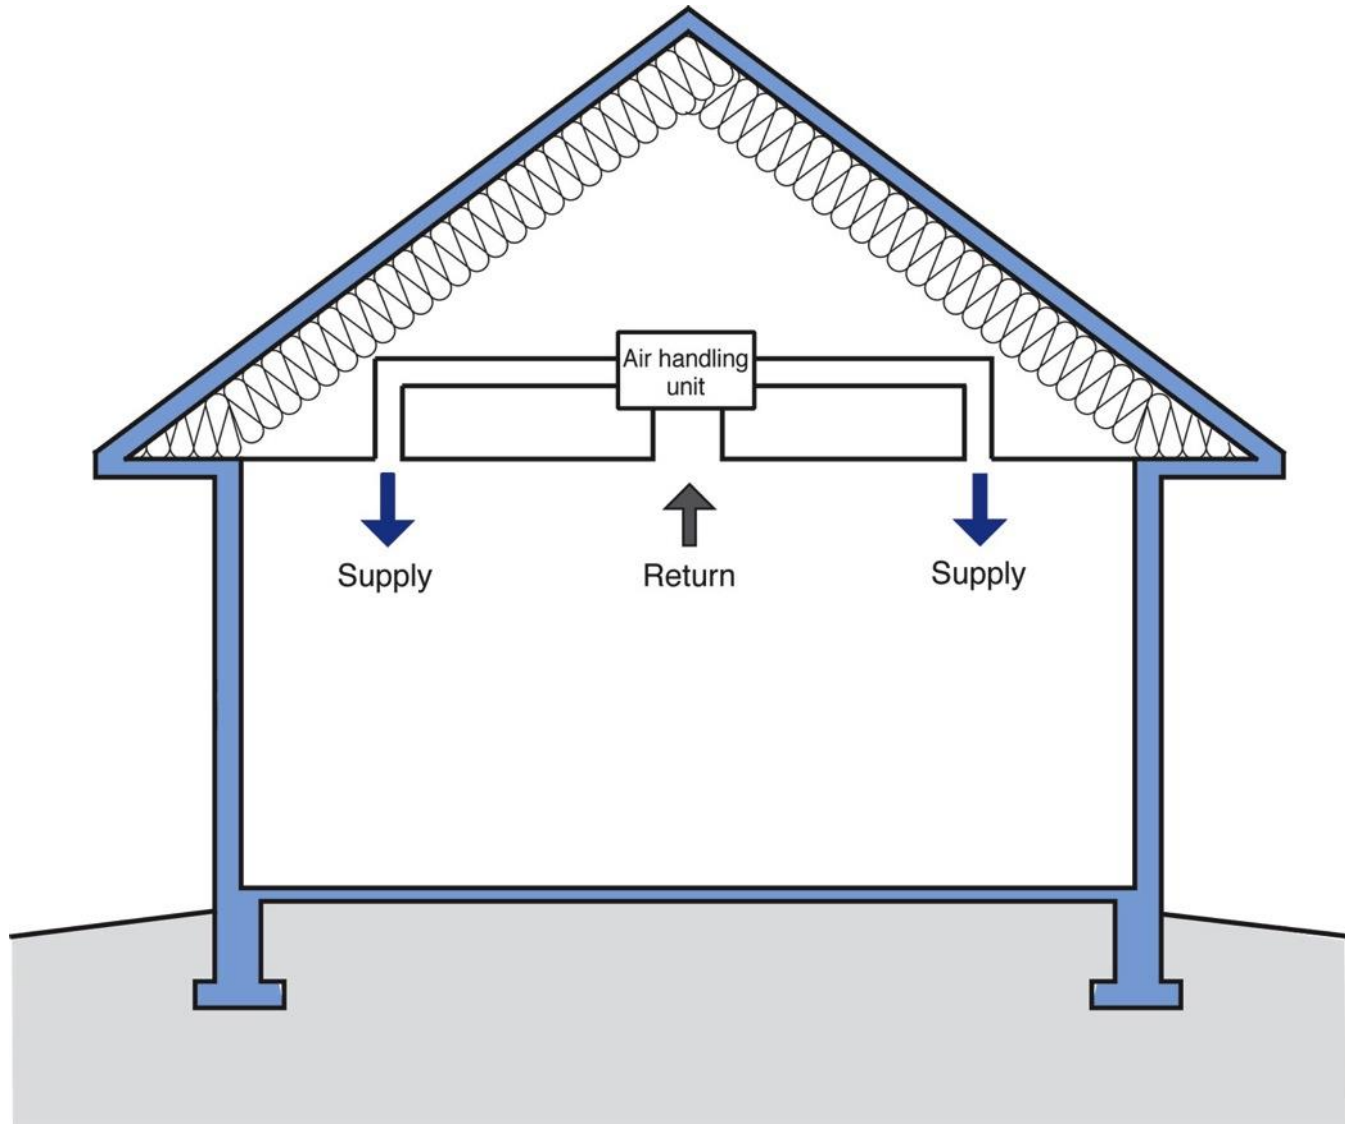









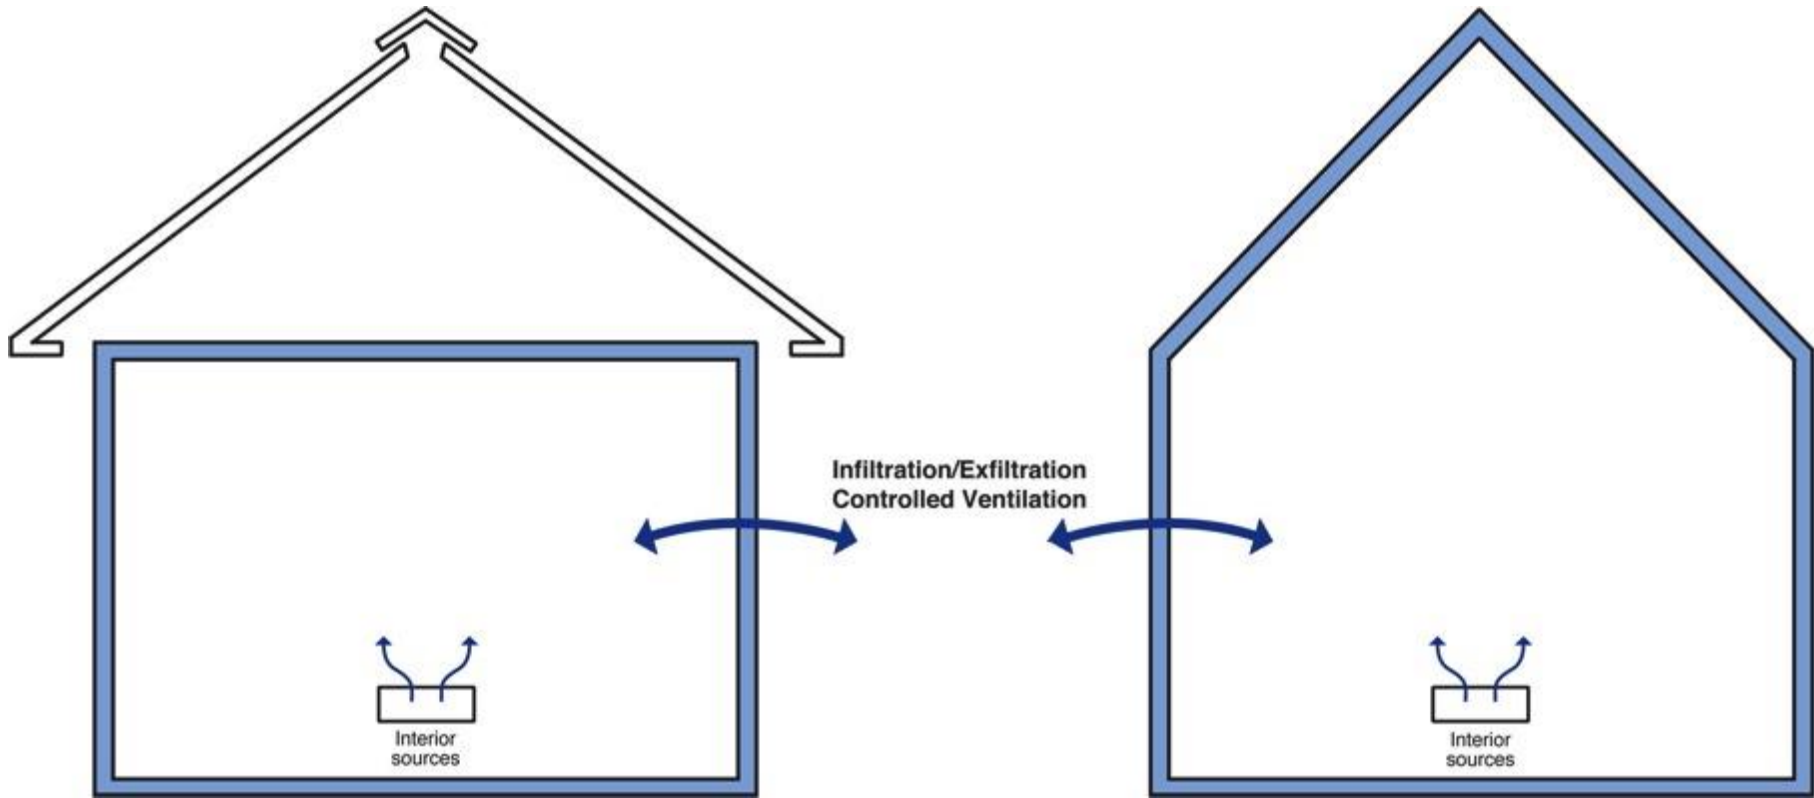

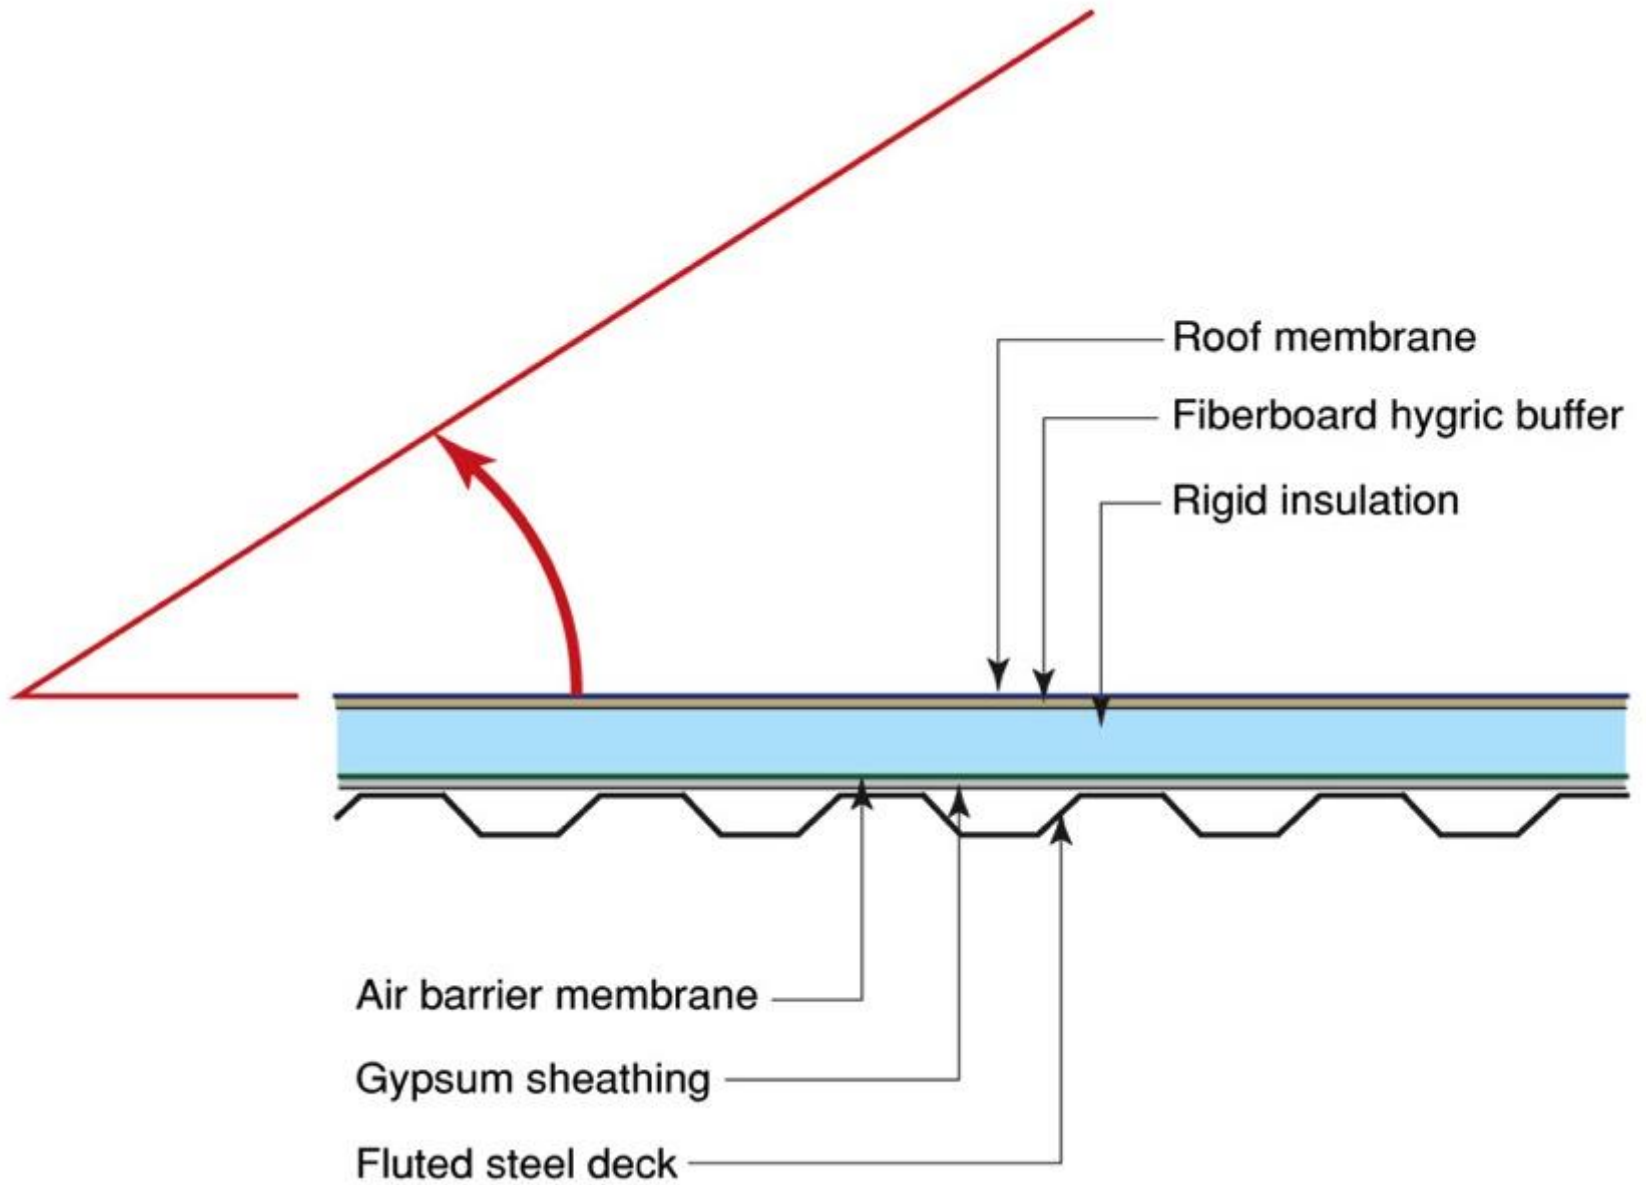

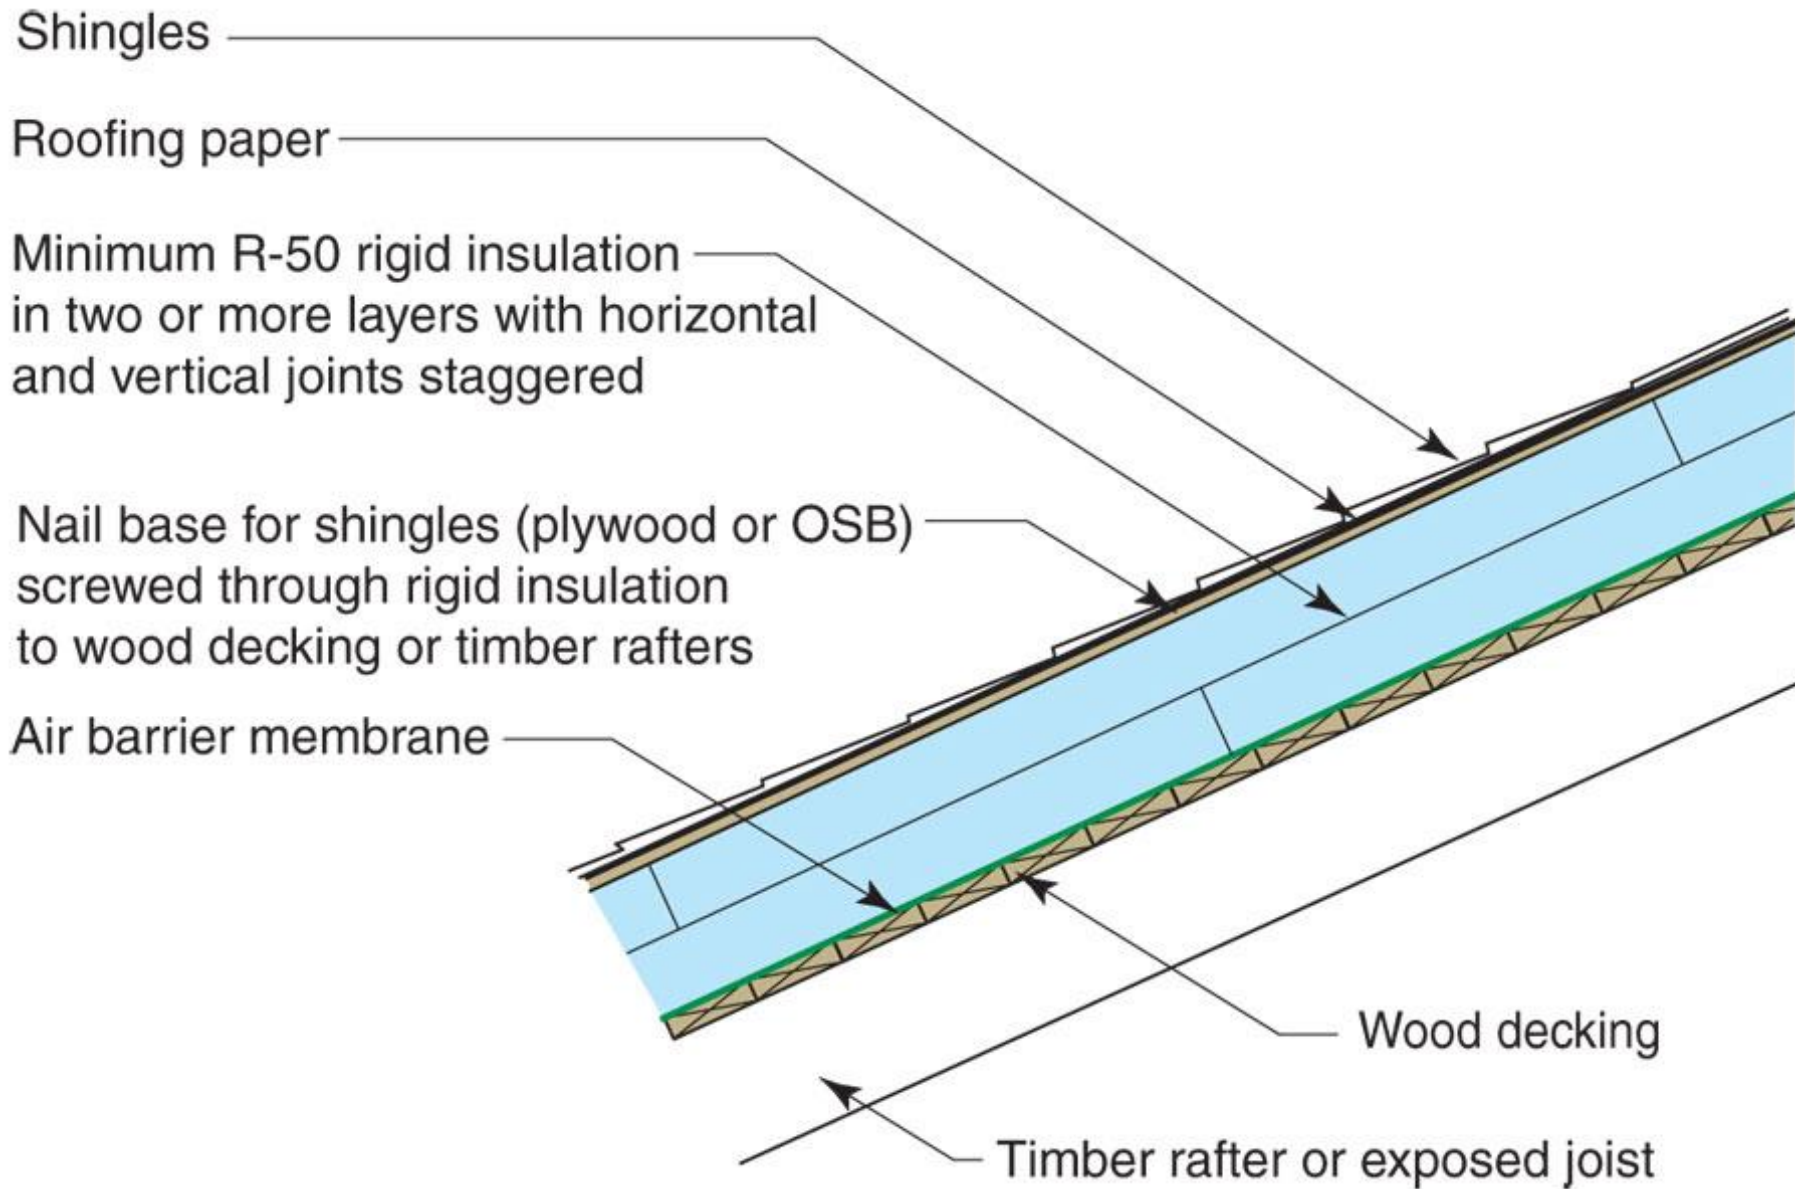












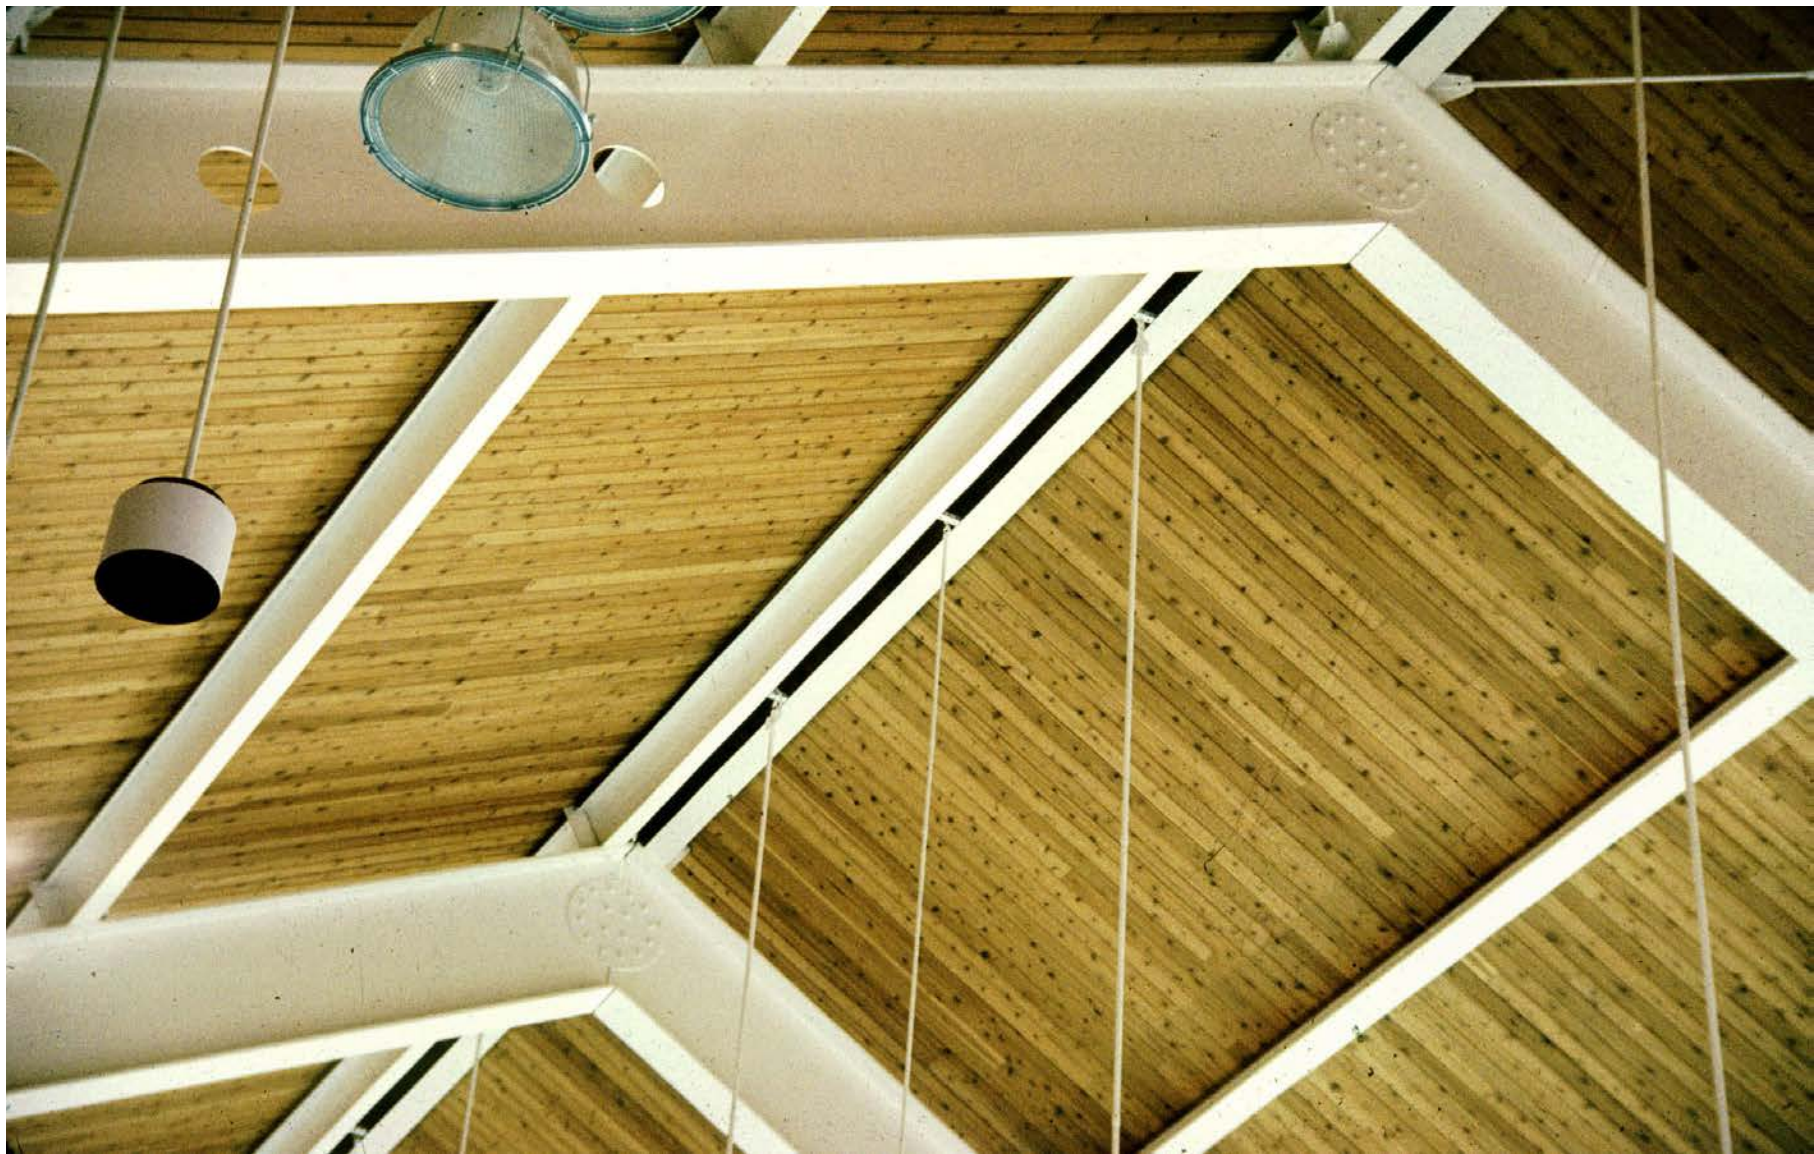











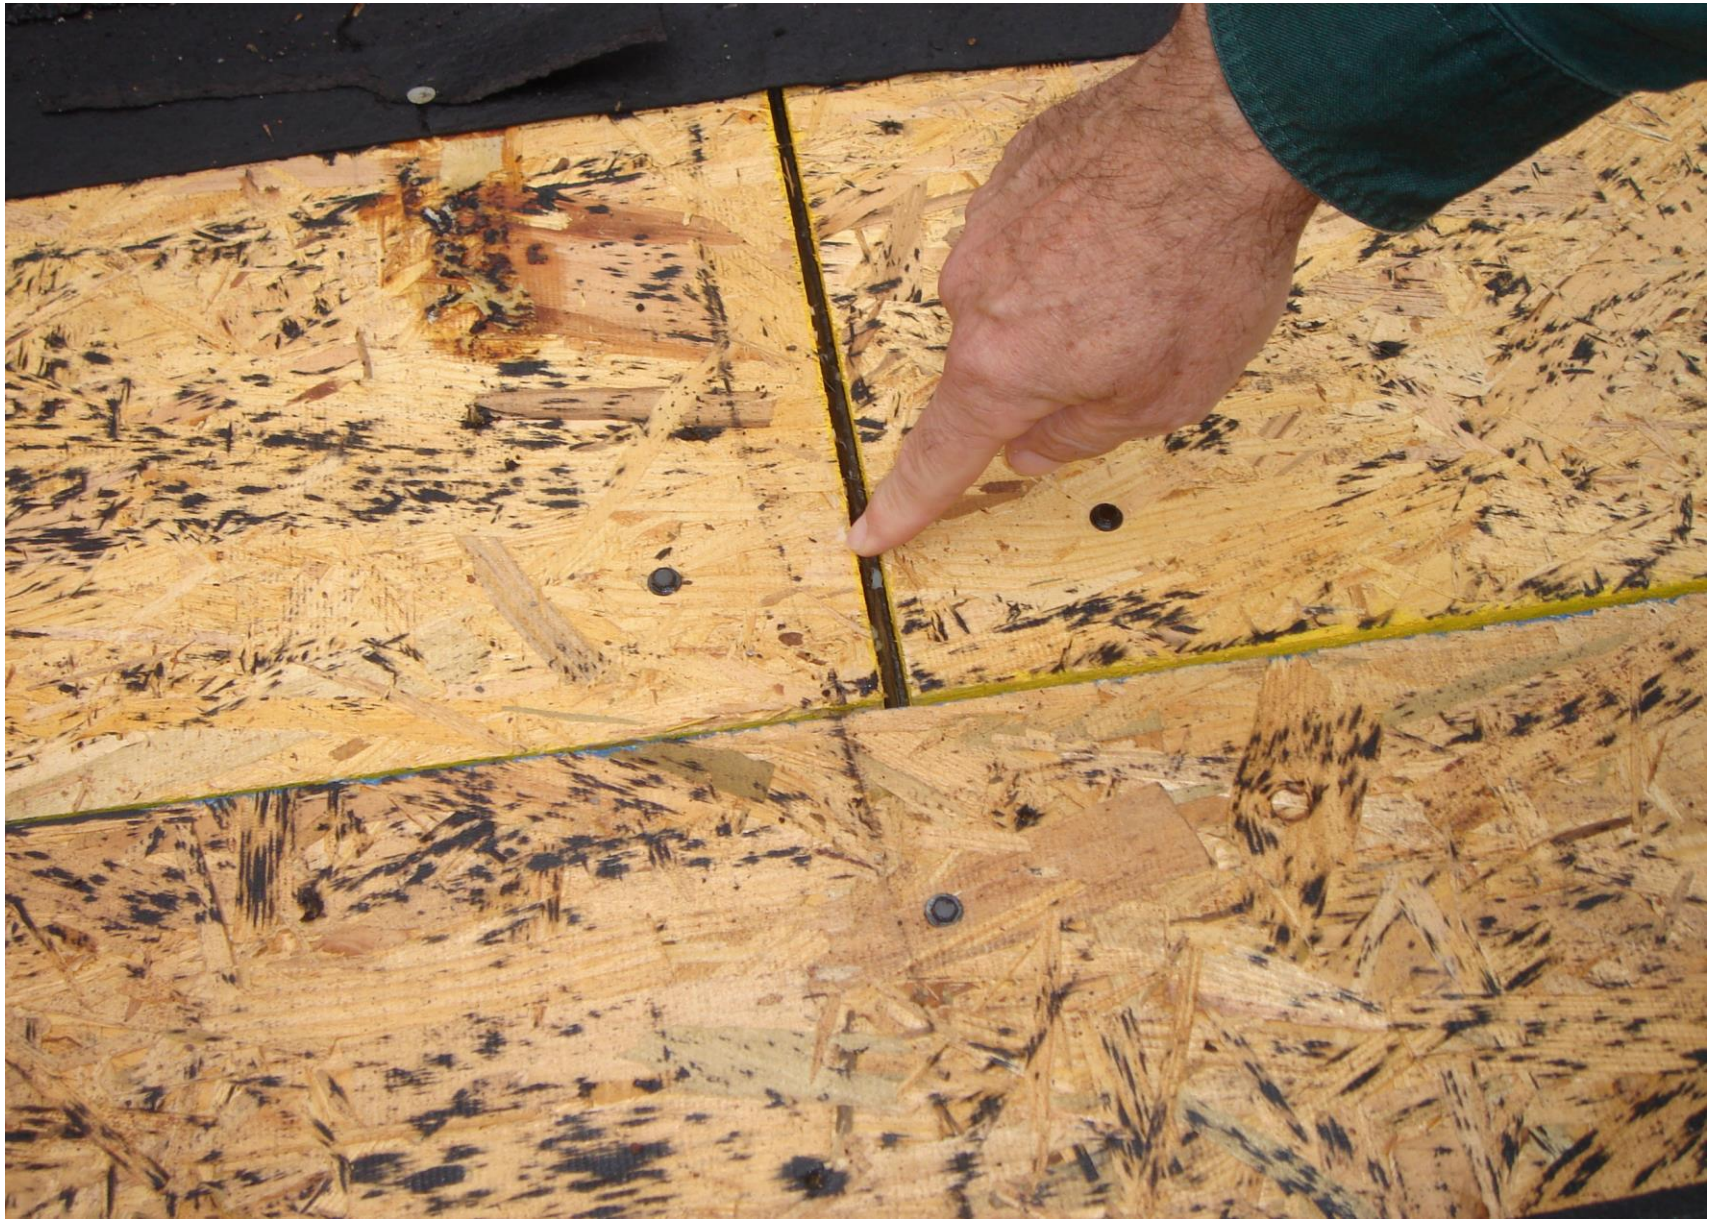





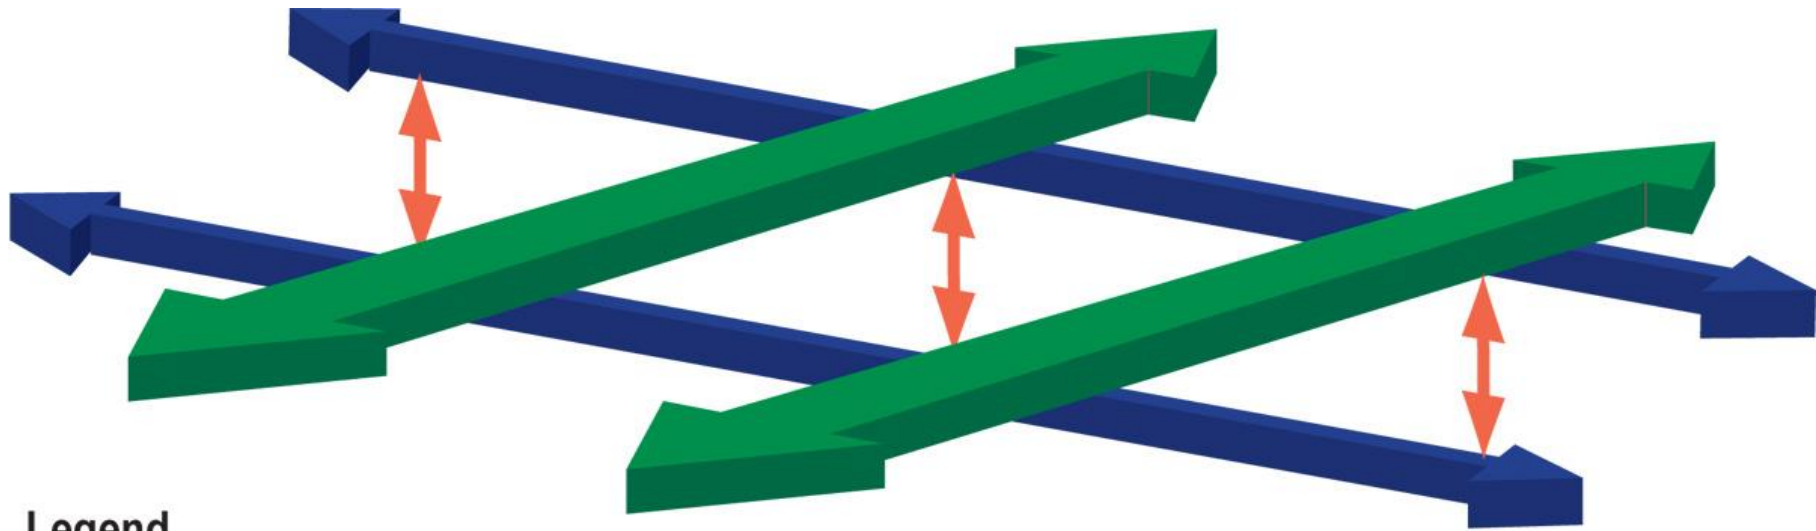


Legend

- ←→ Upper level air flows
- ←→ Lower level air flows
- ↕ Air flow at panel joints

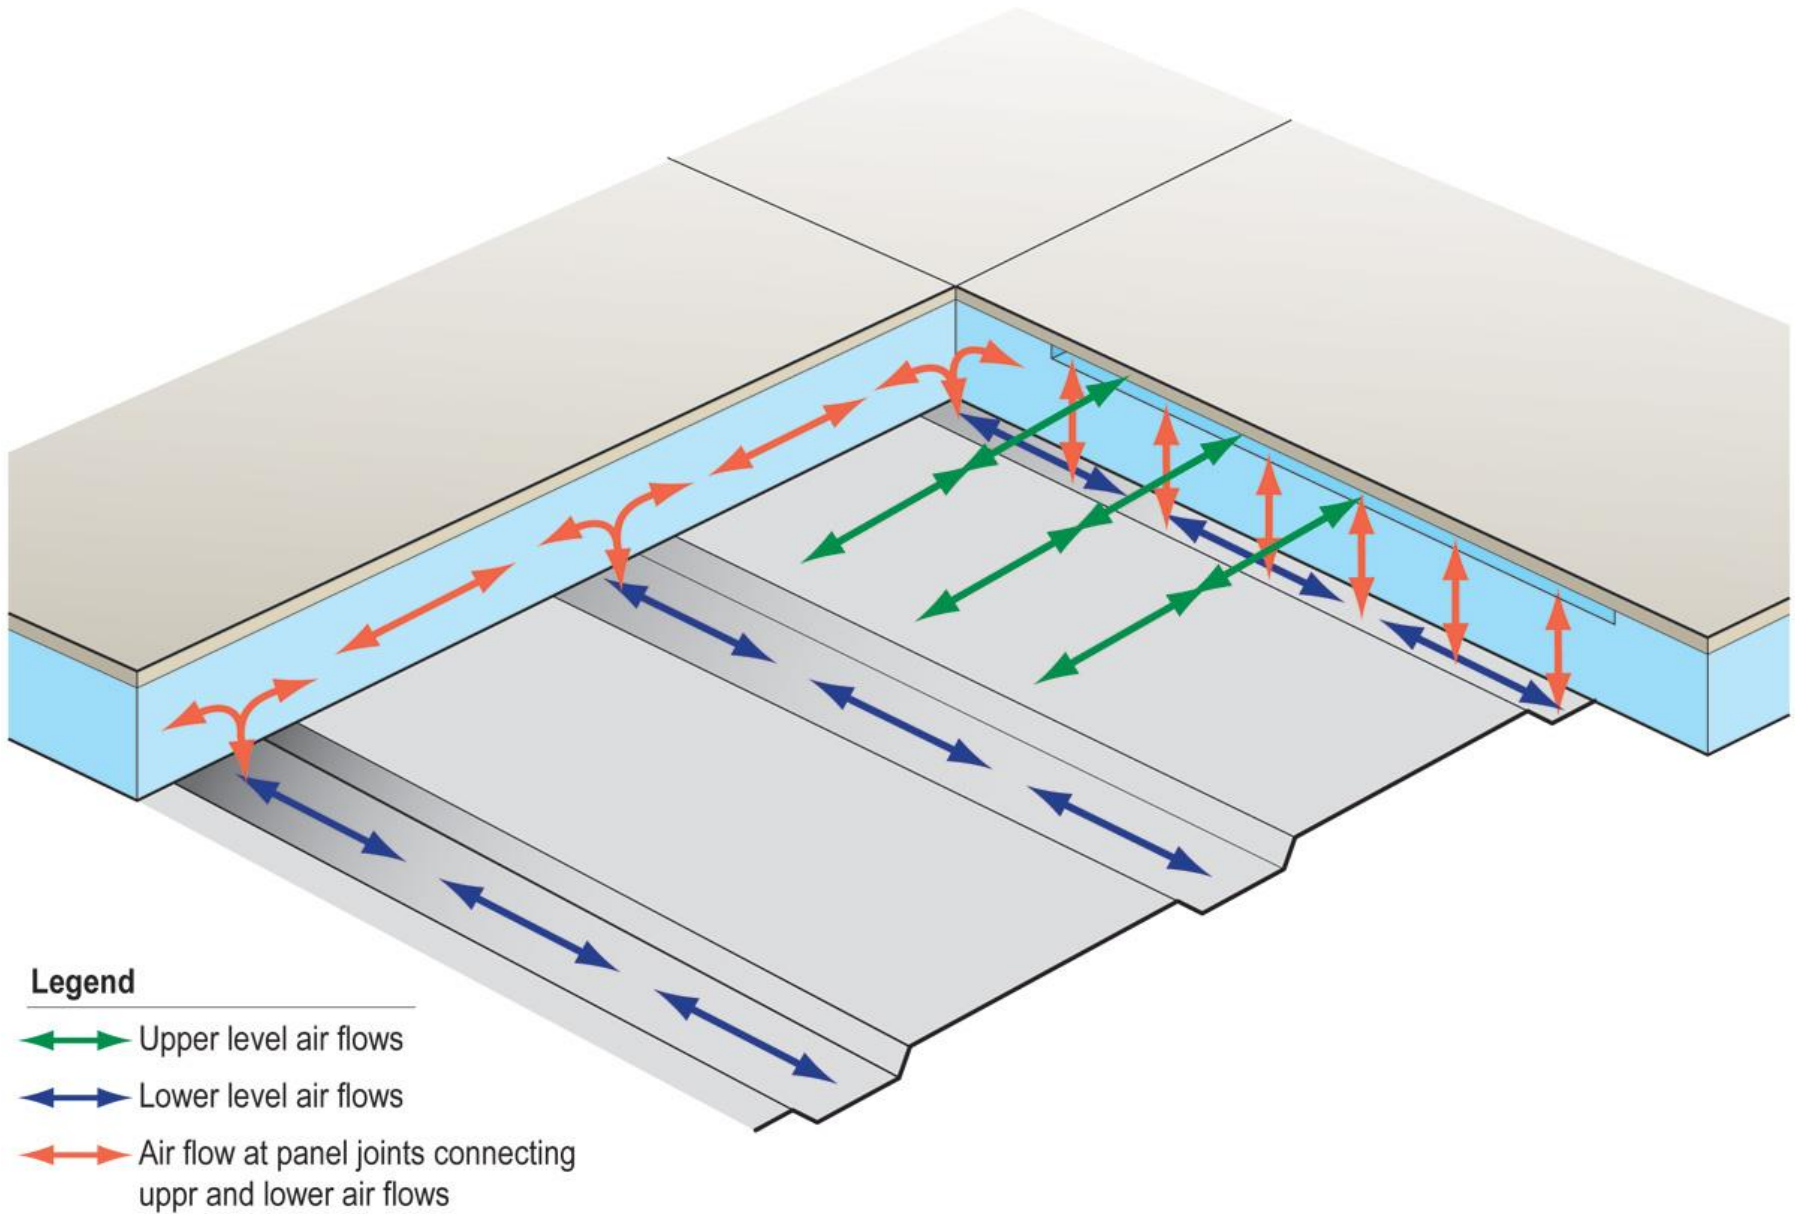

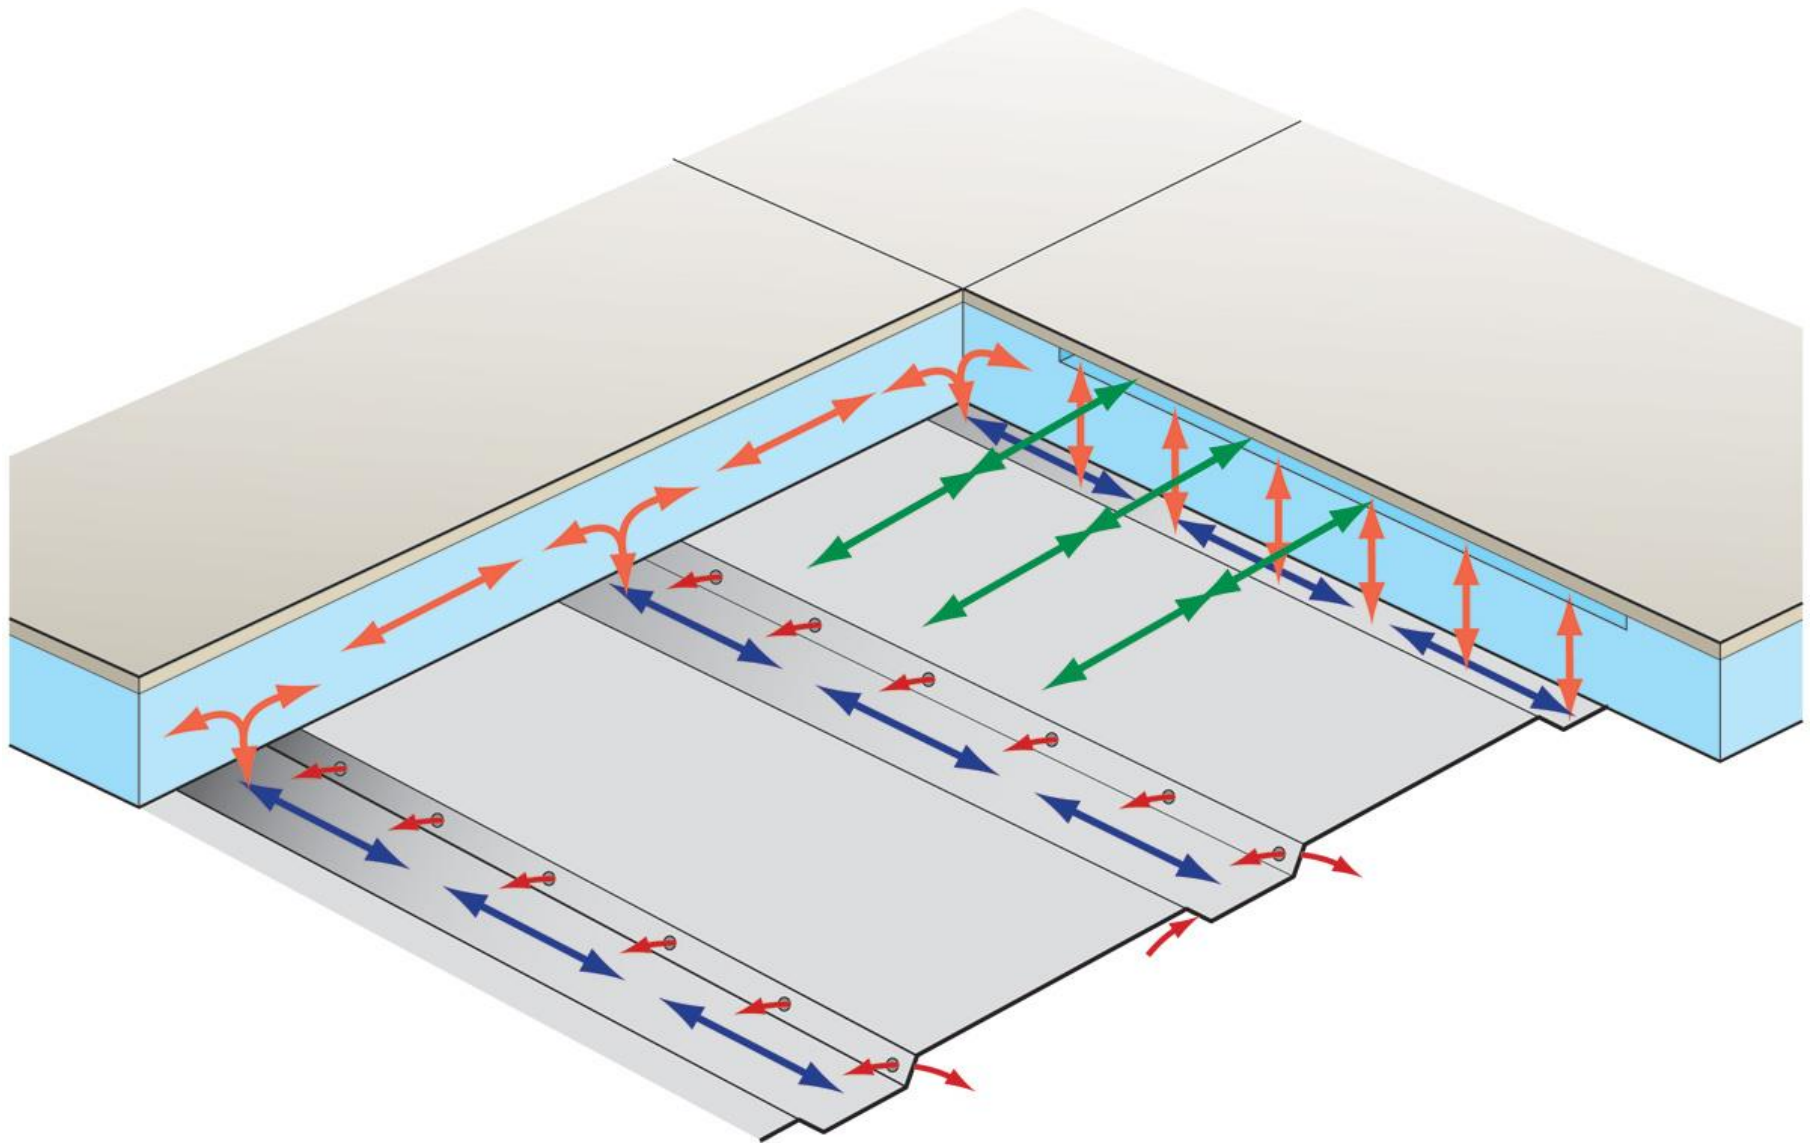



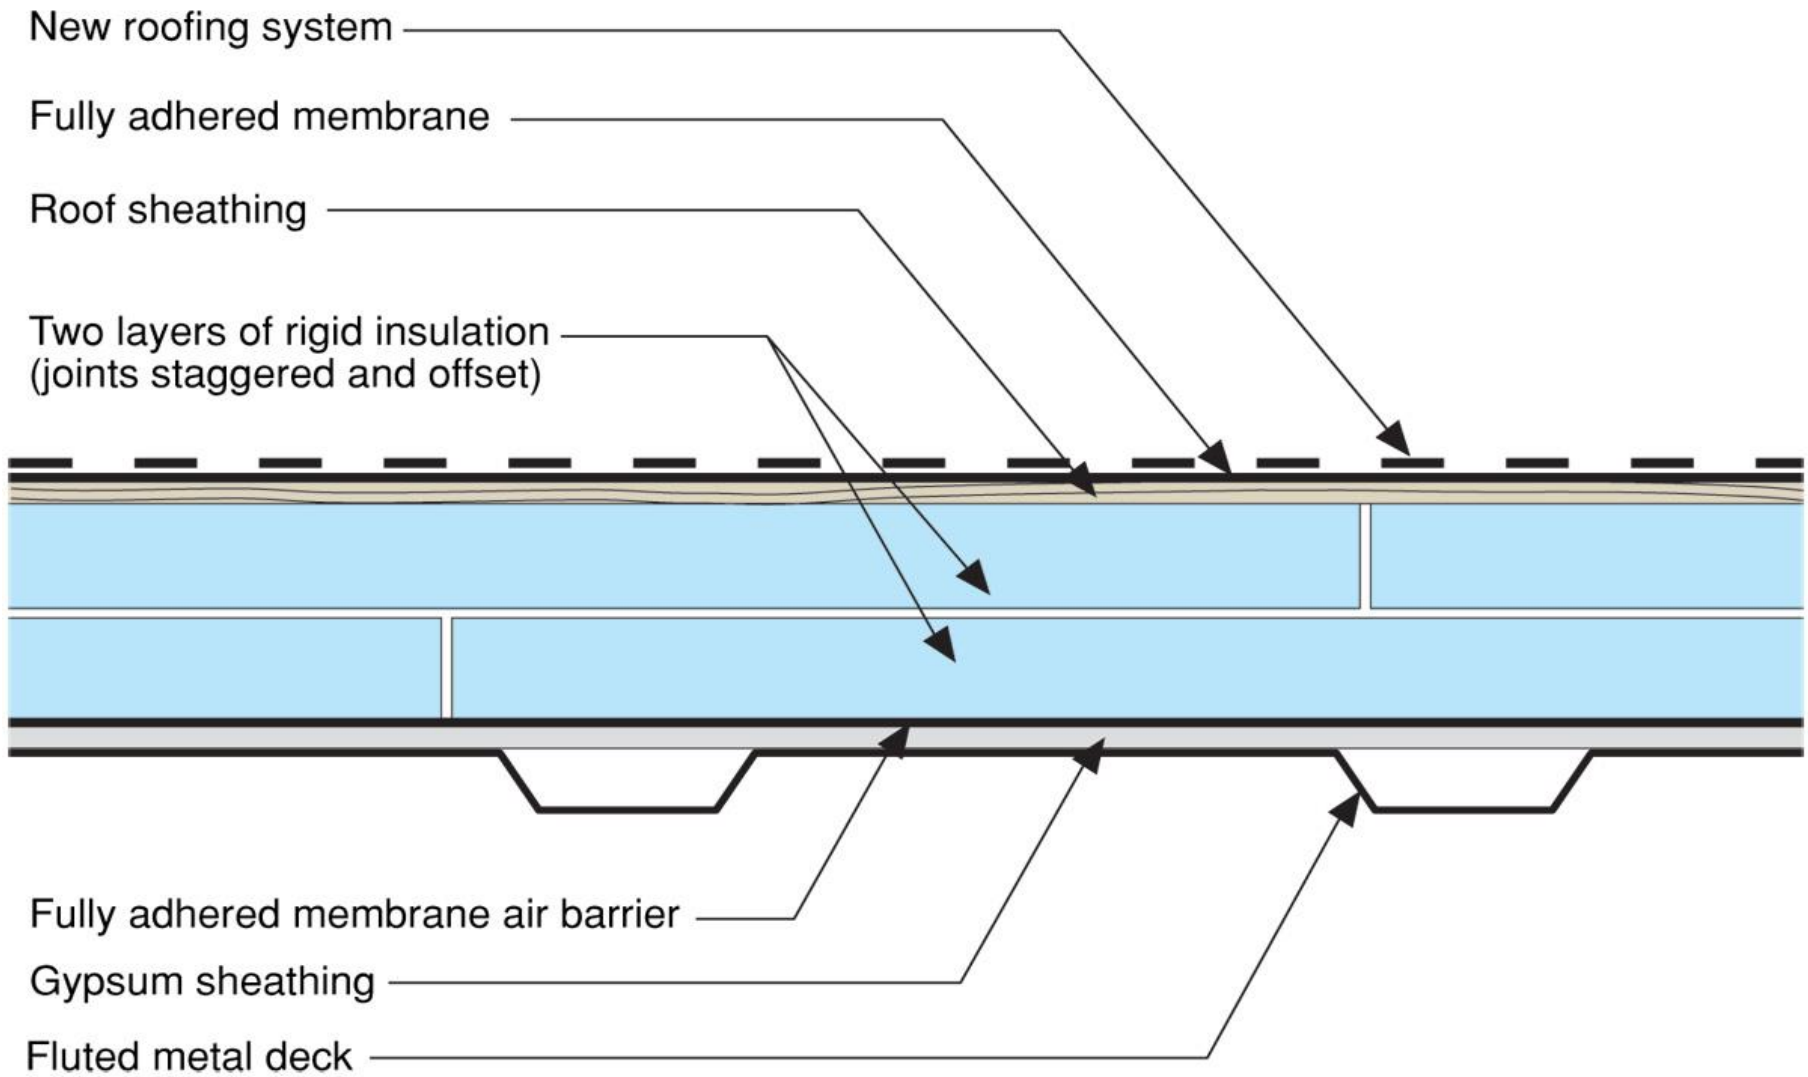











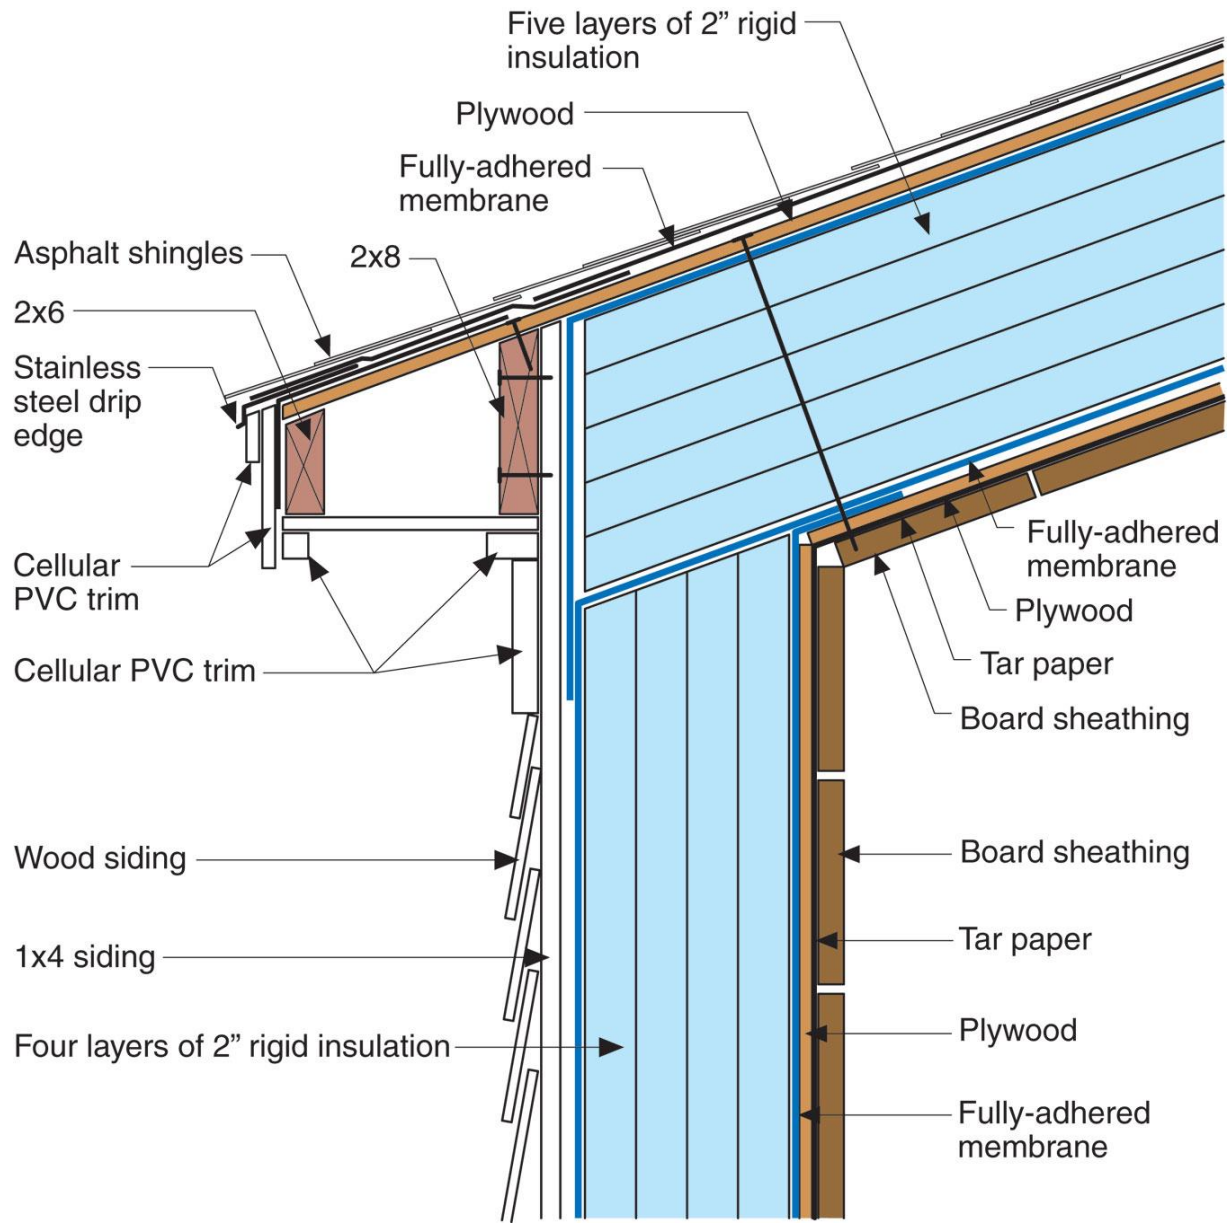






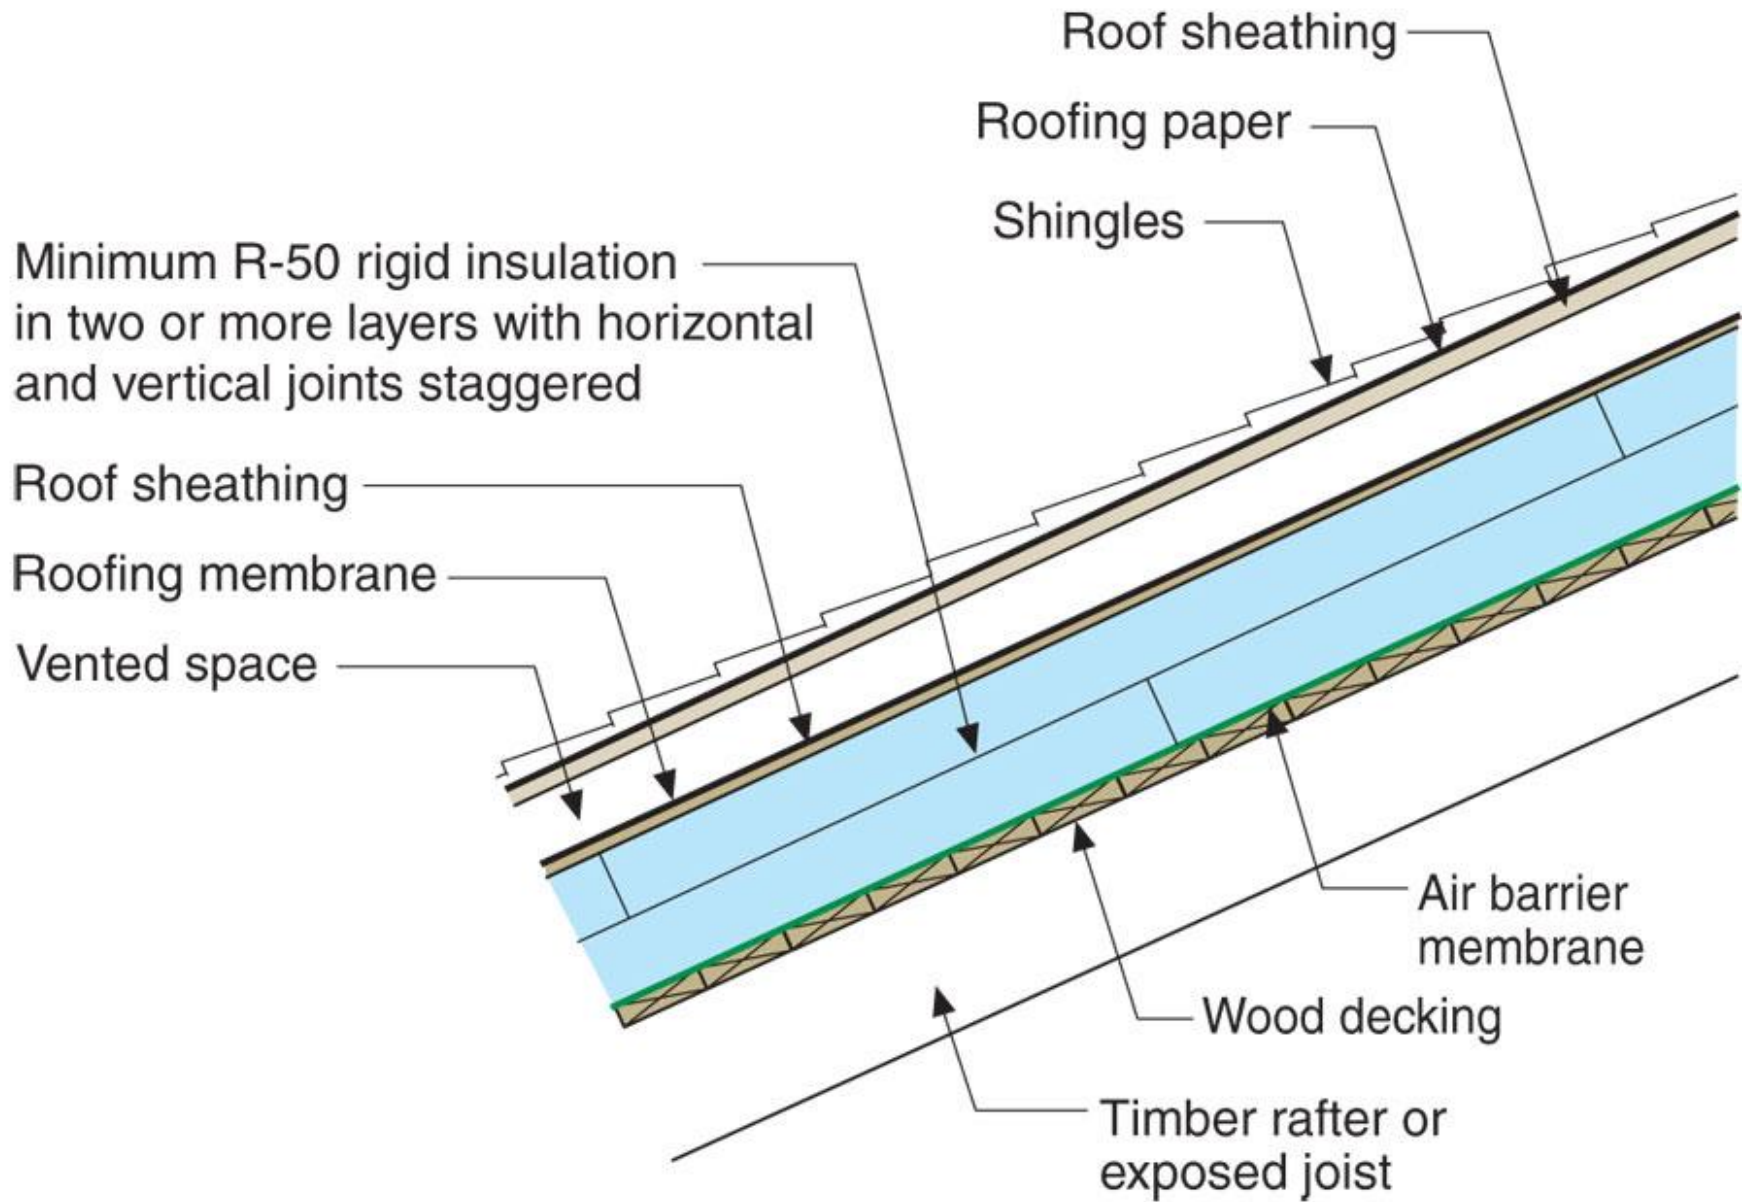





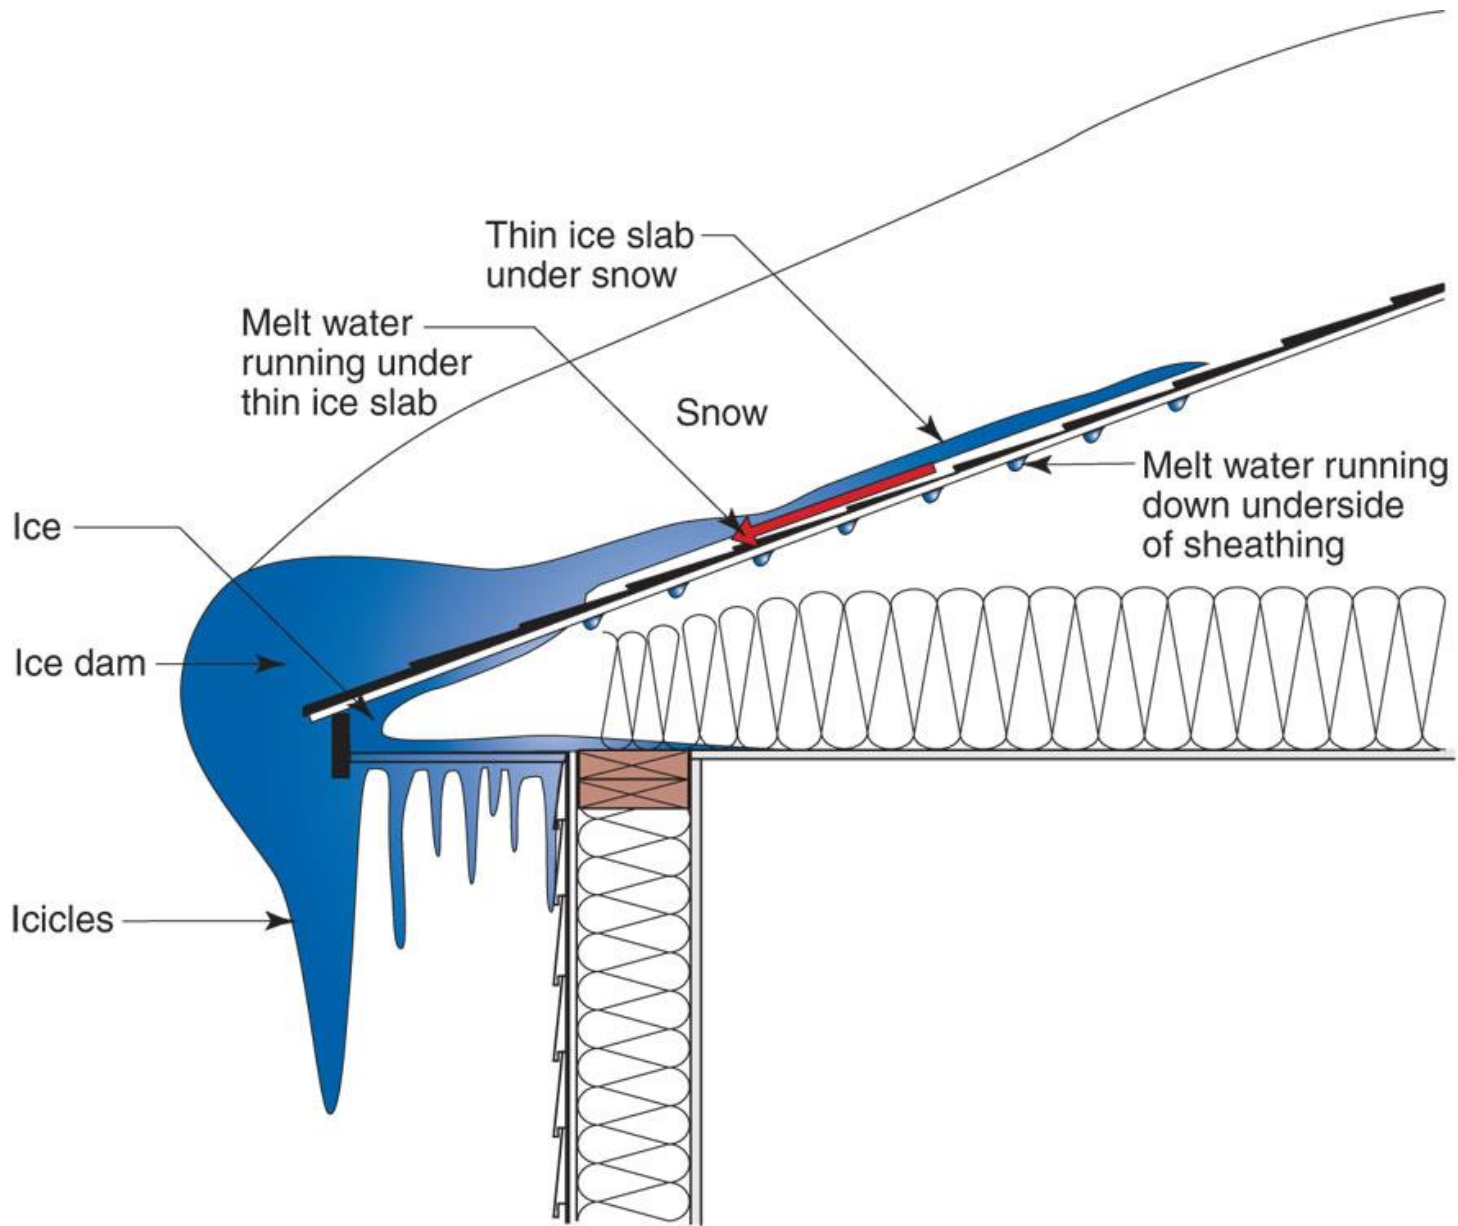











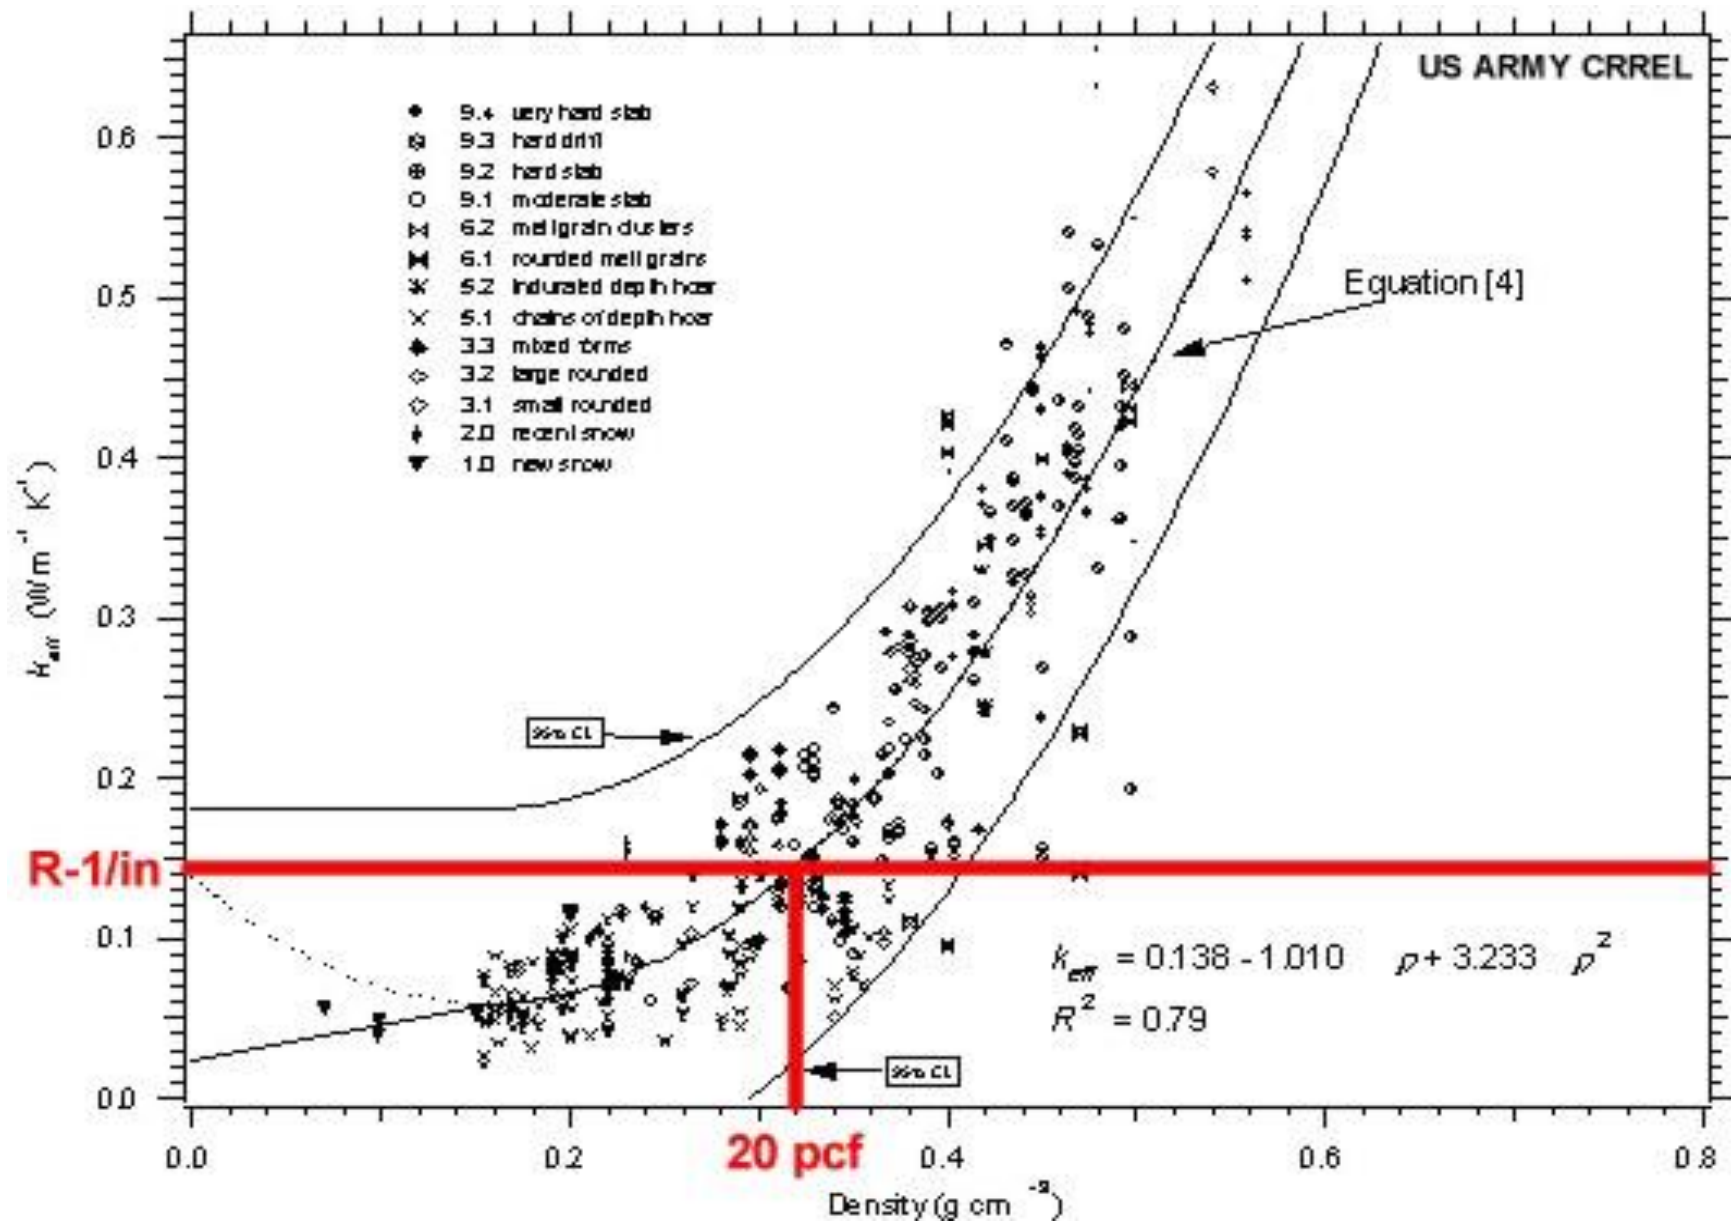





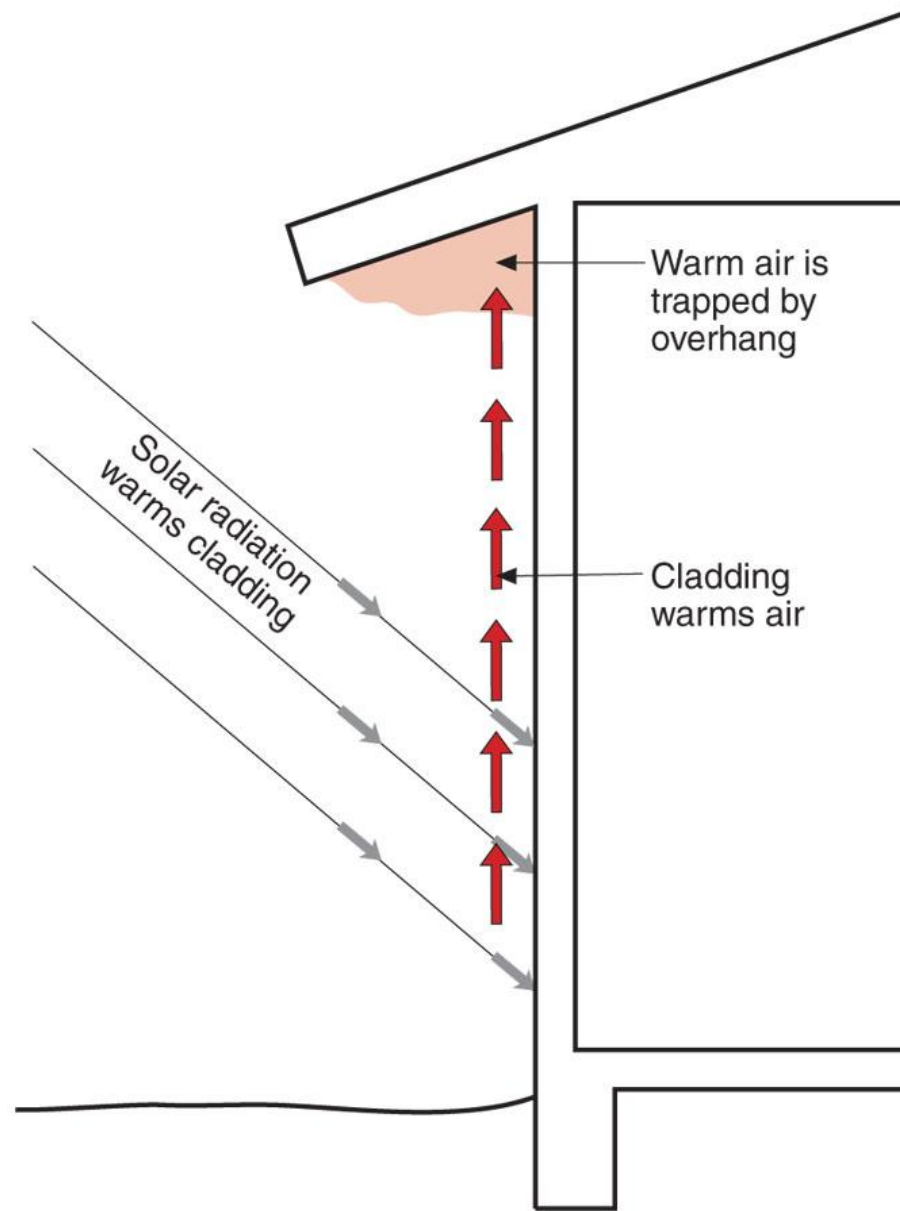











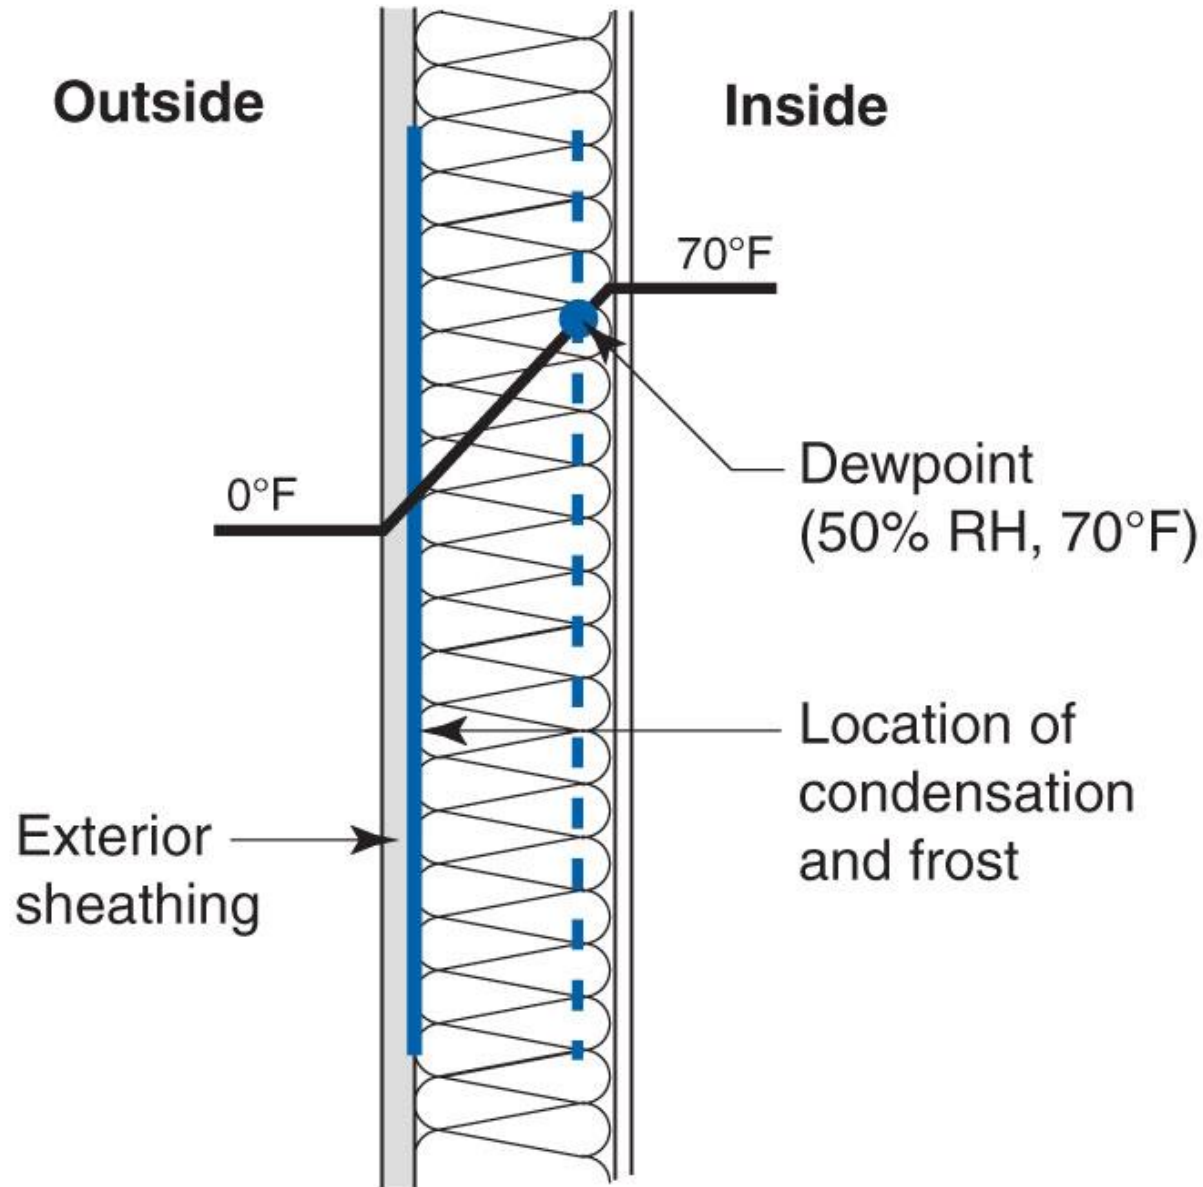




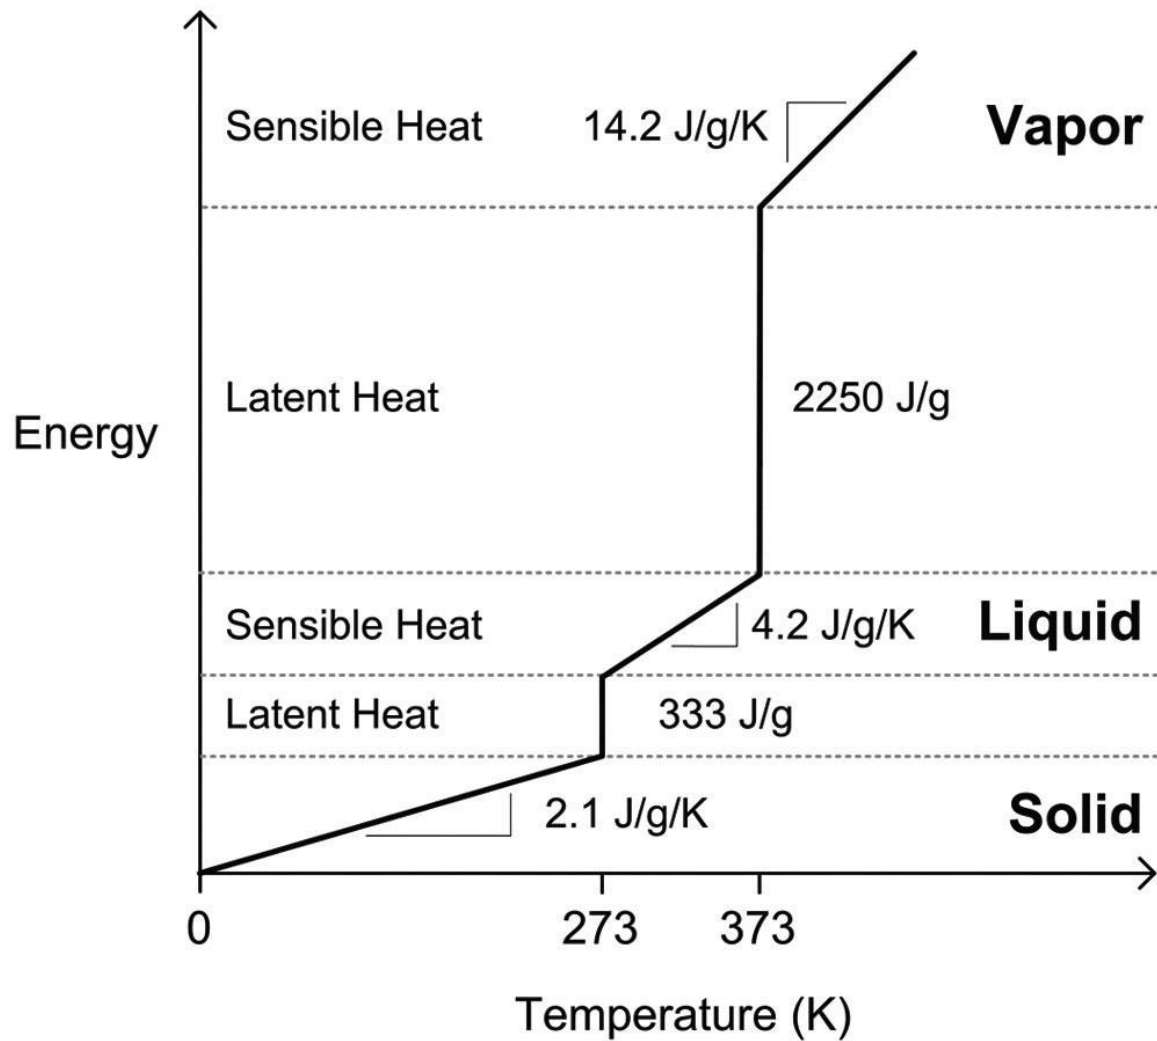


Simple linearized energy-temperature relation for water



From Straube & Burnett, 2005



The inside face of the exterior sheathing is the condensing surface of interest

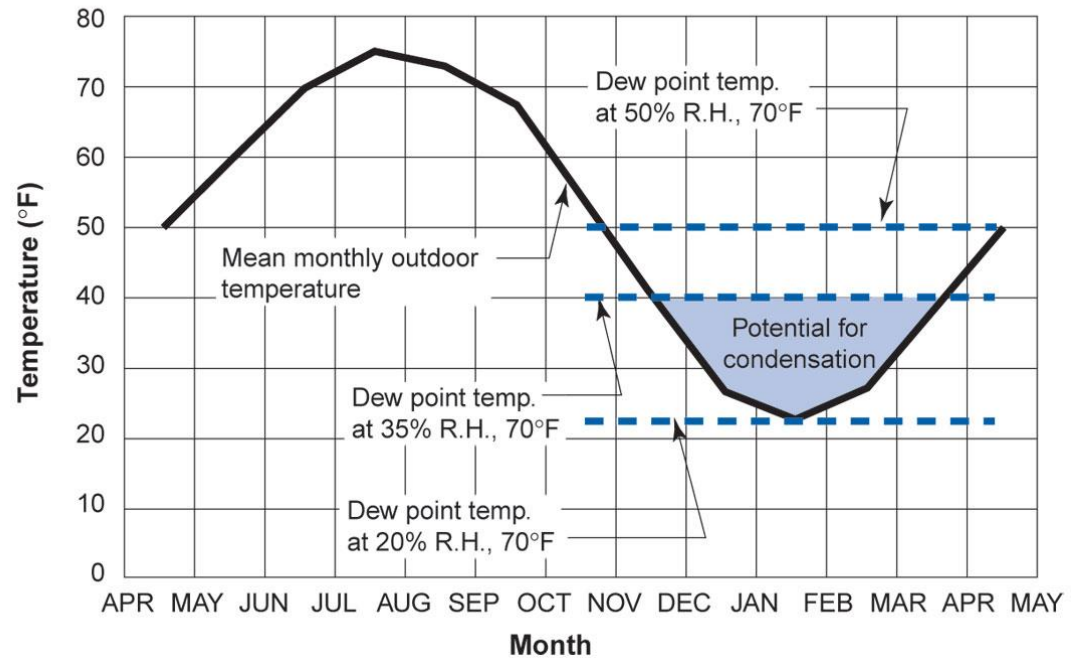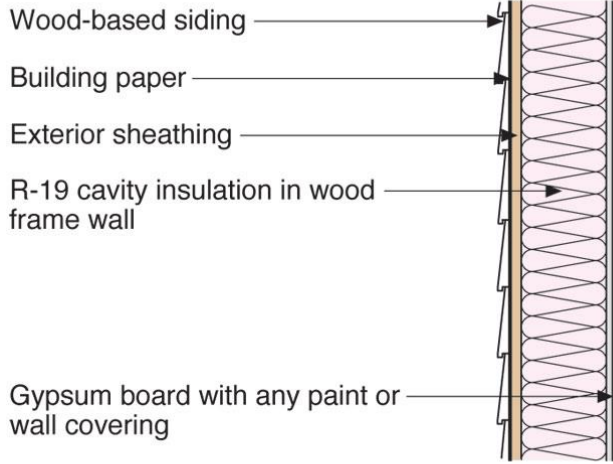

The inside face of the insulating sheathing is the condensing surface of interest

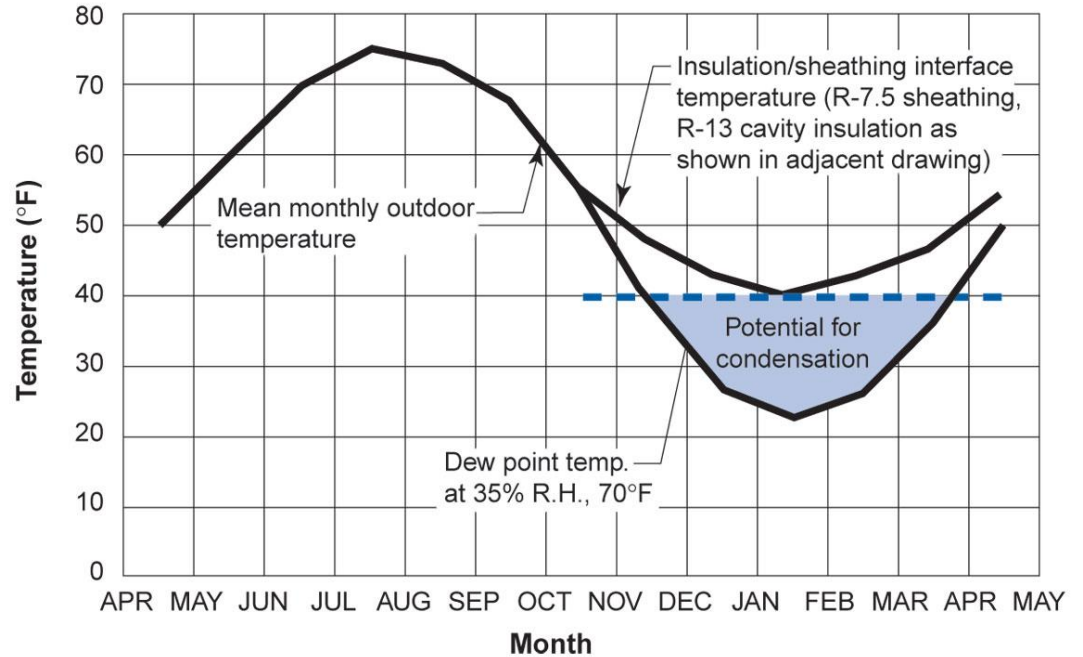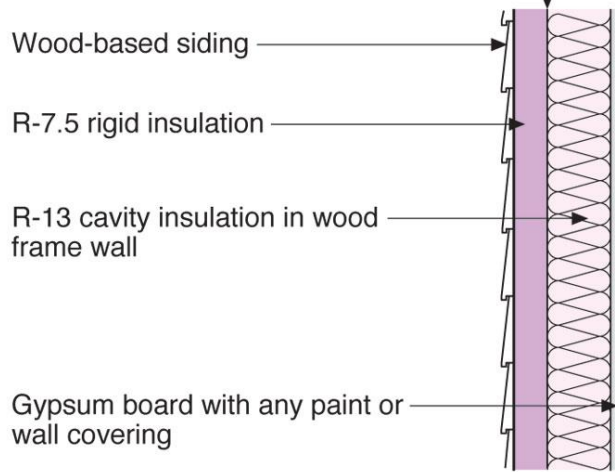





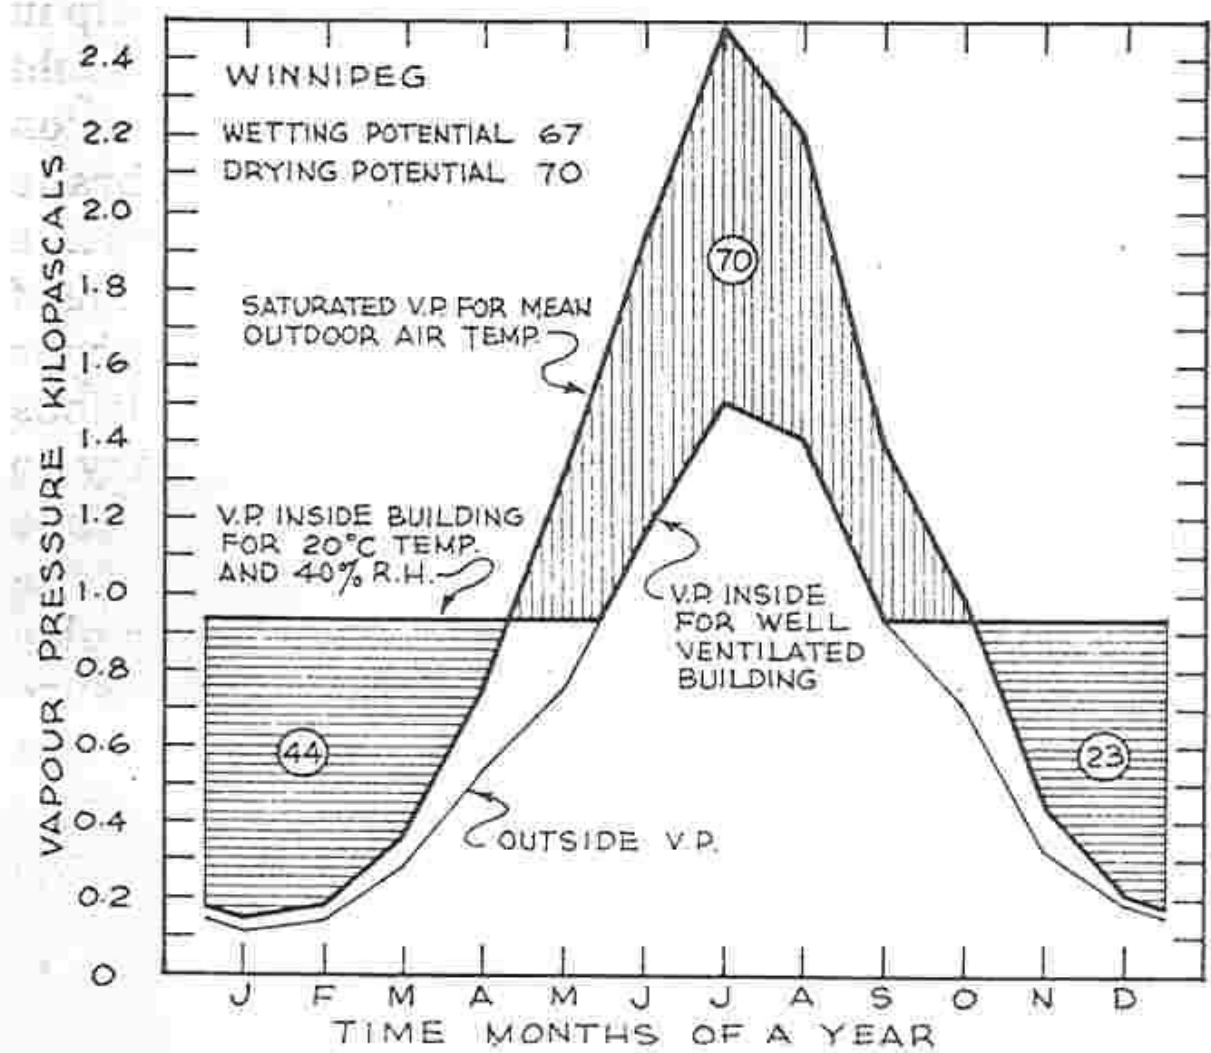



Figure 8-7. Outside vapour pressure, saturated vapour pressure and inside vapour pressure for Winnipeg.

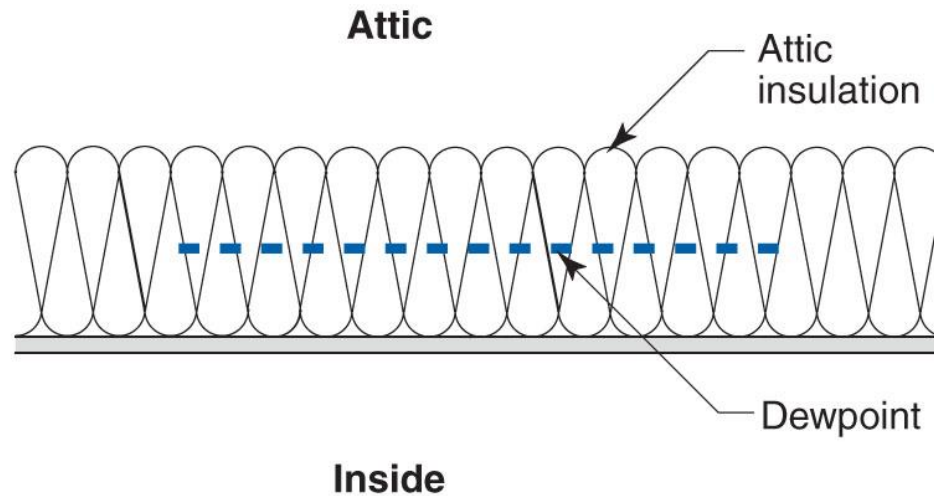


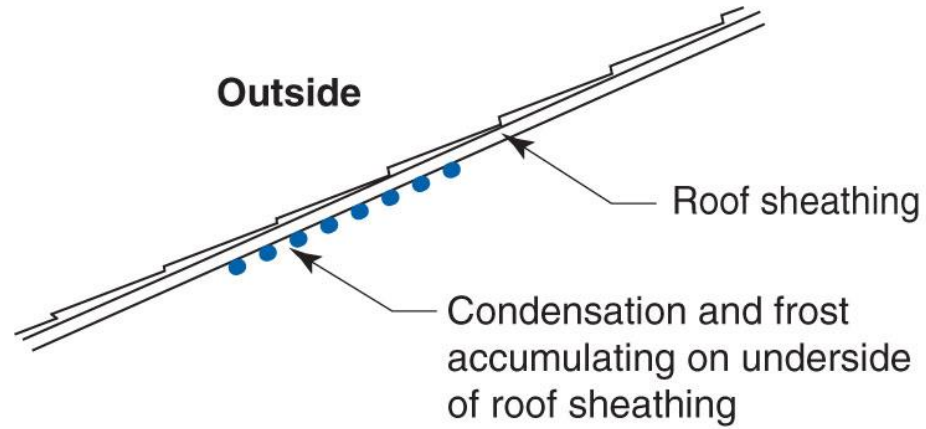

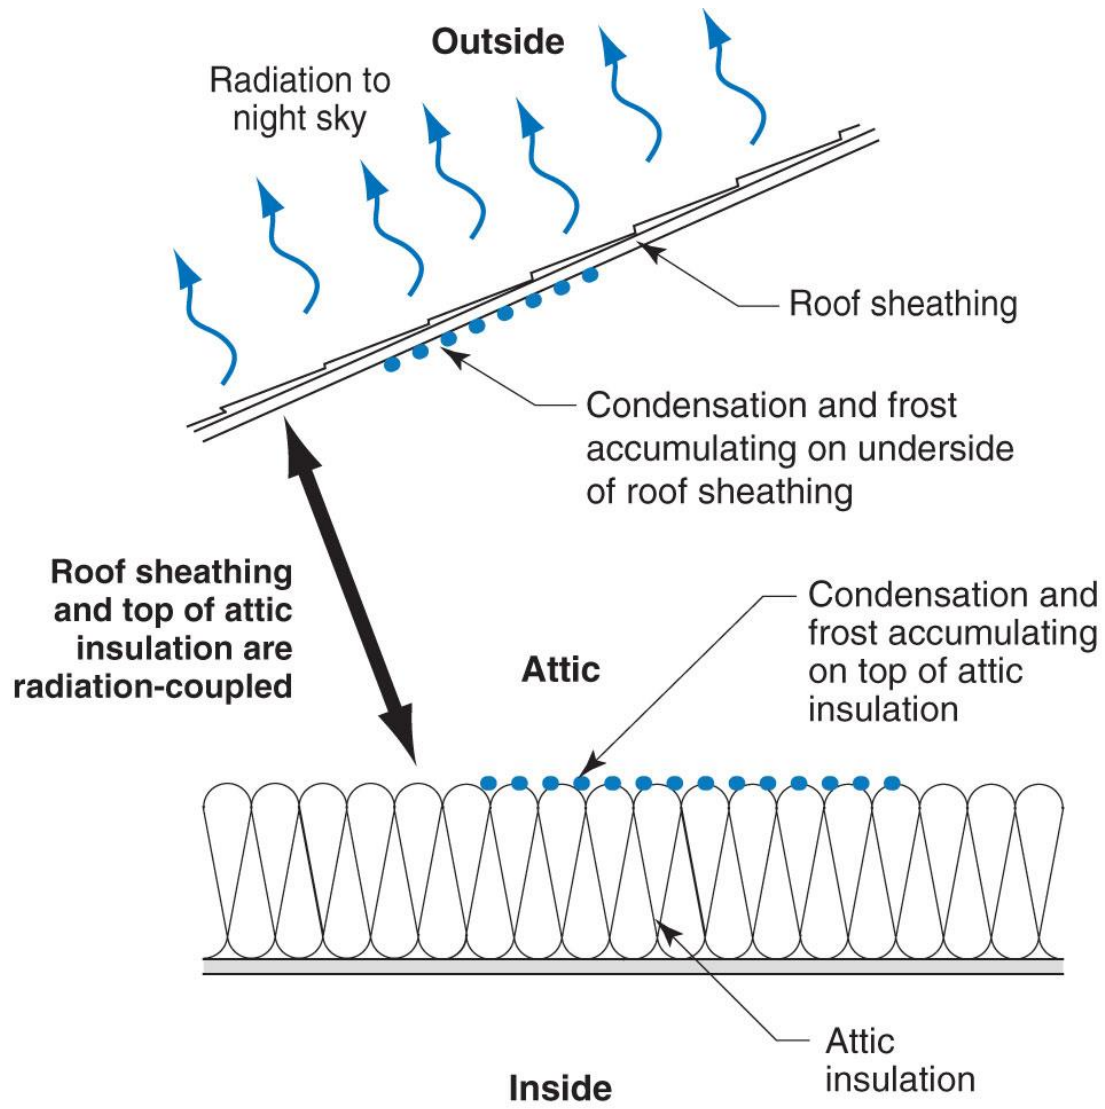

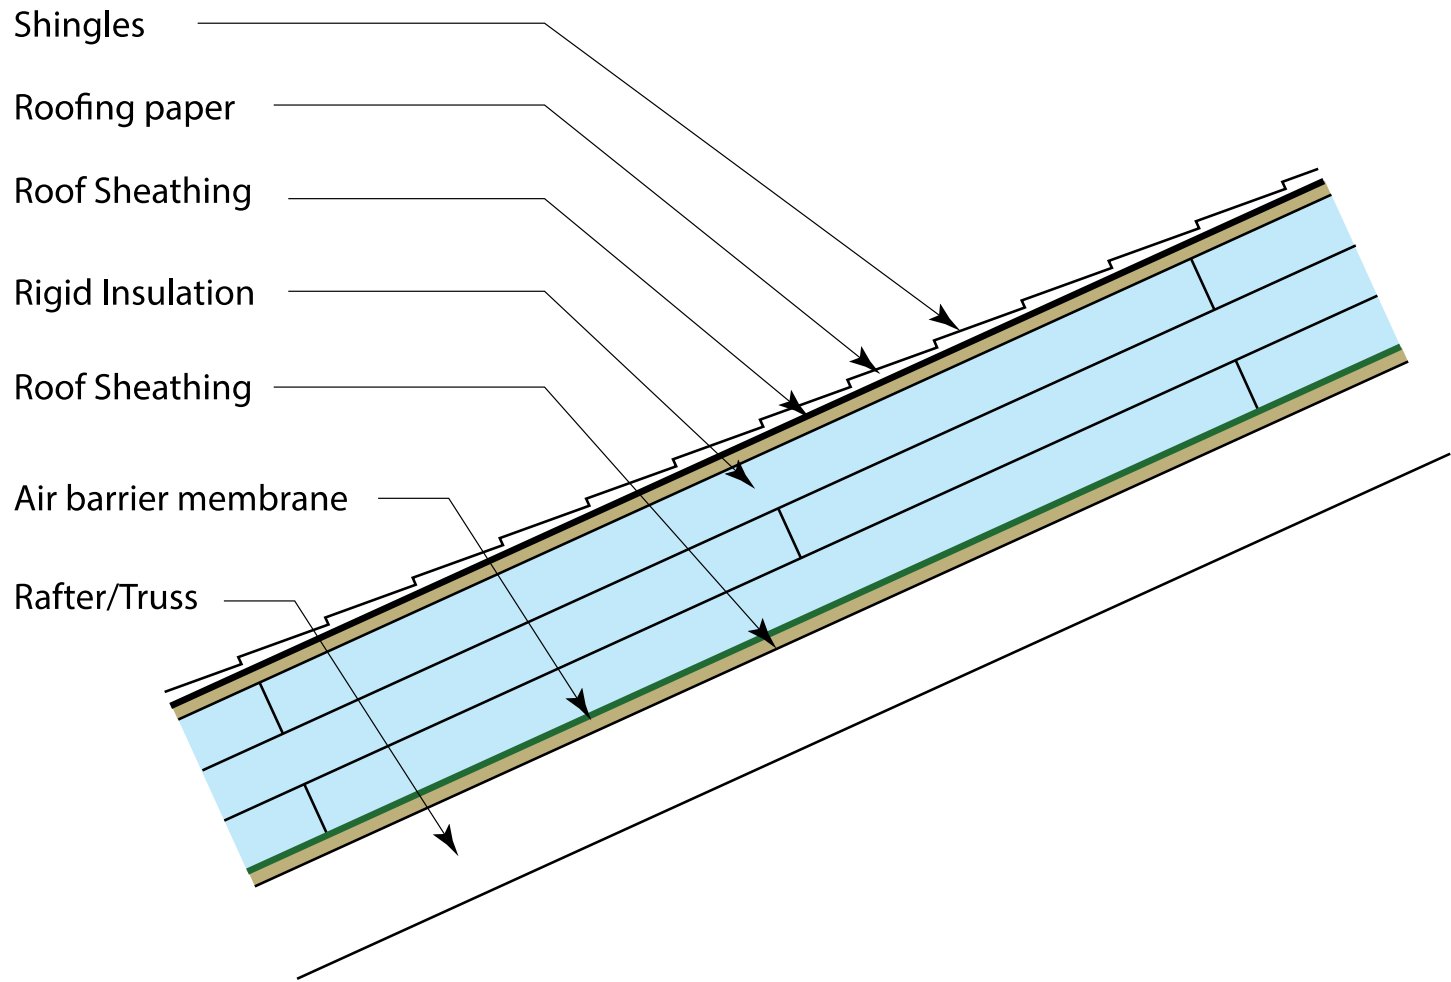

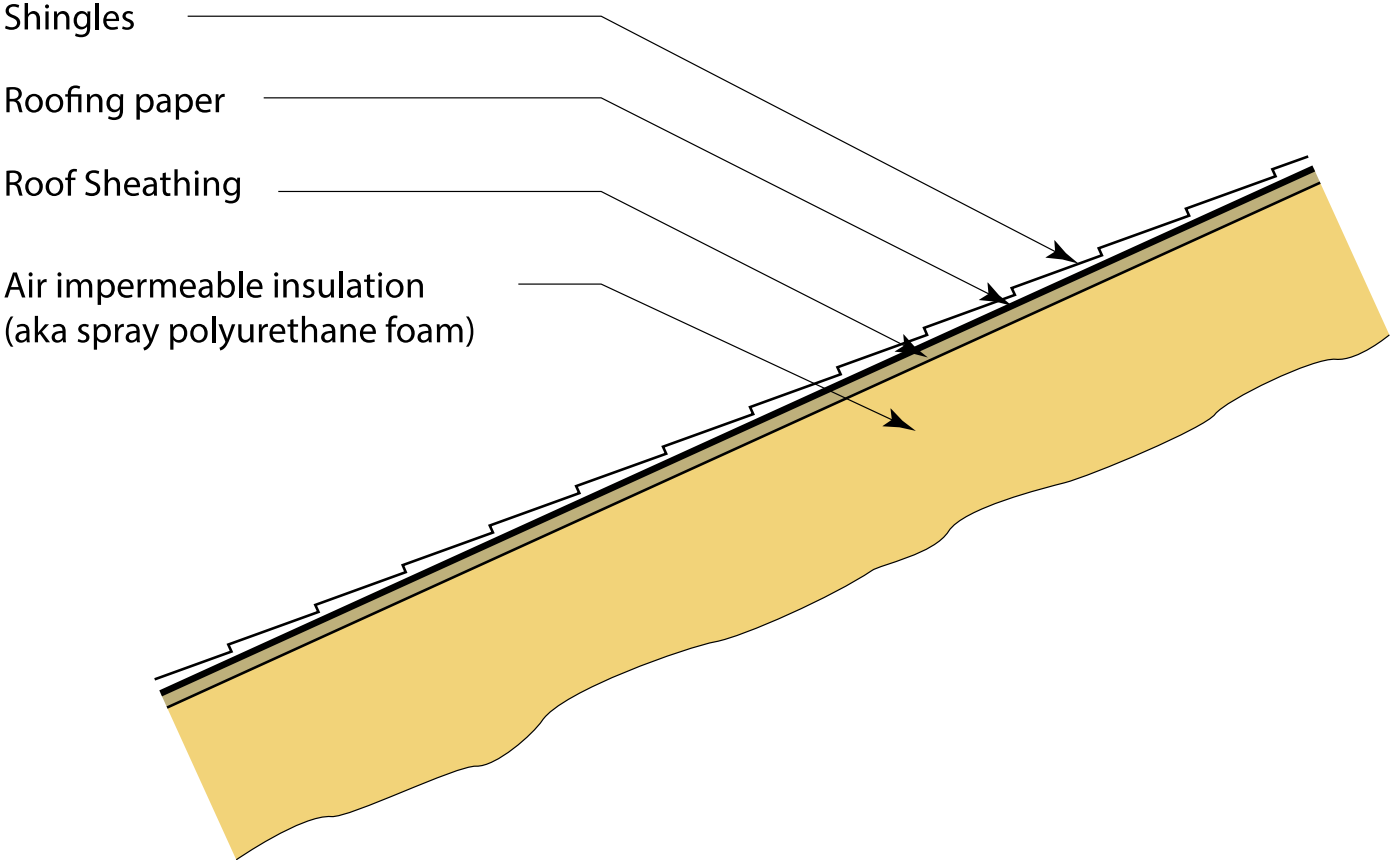

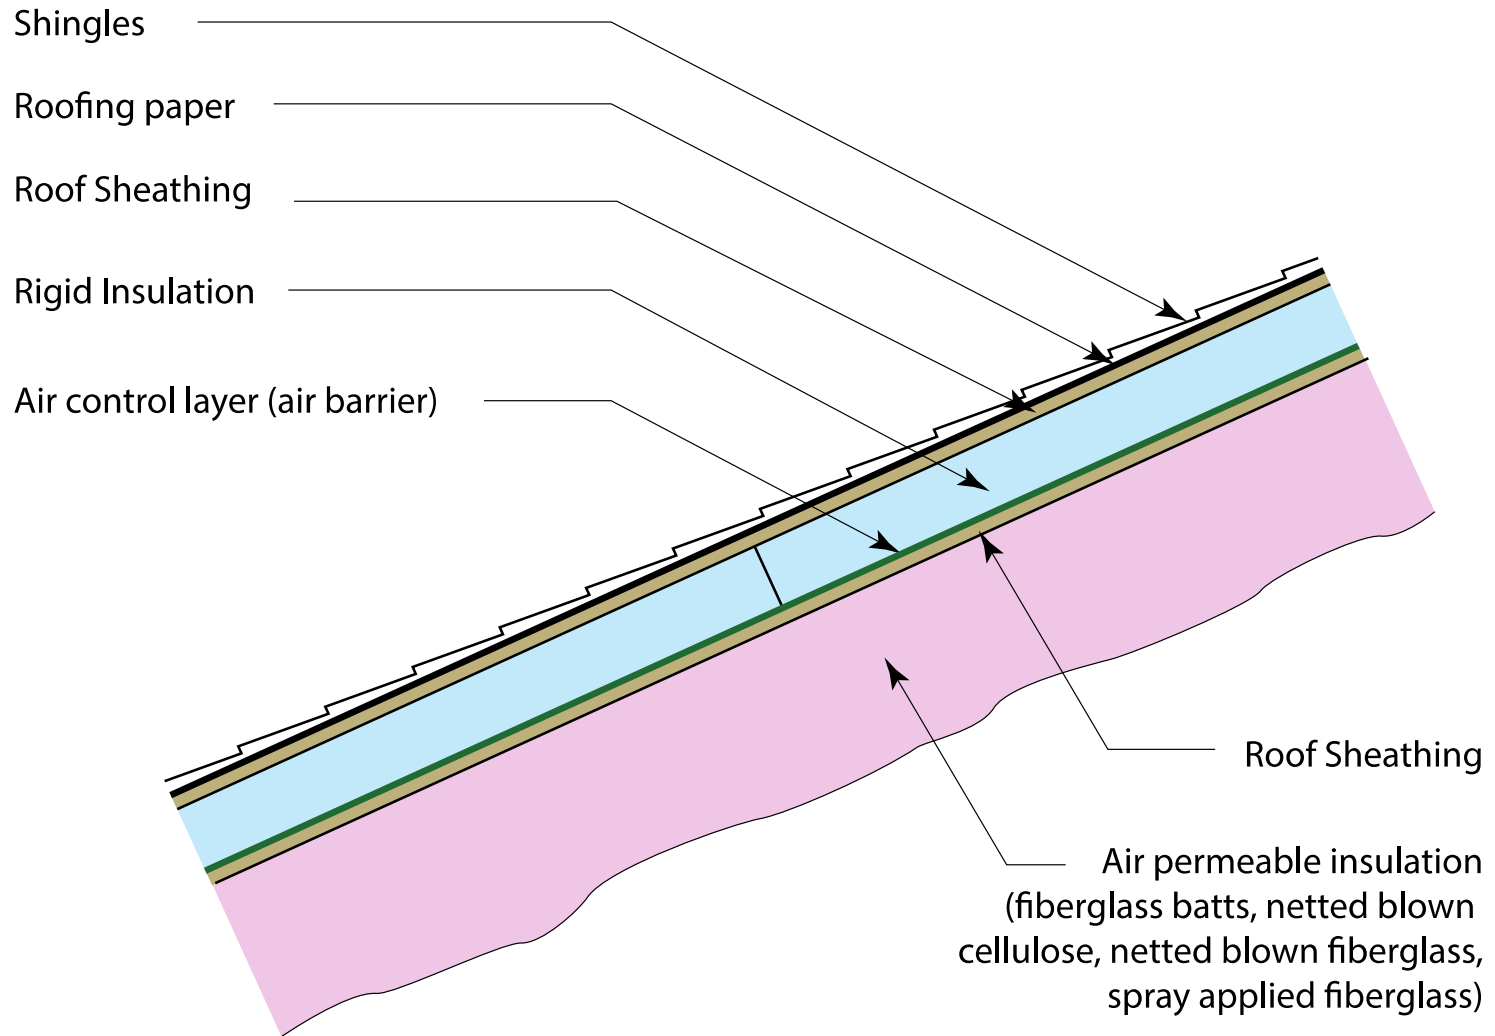


Shingles


Roofing paper

Roof Sheathing

Air impermeable insulation
(aka spray polyurethane foam)

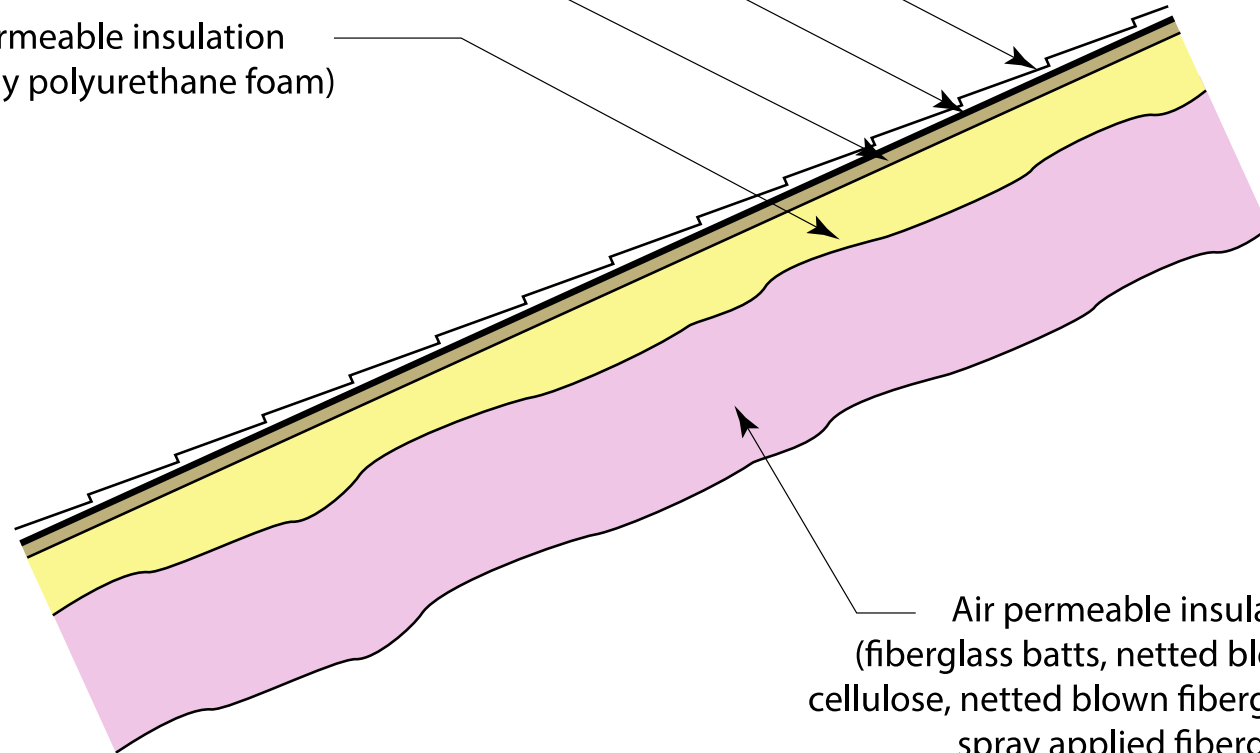


Air permeable insulation
(fiberglass batts, netted blown
cellulose, netted blown fiberglass,
spray applied fiberglass)

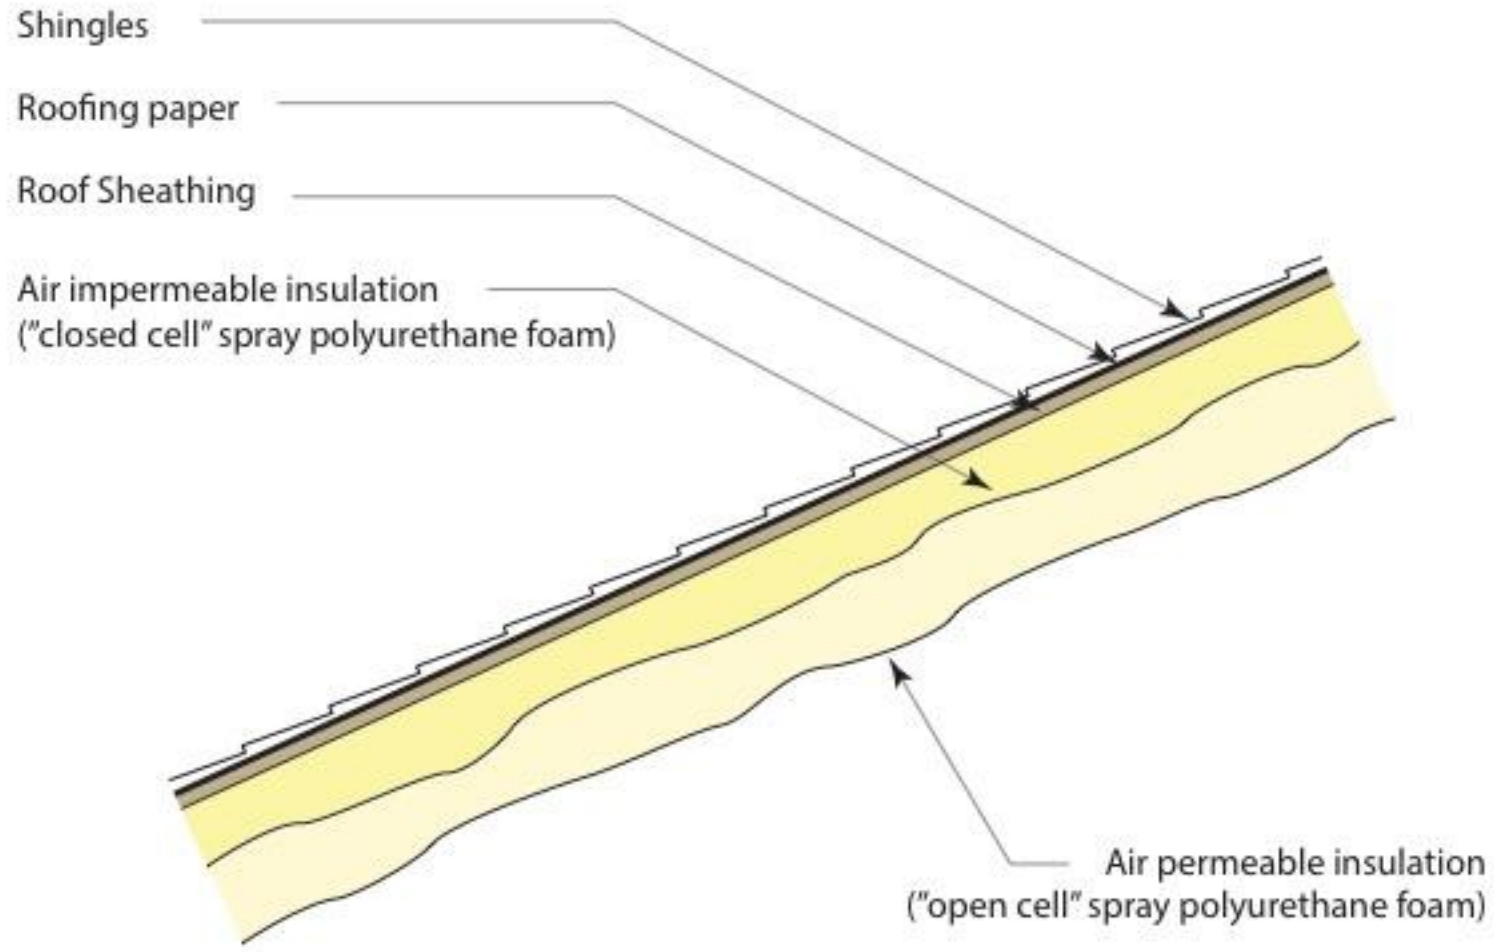



Insulation for Condensation Control*

Climate Zone	Rigid Board or Air Impermeable Insulation	Total Cavity Insulation	Total Wall Assembly Insulation	Ratio of Rigid Board Insulation or Air Impermeable R-Value to Total Insulation R-Value
4C	R-2.5	R-13	R-15.5	15%
	R-3.75	R-20	R-23.75	15%
5	R-5	R-13	R-18	30%
	R-7.5	R-20	R-27.5	30%
6	R-7.5	R-13	R-20.5	35%
	R-11.25	R-20	R-31.25	35%
7	R-10	R-13	R-28	45%
	R-15	R-20	R-35	45%
8	R-15	R-13	R-28	50%
	R-20	R-20	R-40	50%

*Adapted from Table R 702.1 2015 International Residential Code

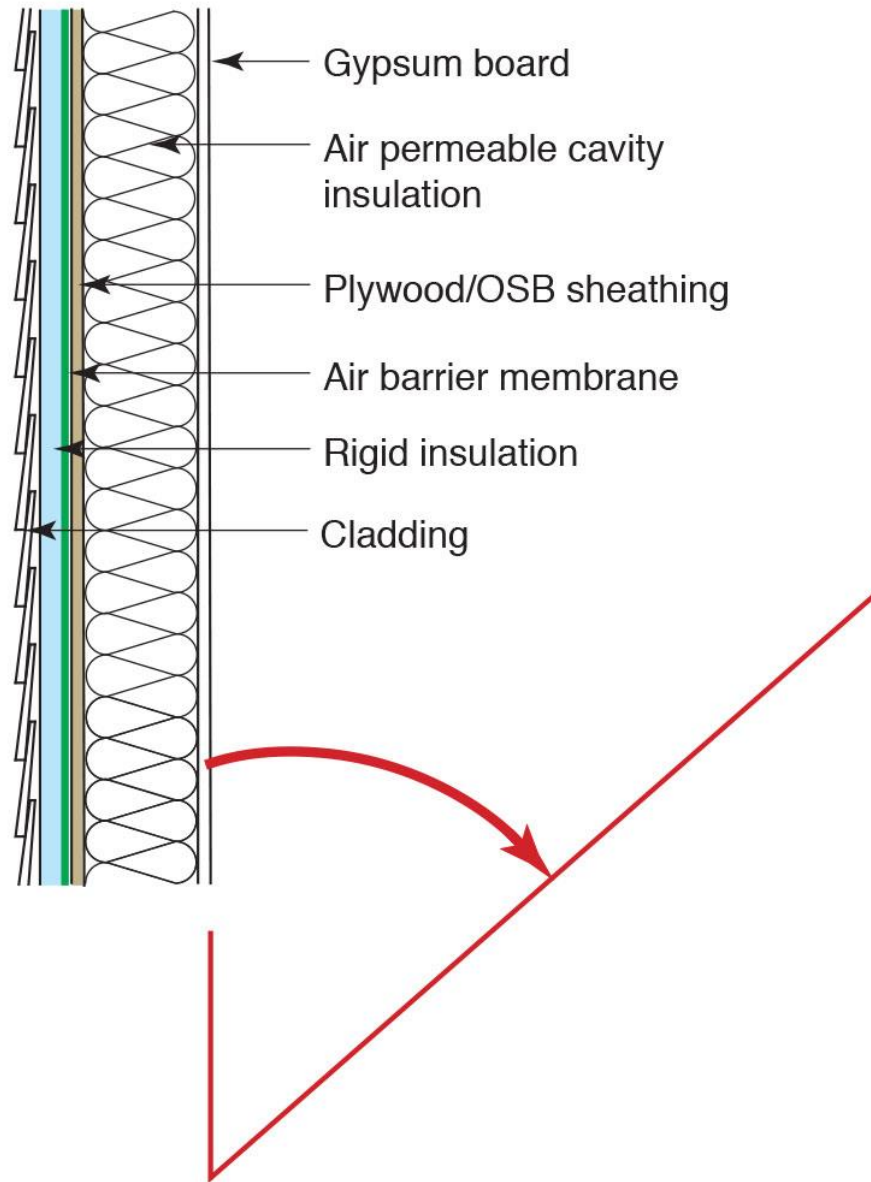

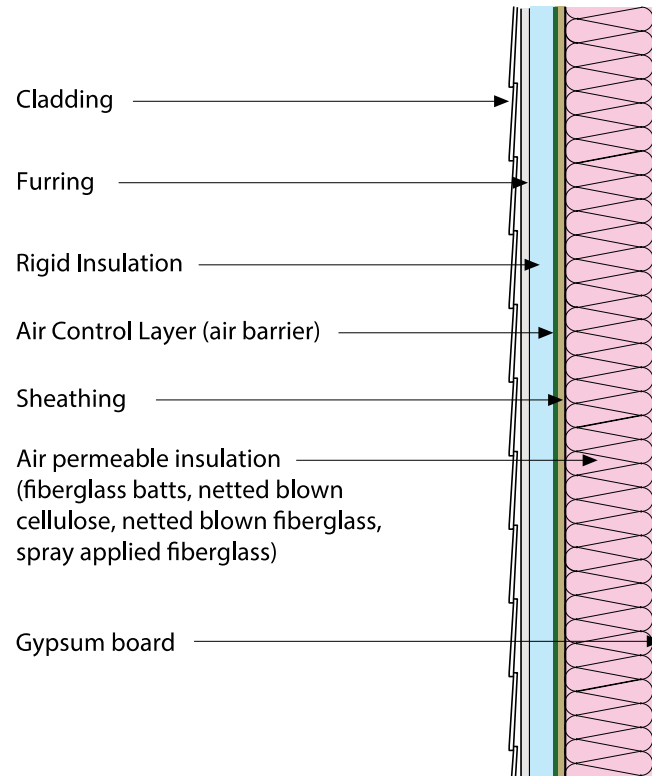

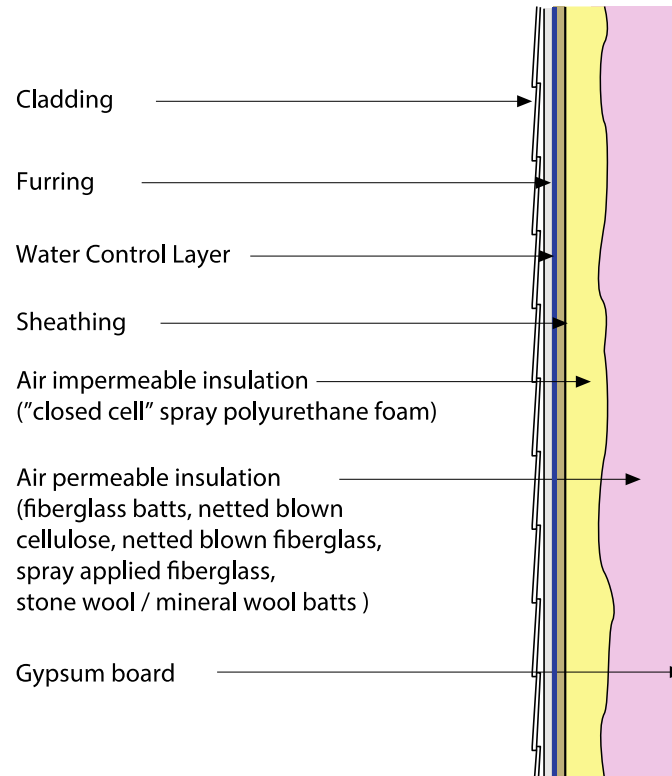



Insulation for Condensation Control*

Climate Zone	Rigid Board or Air Impermeable Insulation	Code Required R-Value	Ratio of Rigid Board Insulation or Air Impermeable R-Value to Total Insulation R-Value
1,2,3	R-5	R-38	10%
4C	R-10	R-49	20%
4A, 4B	R-15	R-49	30%
5	R-20	R-49	40%
6	R-25	R-49	50%
7	R-30	R-49	60%
8	R-35	R-49	70%

*Adapted from Table R 806.5 2015 International Residential Code

Table 1

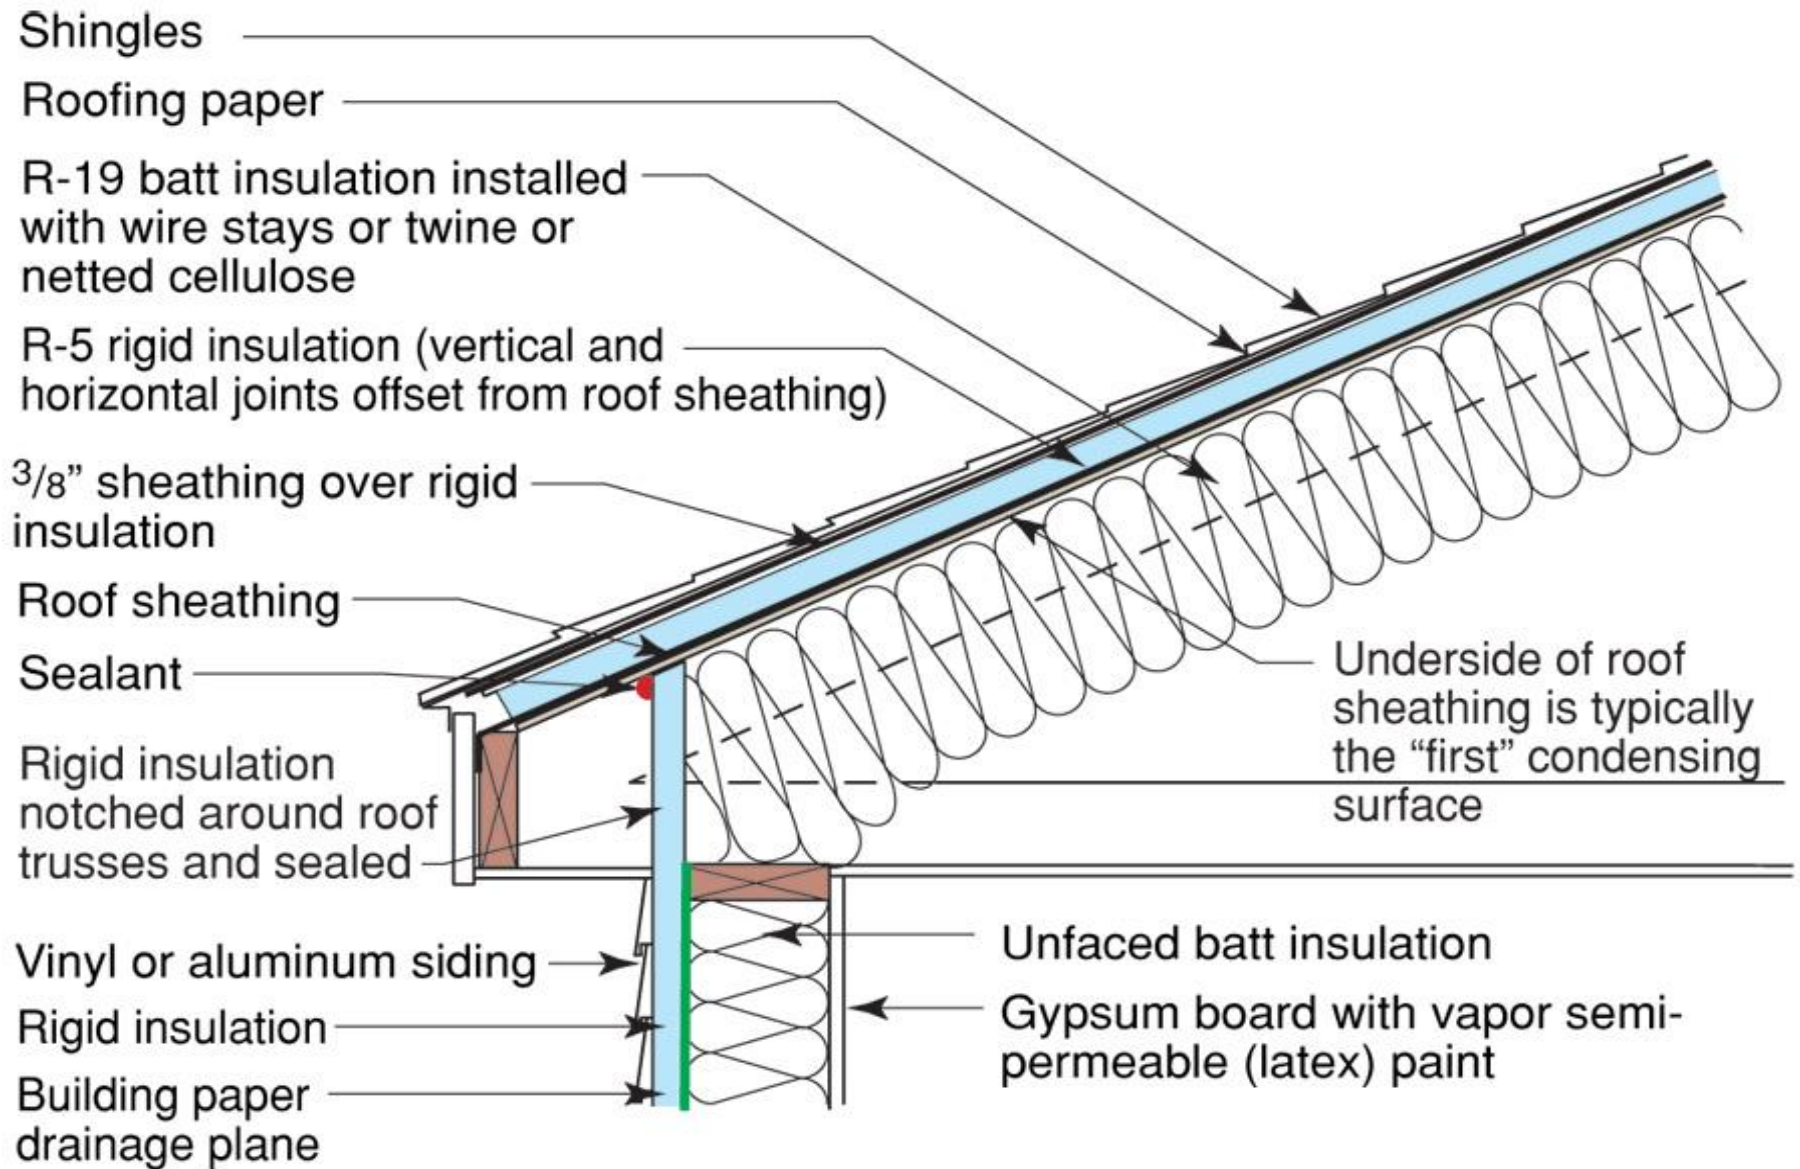


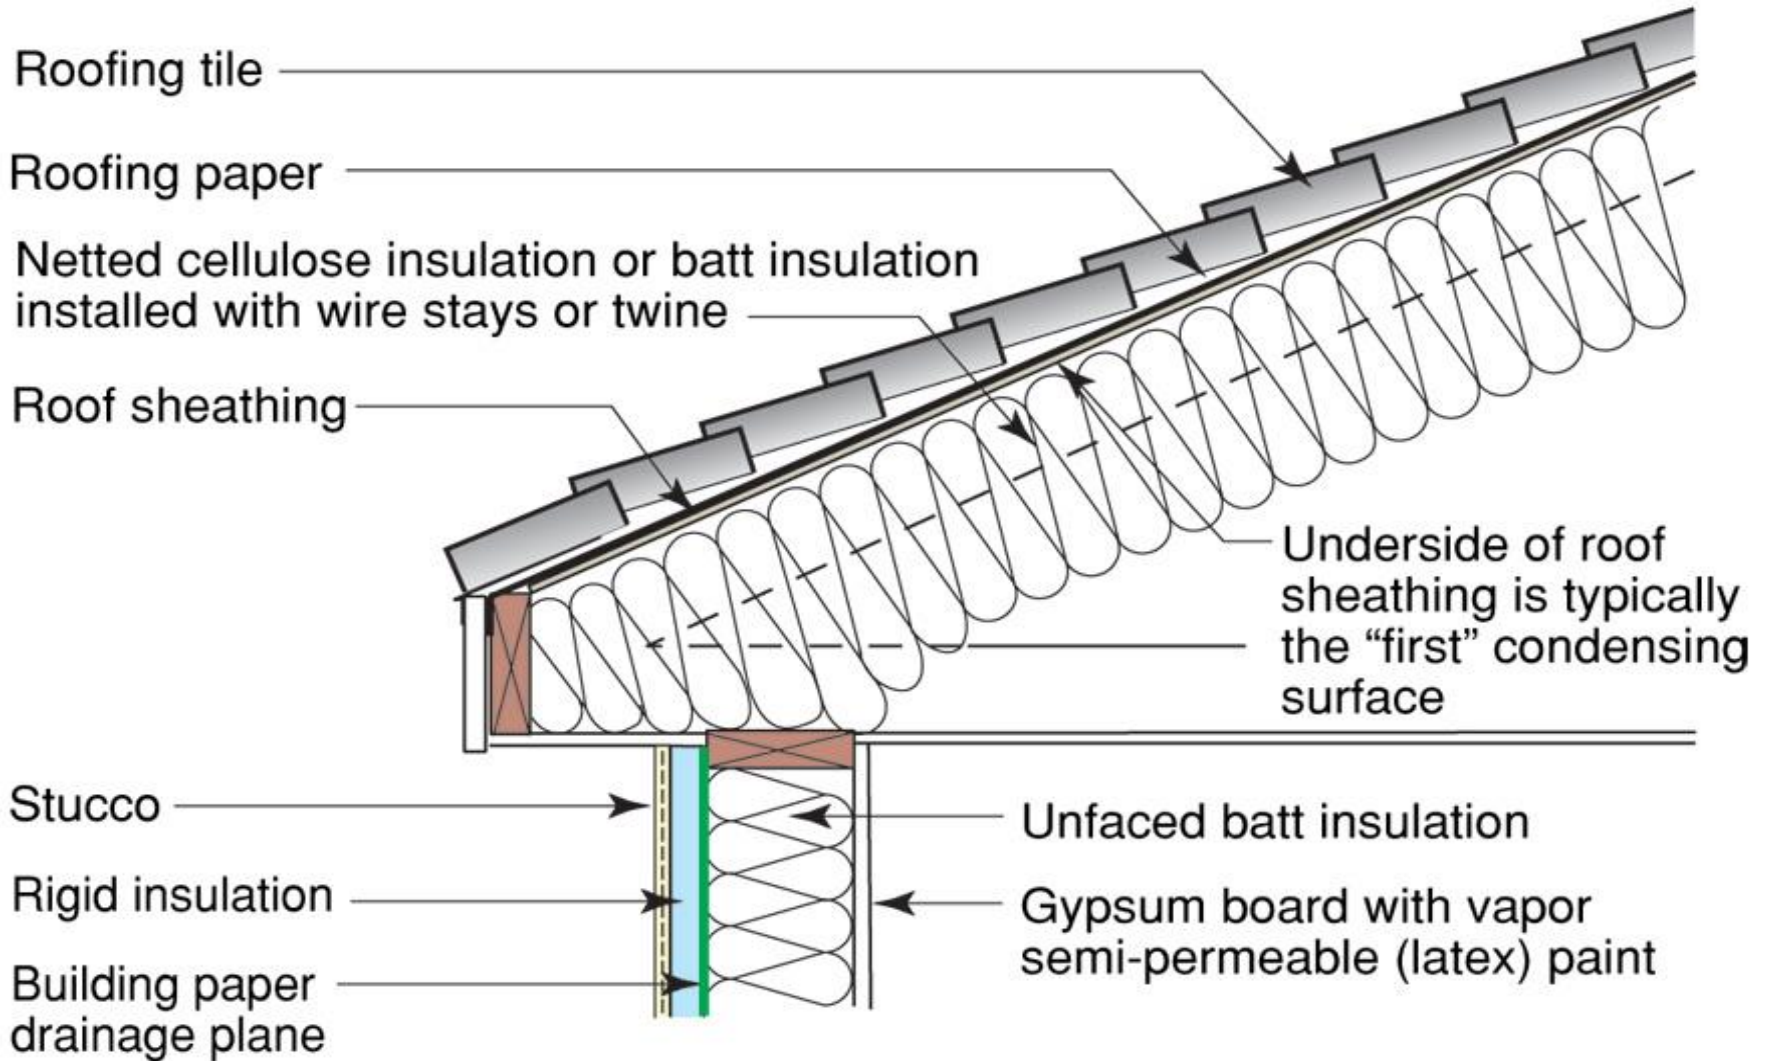







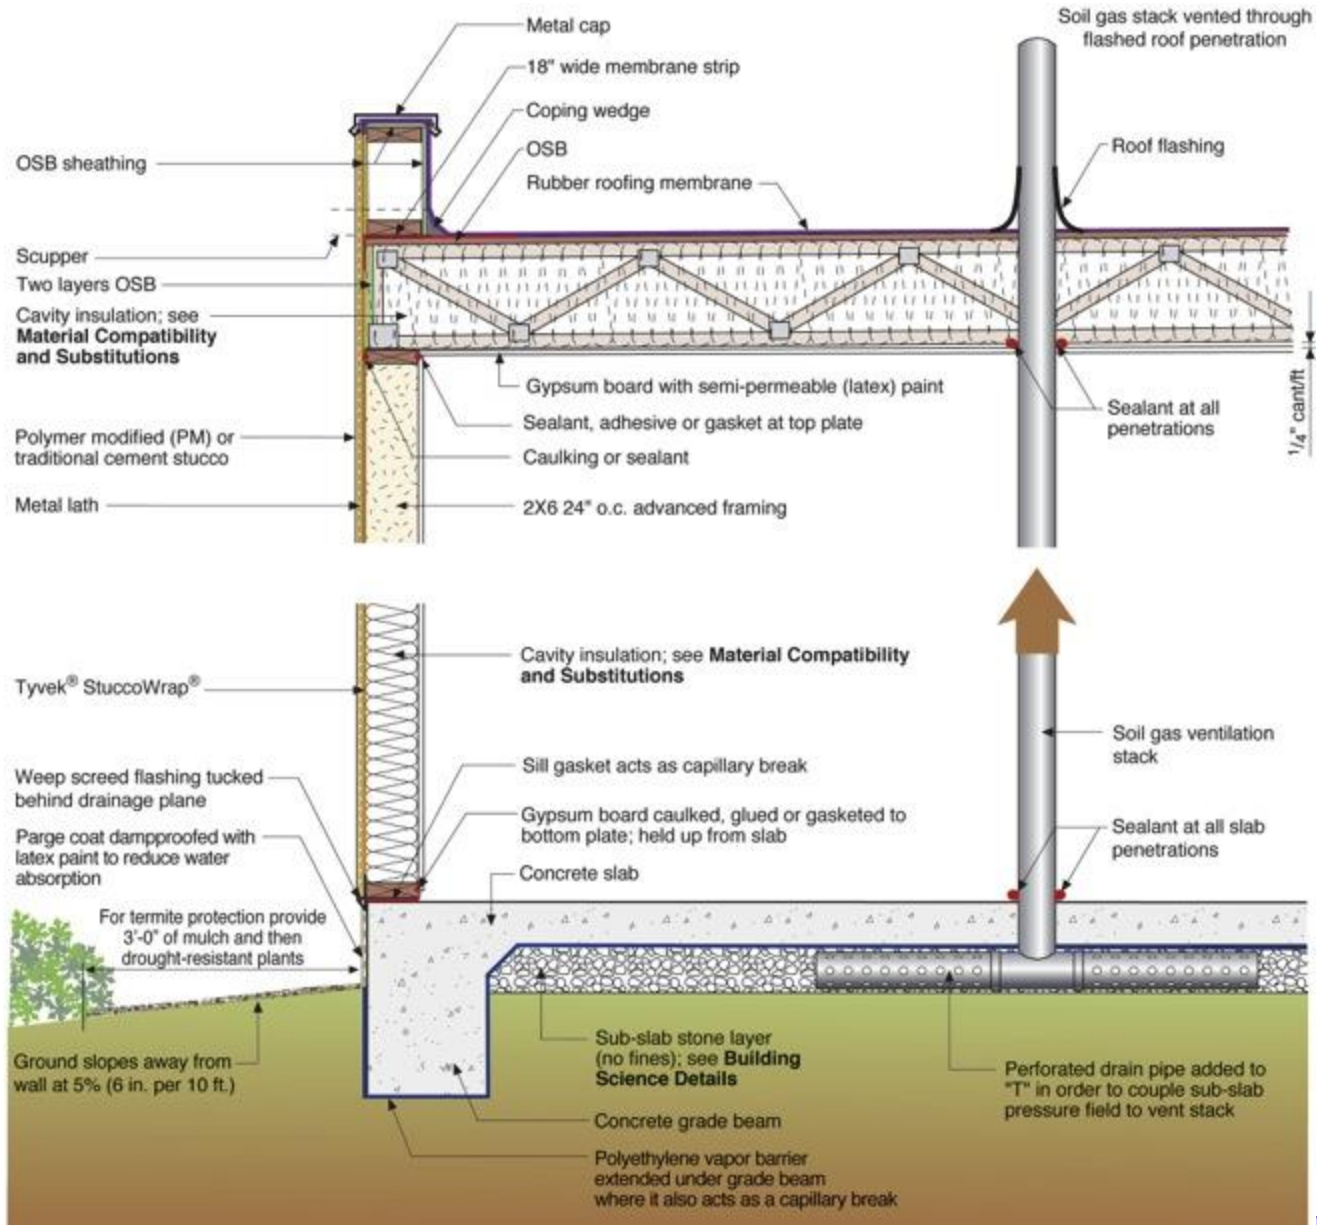




Truss Uplift








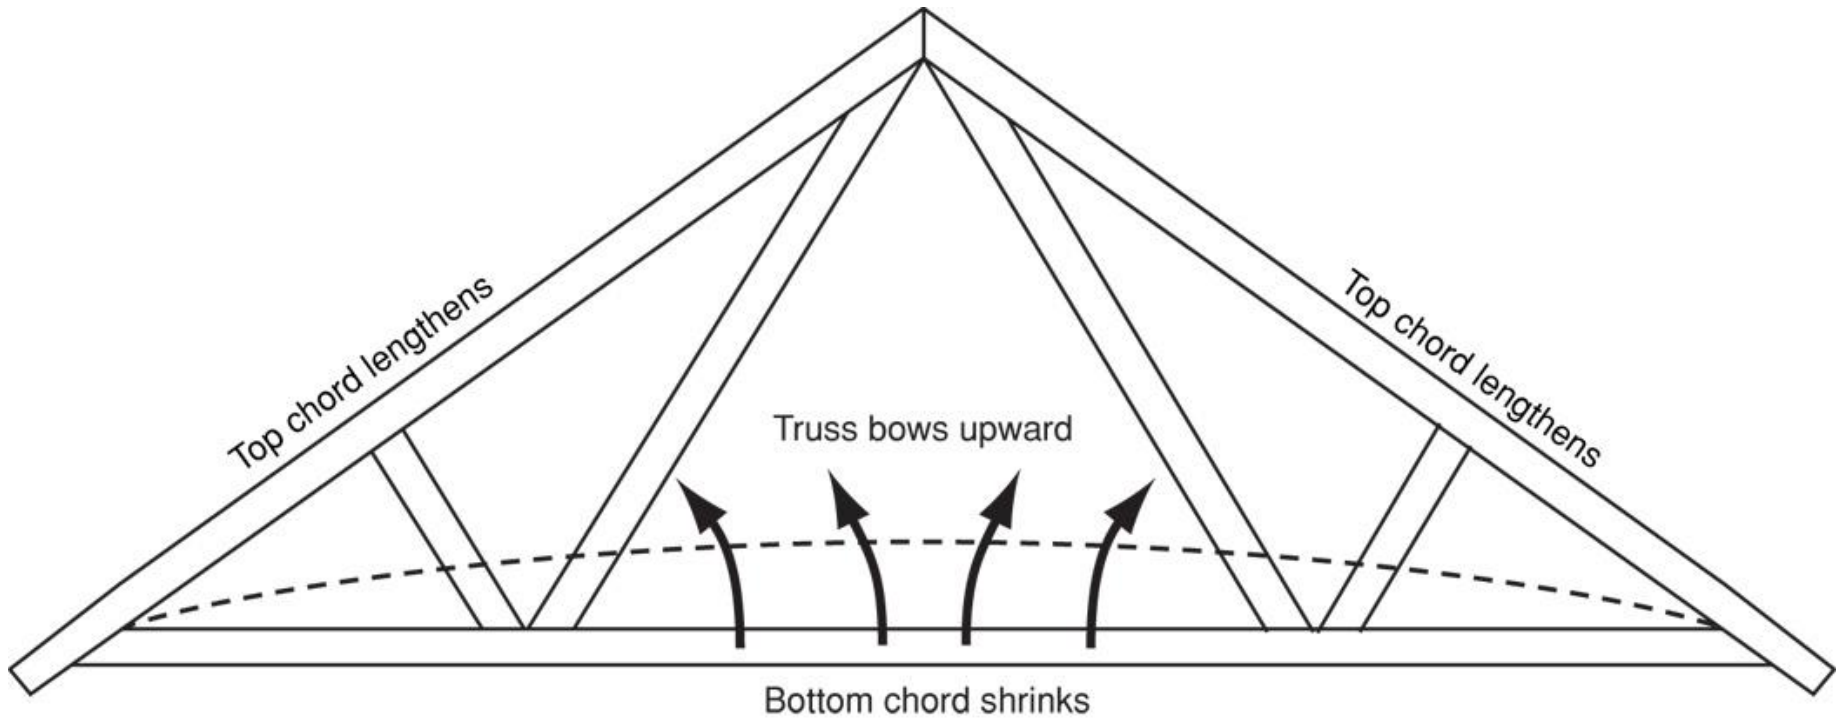


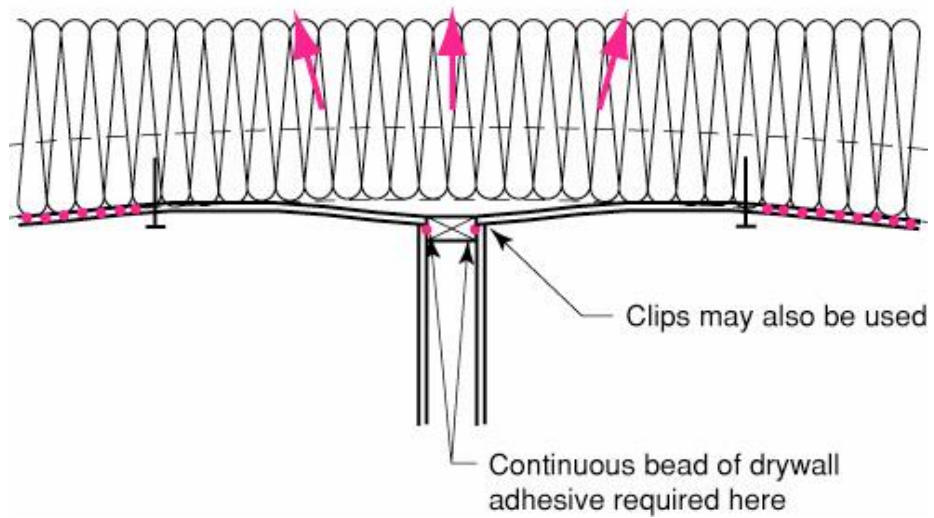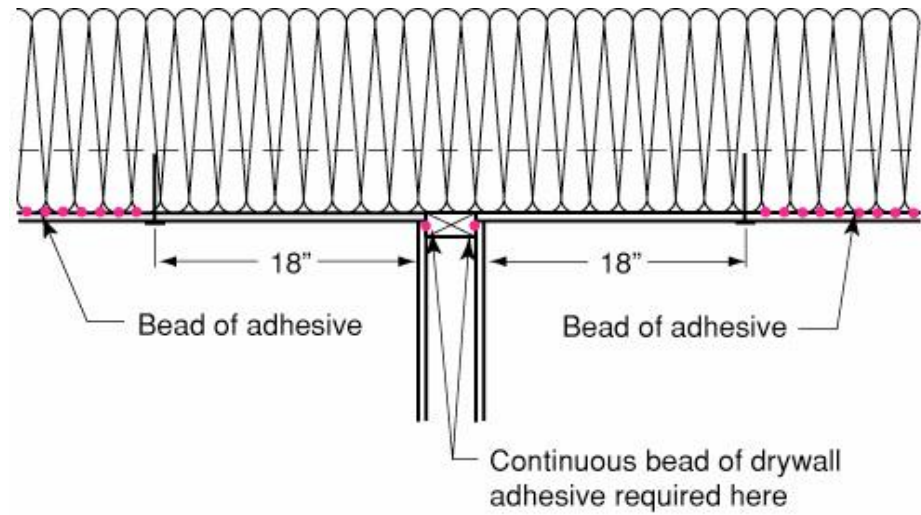


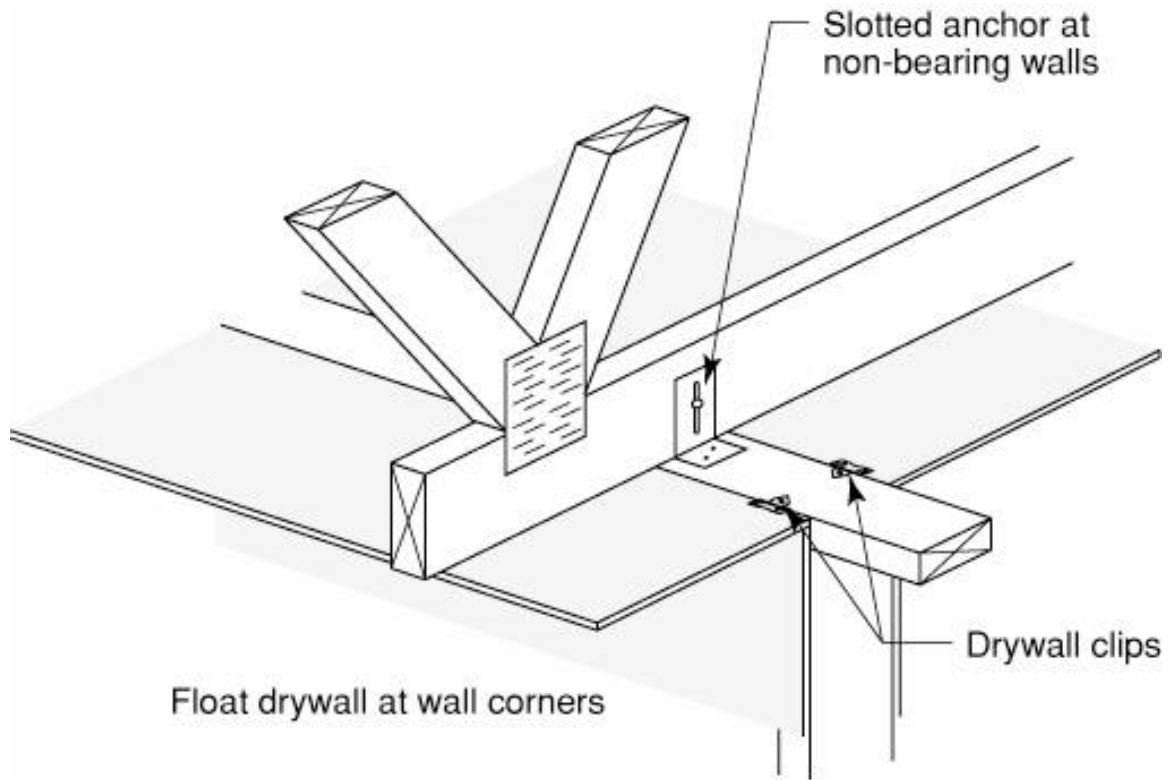








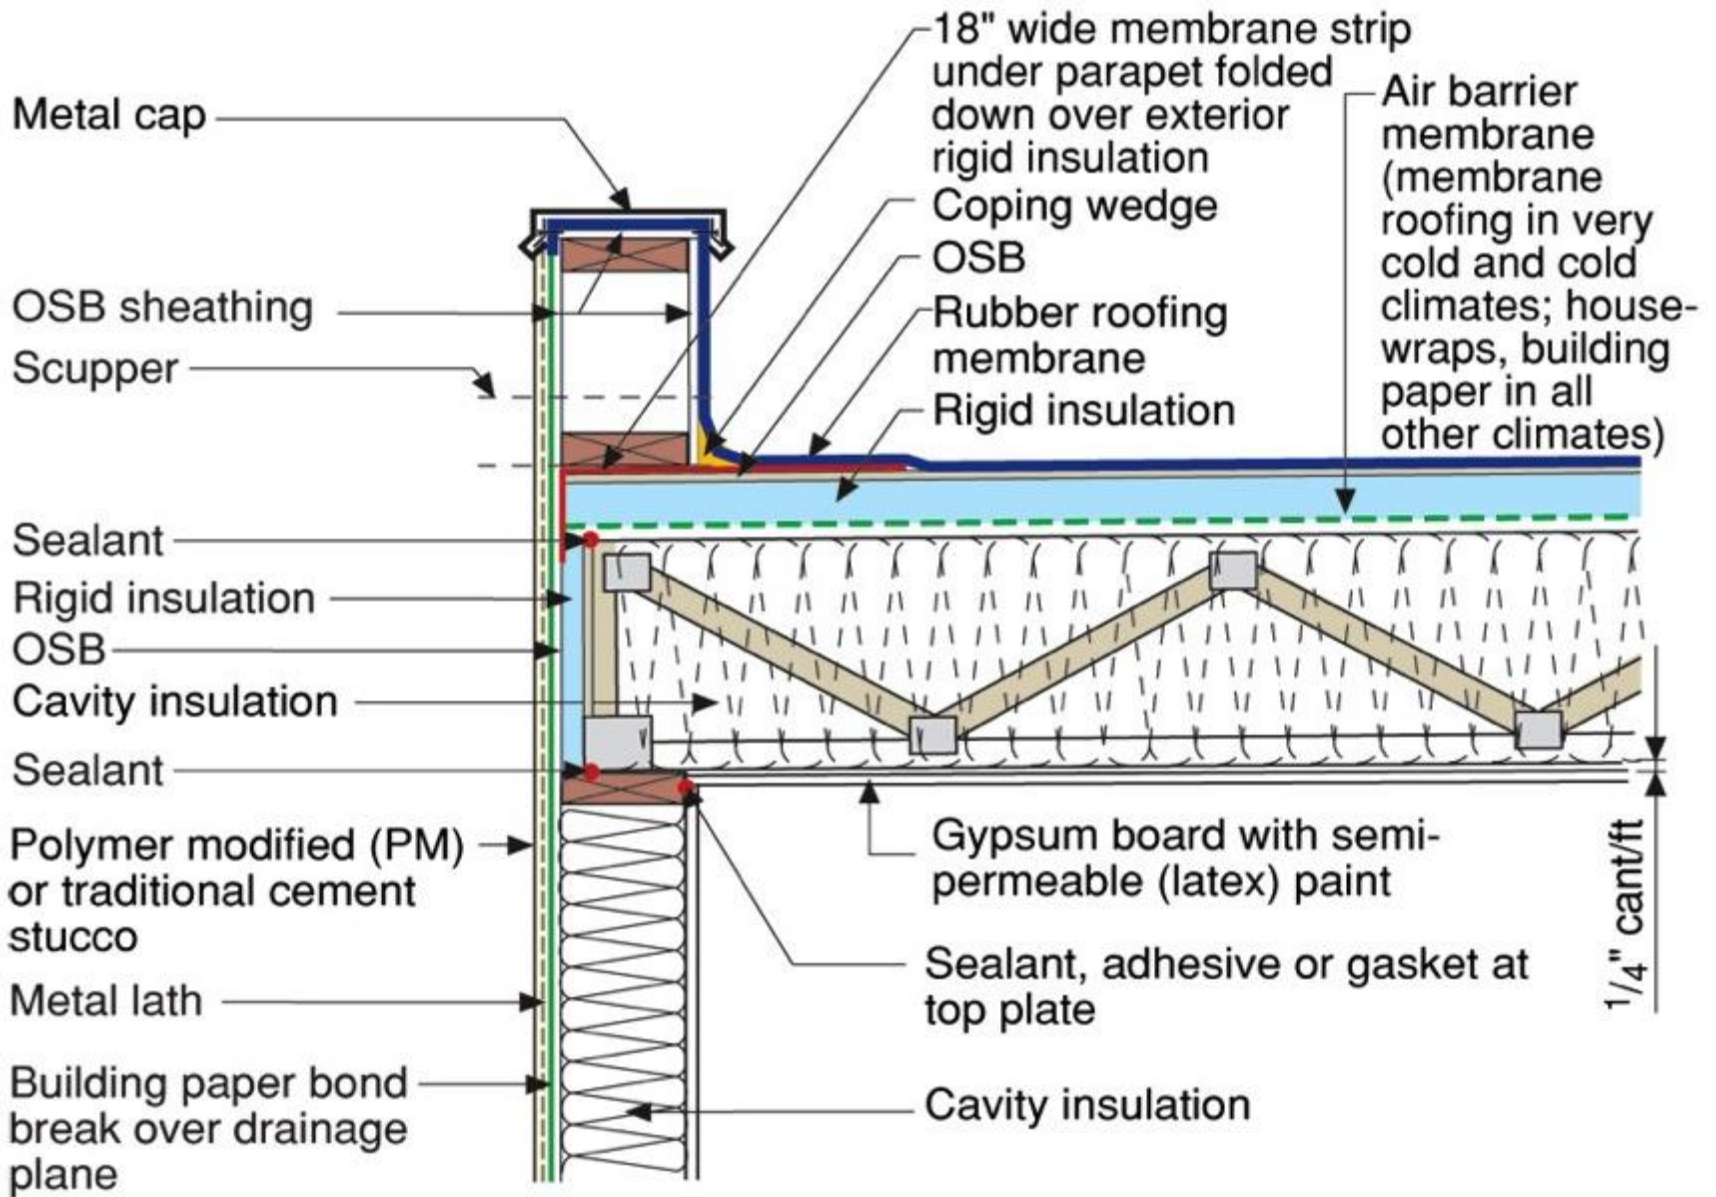

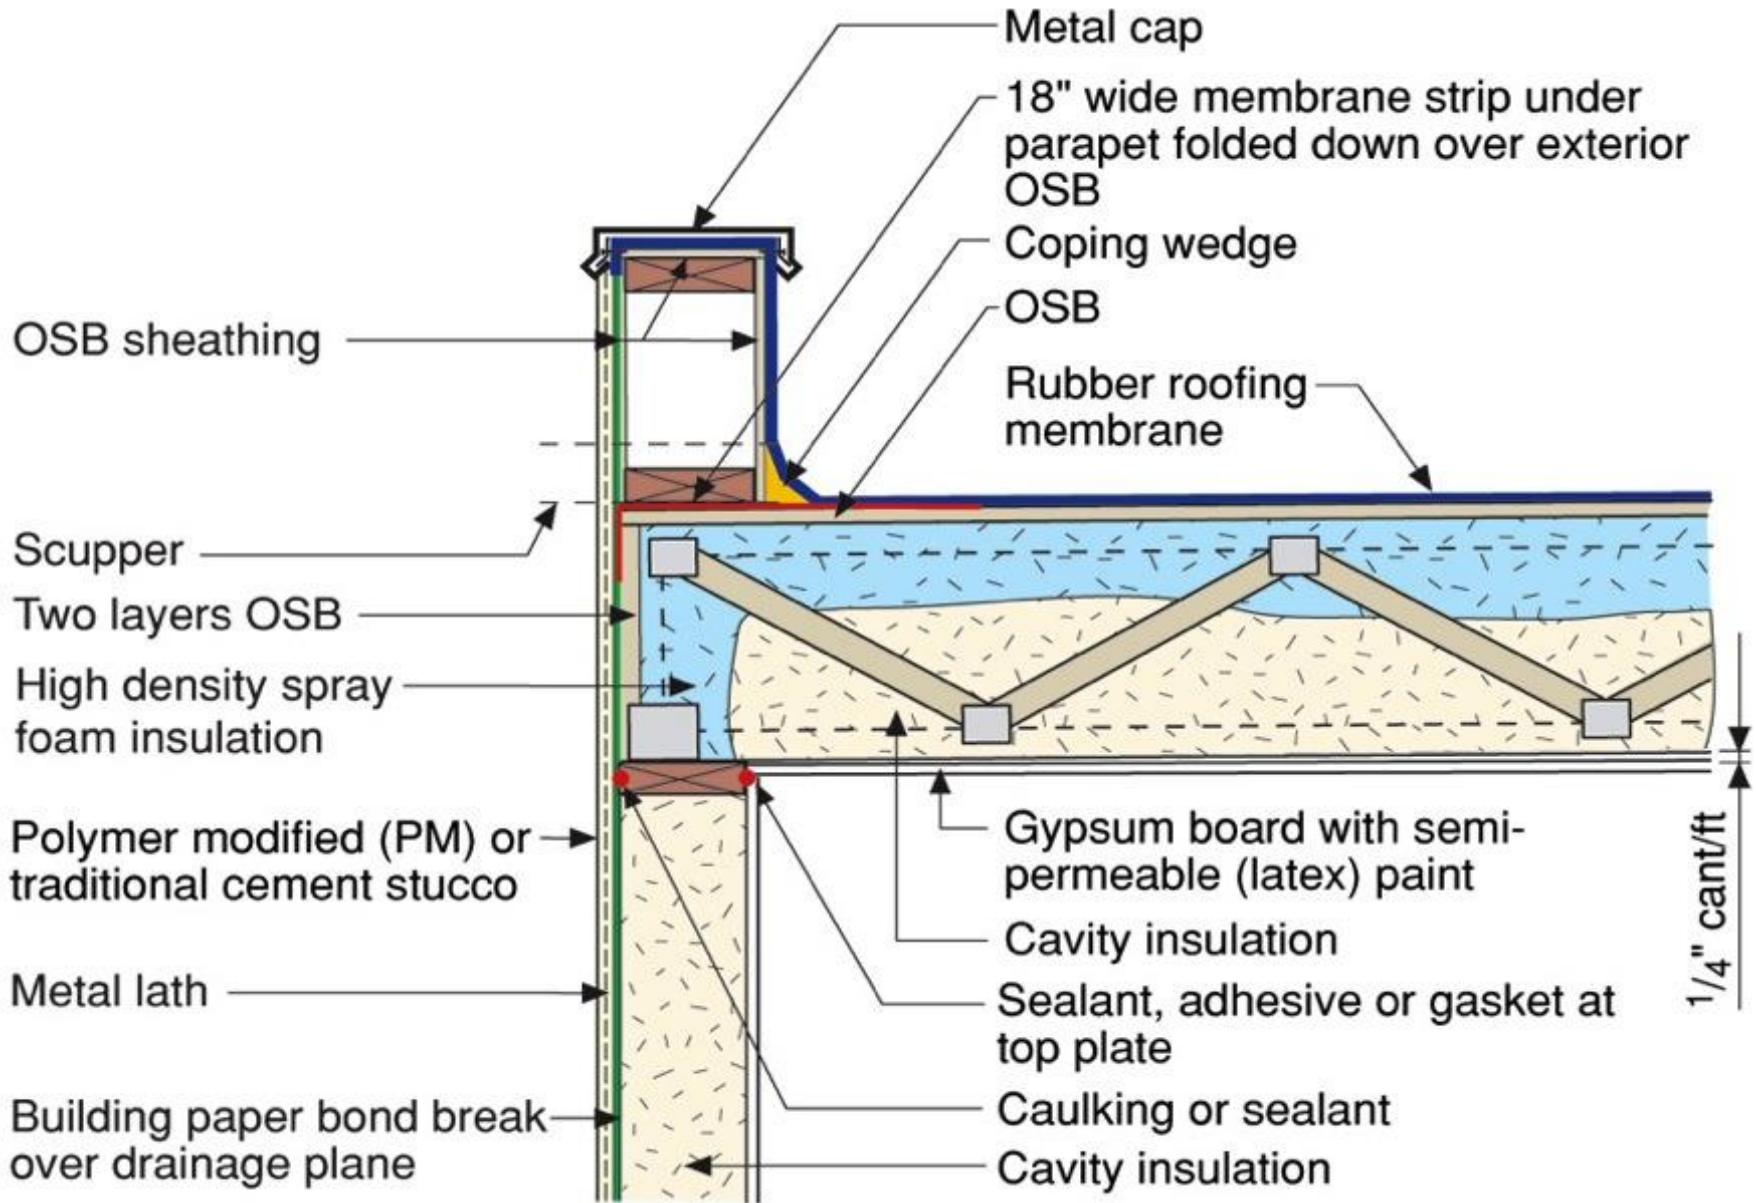

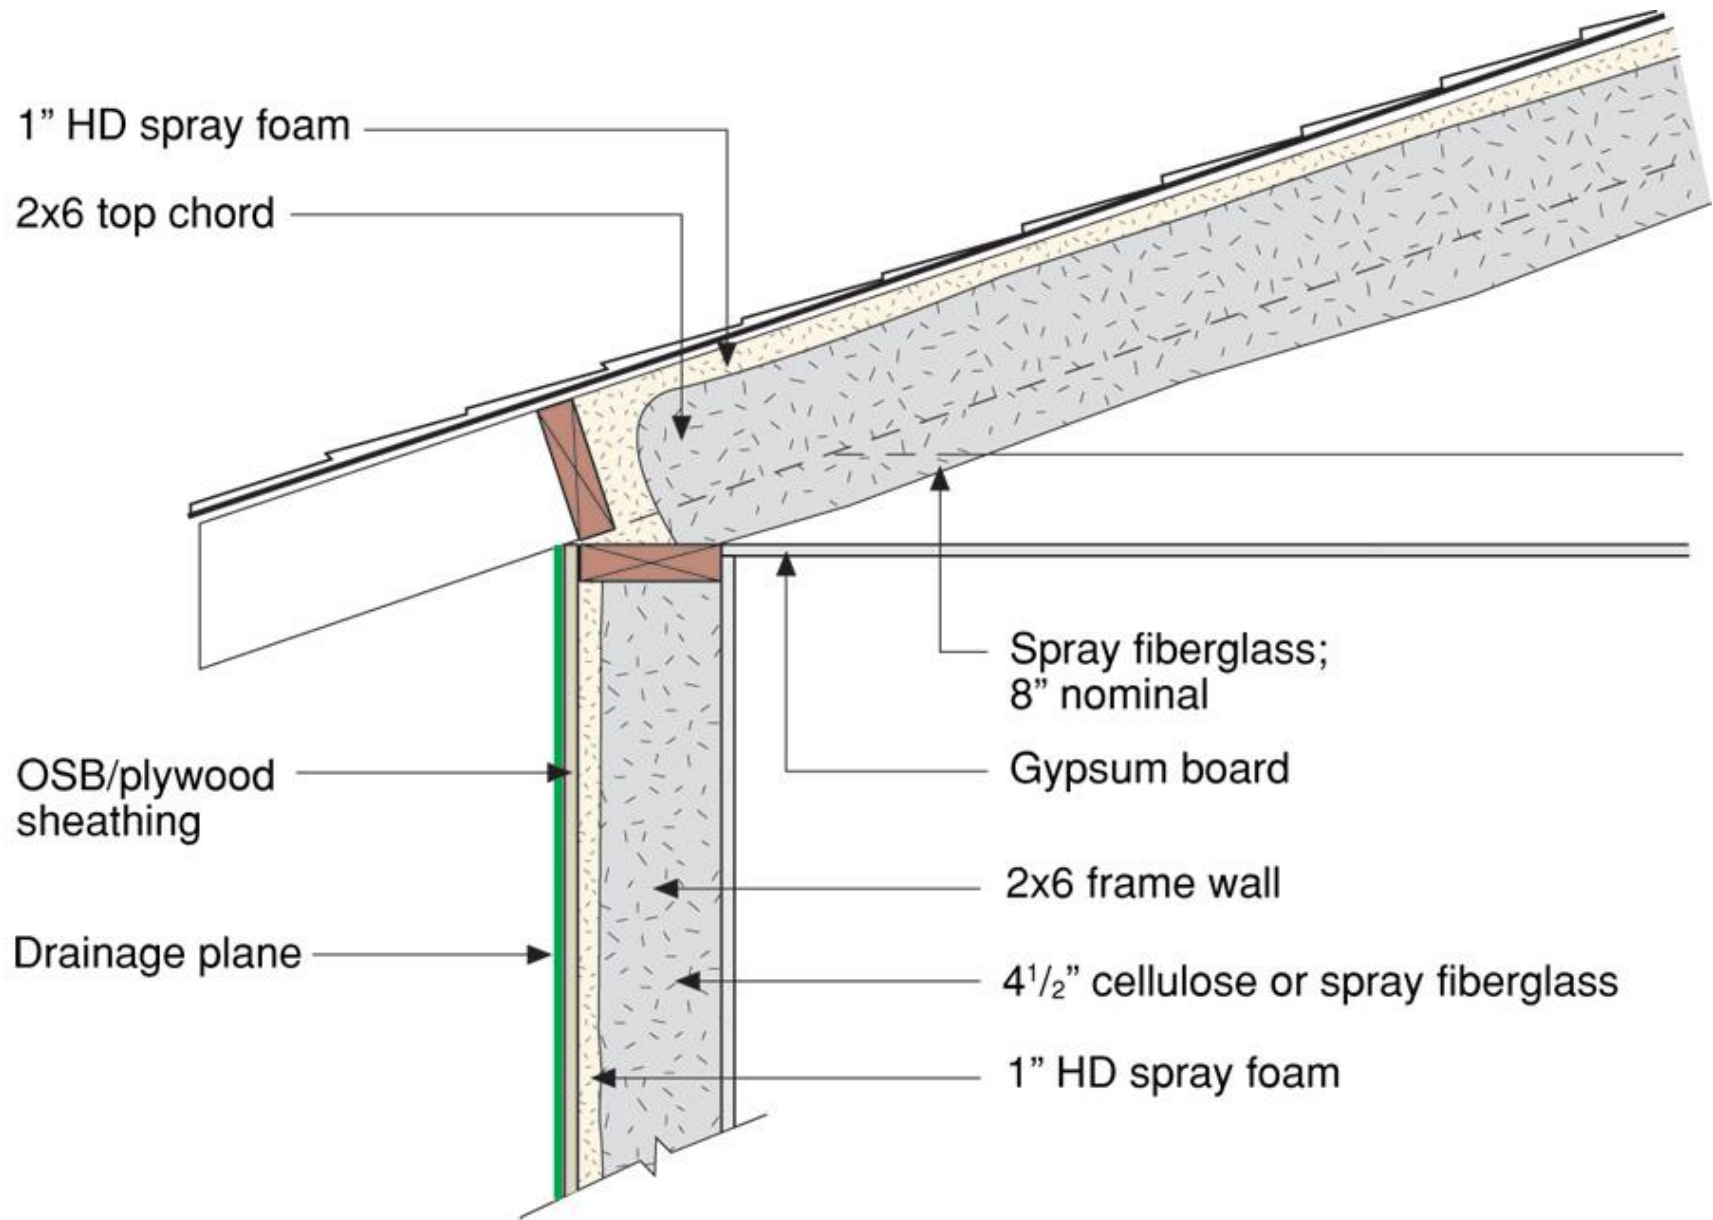

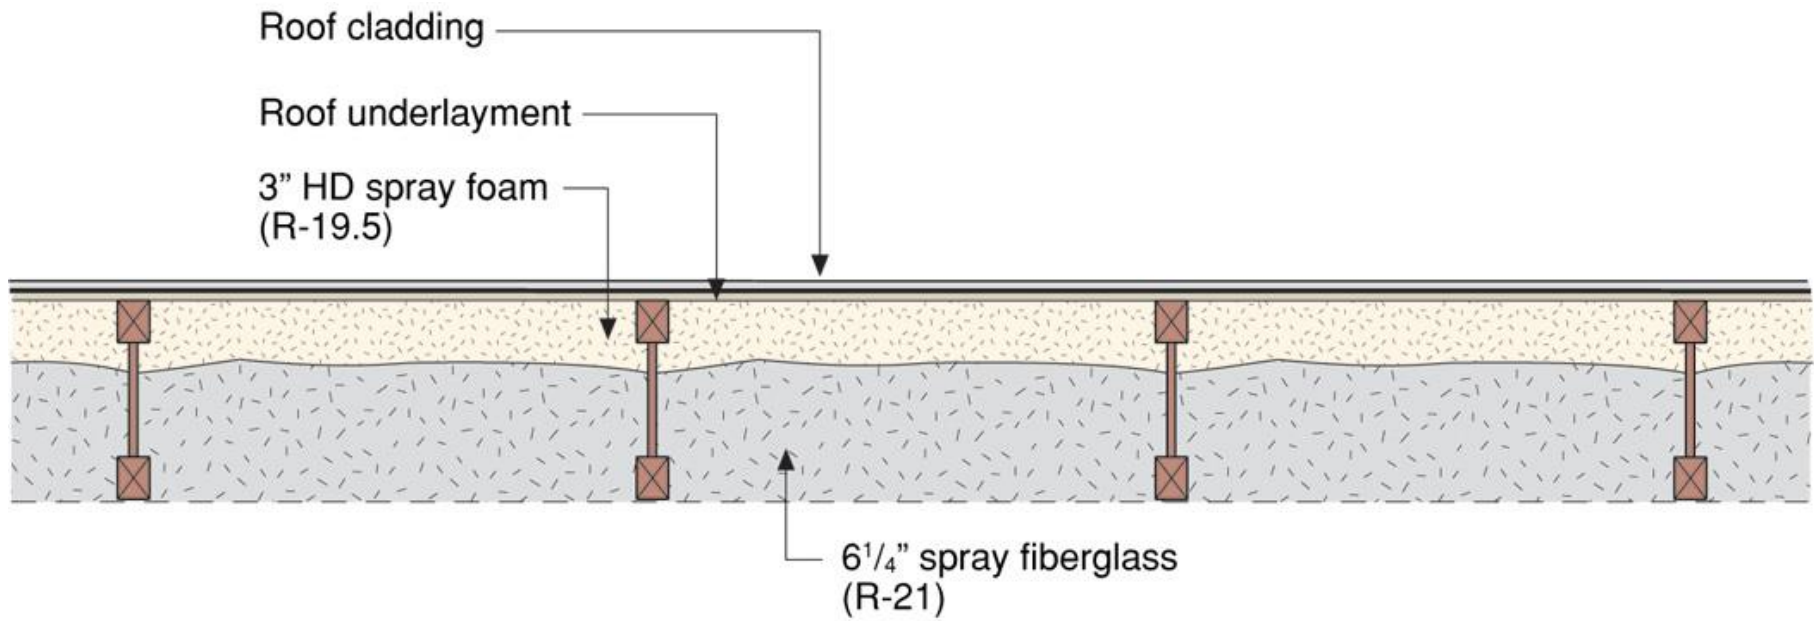

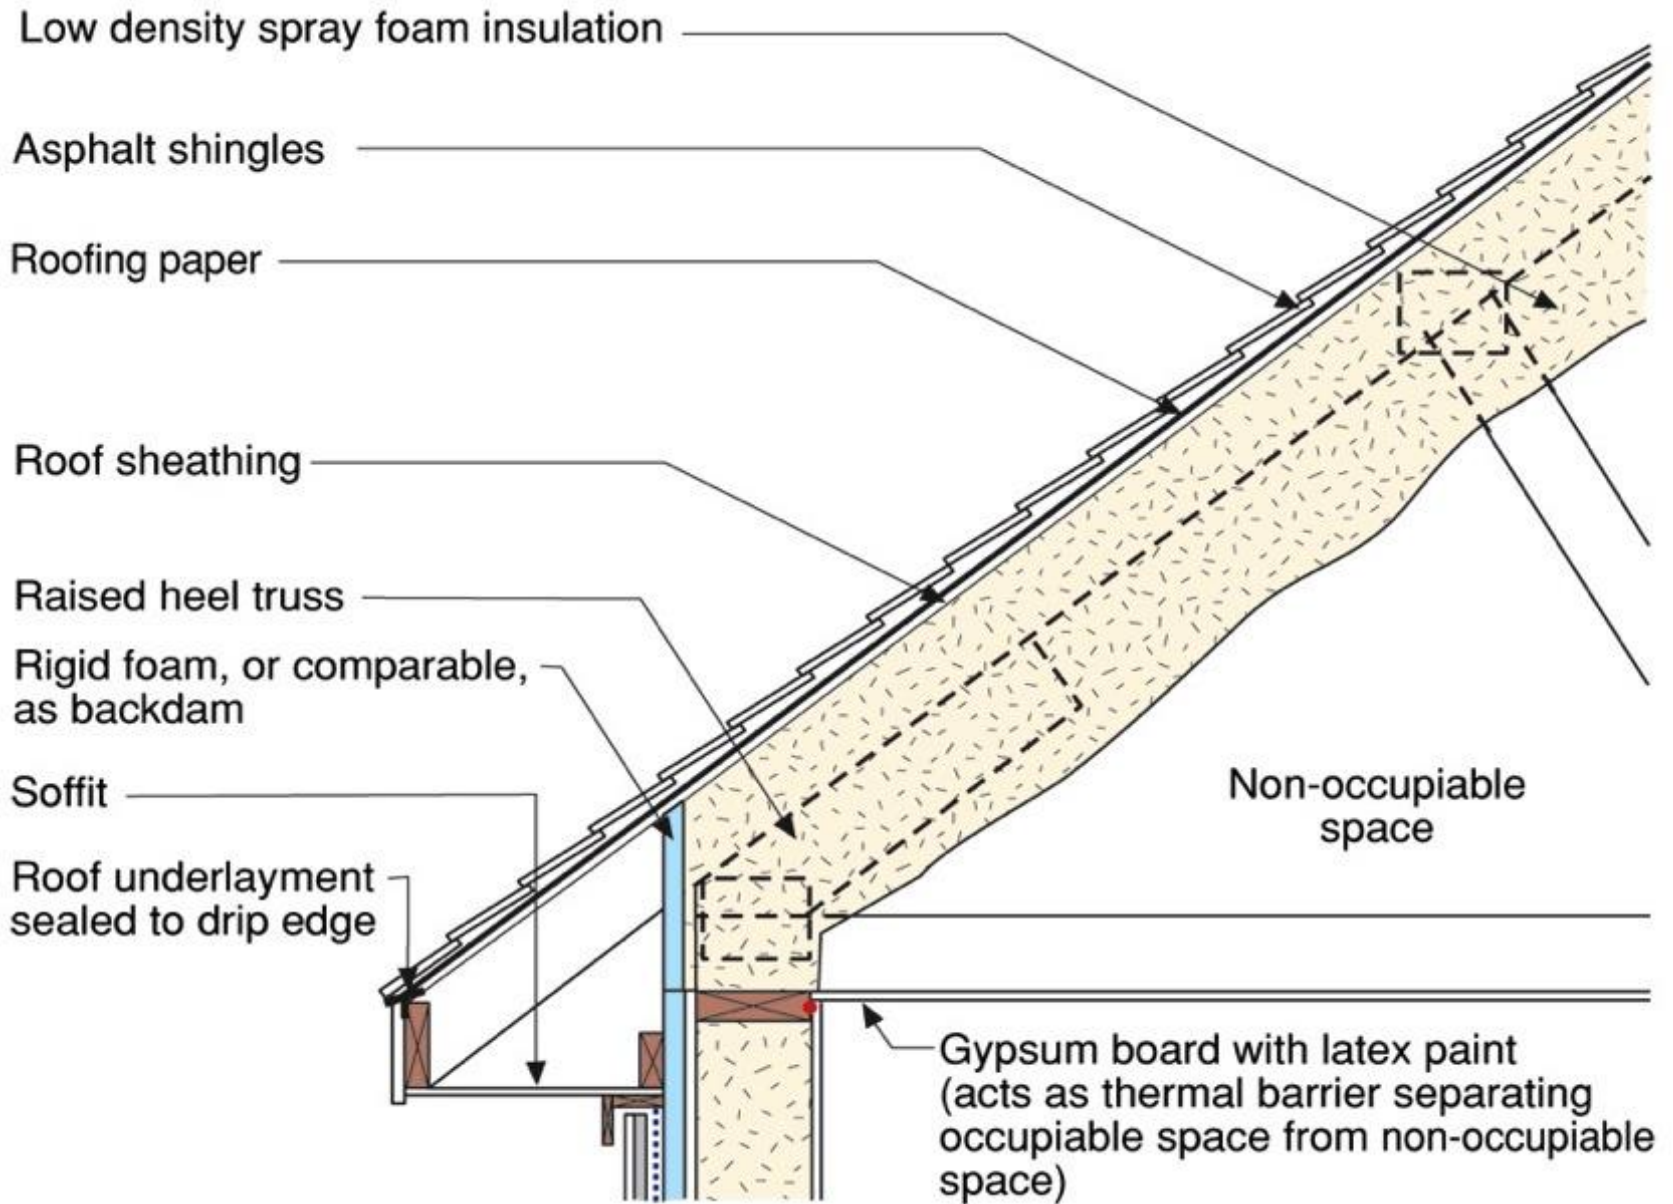



















Map of DOE's Proposed Climate Zones

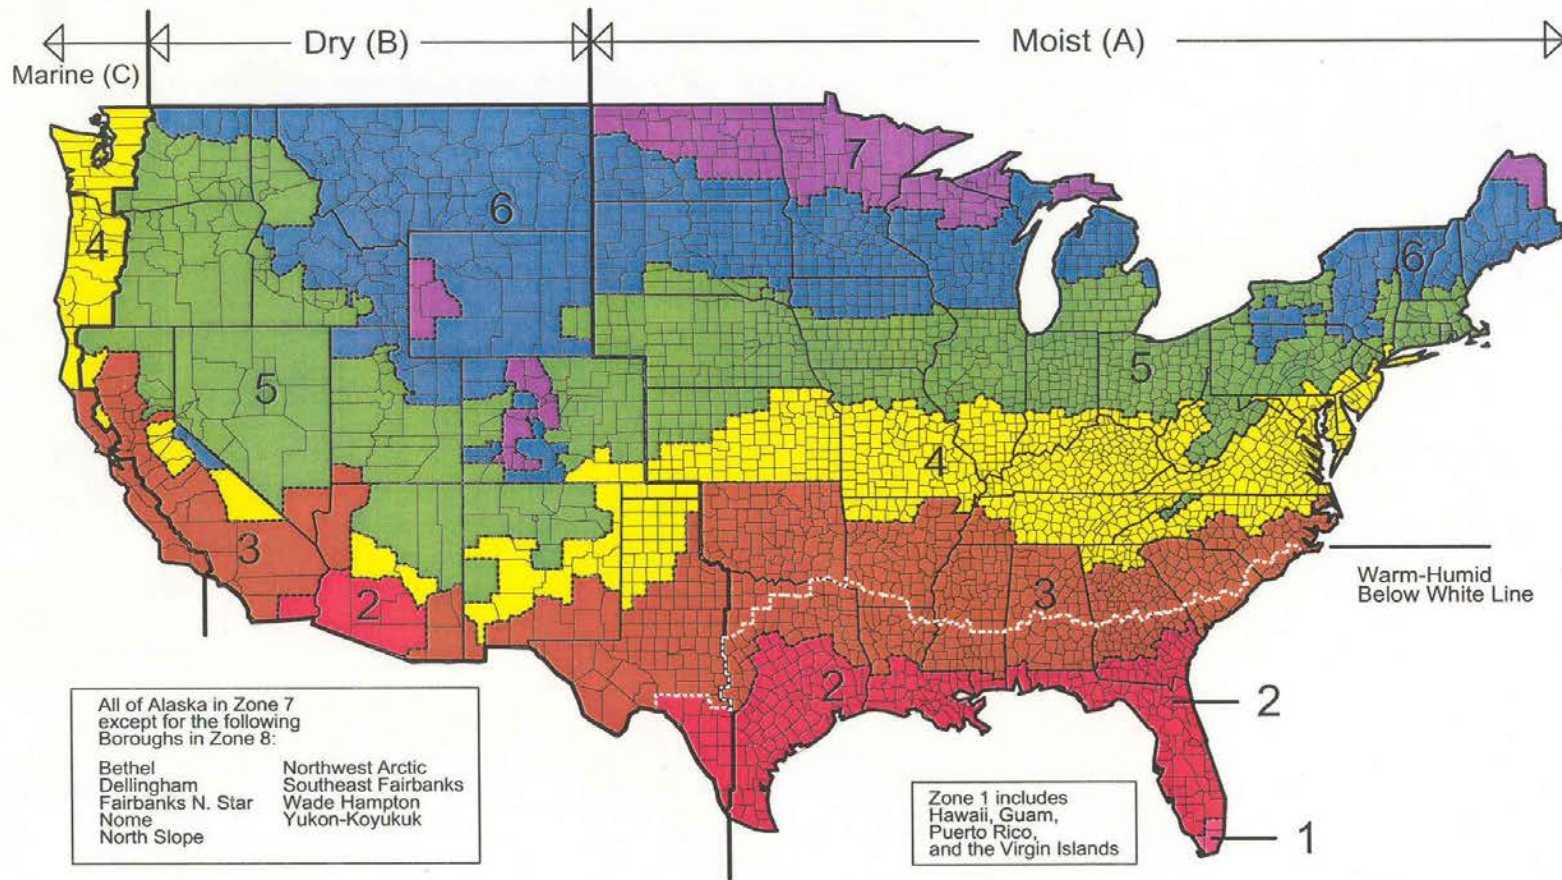

March 24, 2003

Conditioned Attics Not Unvented Attics

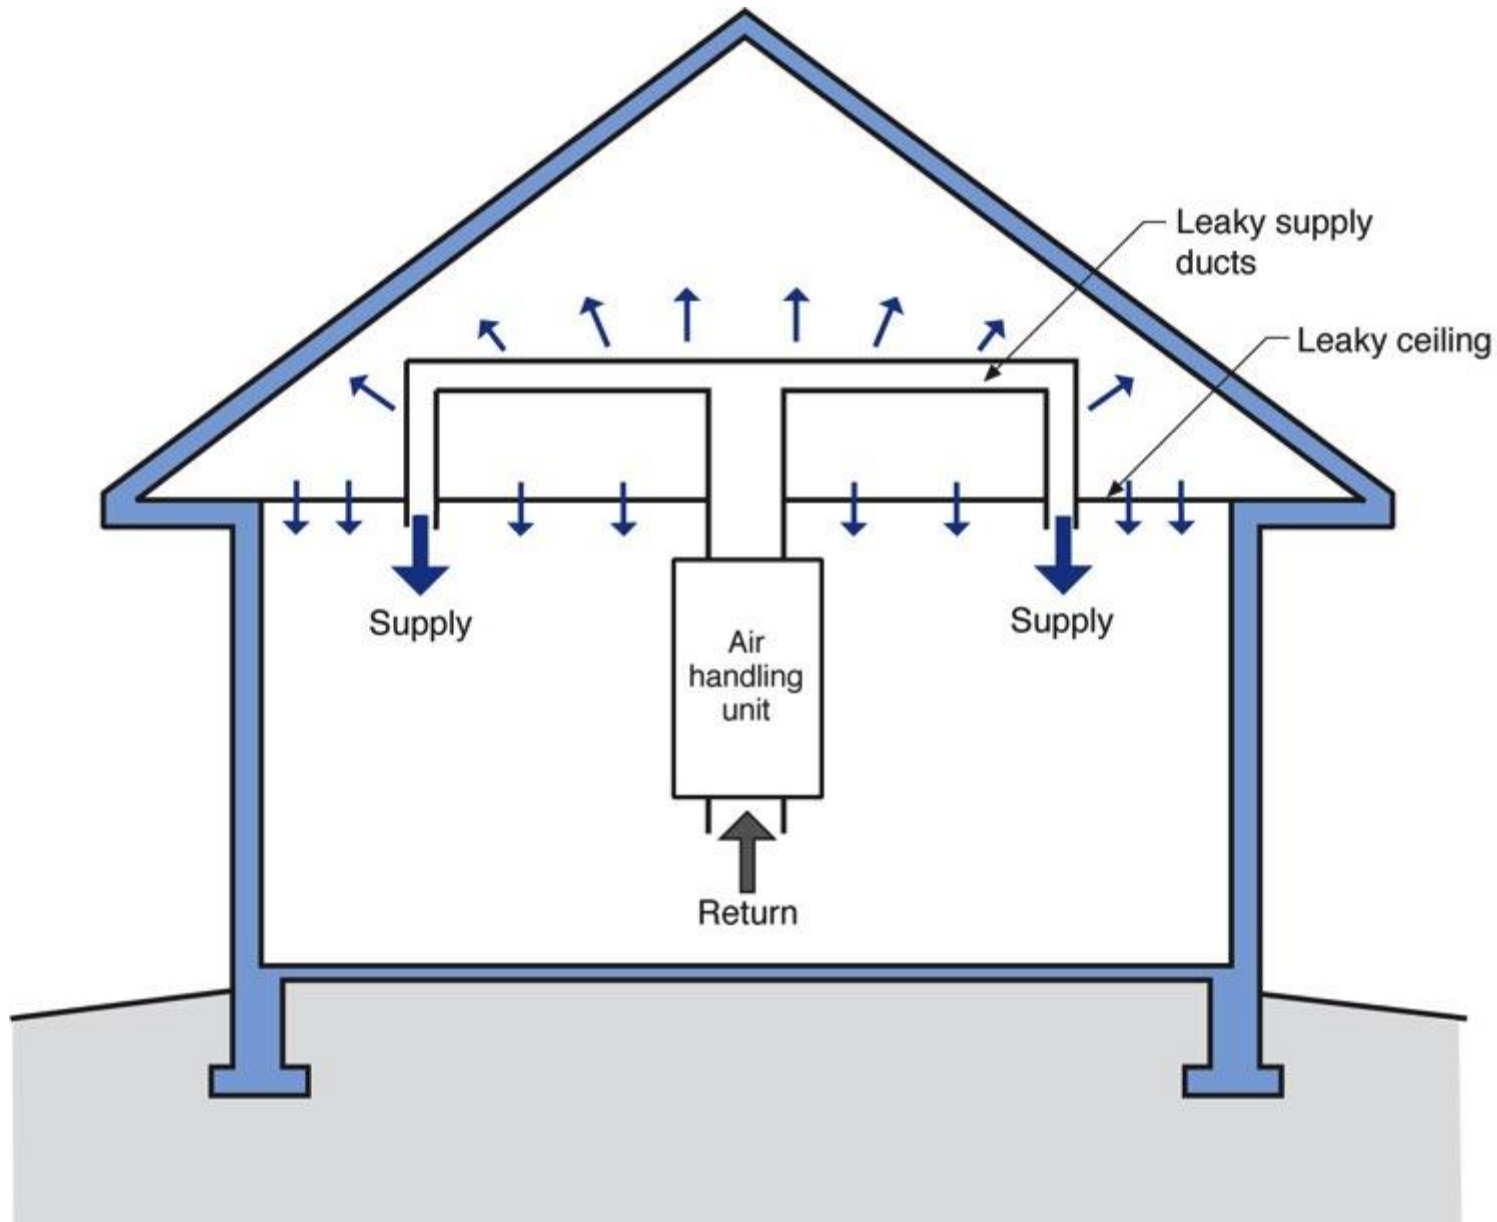



Conditioned Attics Not Unvented Attics Need Supply Air


Conditioned Attics Not Unvented Attics
Need Supply Air
50 cfm/1000 ft² of Attic

Hygric Buoyancy


Components in Dry Air	Volume Ratio compared to Dry Air	Molecular Mass - M (kg/kmol)	Molecular Mass in Air
Oxygen	0.2095	32.00	6.704
Nitrogen	0.7809	28.02	21.88
Carbon Dioxide	0.0003	44.01	0.013
Hydrogen	0.0000005	2.02	0
Argon	0.00933	39.94	0.373
Neon	0.000018	20.18	0
Helium	0.000005	4.00	0
Krypton	0.000001	83.8	0
Xenon	$0.09 \cdot 10^{-6}$	131.29	0
Total Molecular Mass of Air			28.97


Components in Dry Air	Volume Ratio compared to Dry Air	Molecular Mass - M (kg/kmol)	Molecular Mass in Air
Oxygen	0.2095	32.00	6.704
Nitrogen	0.7809	28.02	21.88
Carbon Dioxide	0.0003	44.01	0.013
Hydrogen	0.0000005	2.02	0
Argon	0.00933	39.94	0.373
Neon	0.000018	20.18	0
Helium	0.000005	4.00	0
Krypton	0.000001	83.8	0
Xenon	$0.09 \cdot 10^{-6}$	131.29	0
Total Molecular Mass of Air			28.97

Note Water Vapor (H₂O) is 18
 Dry Air is 29

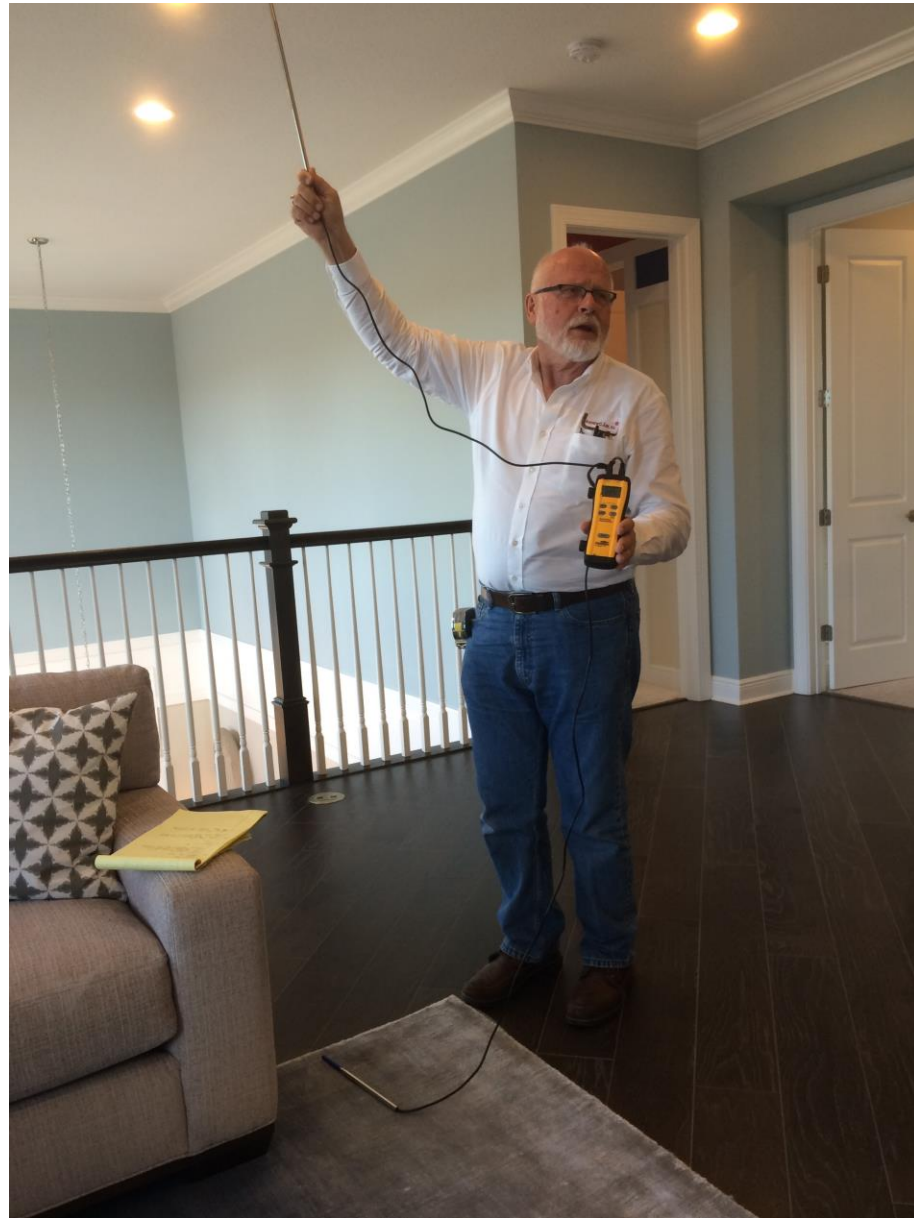



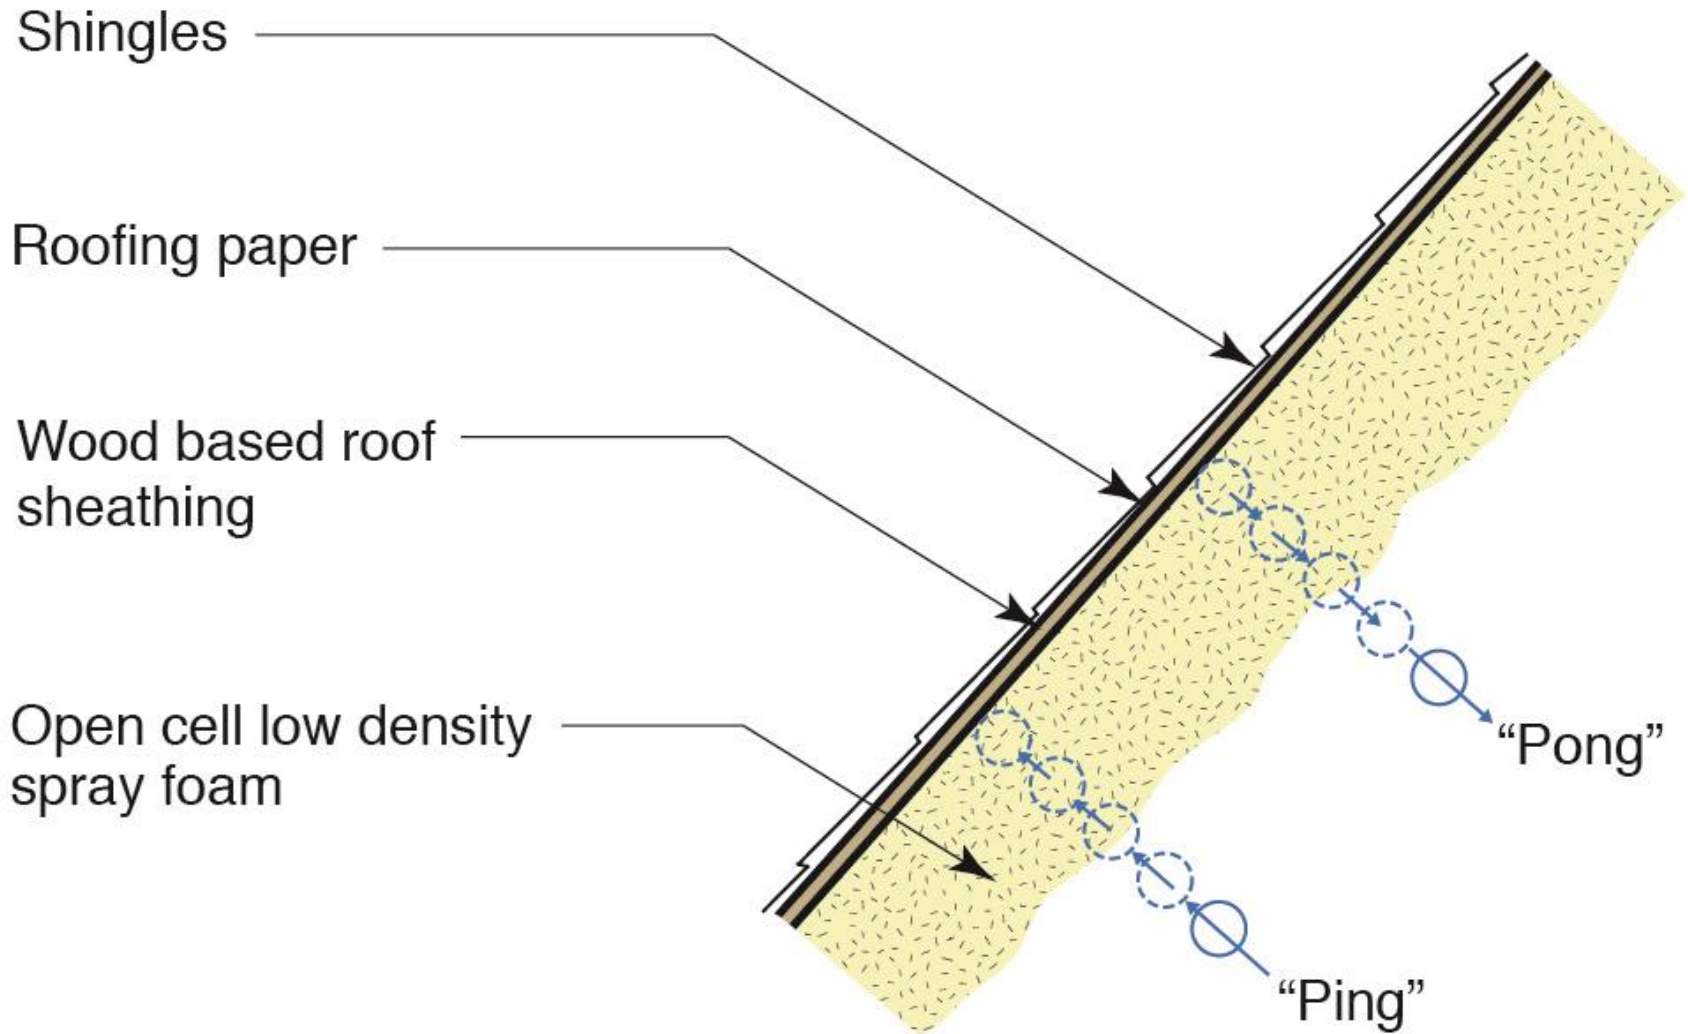

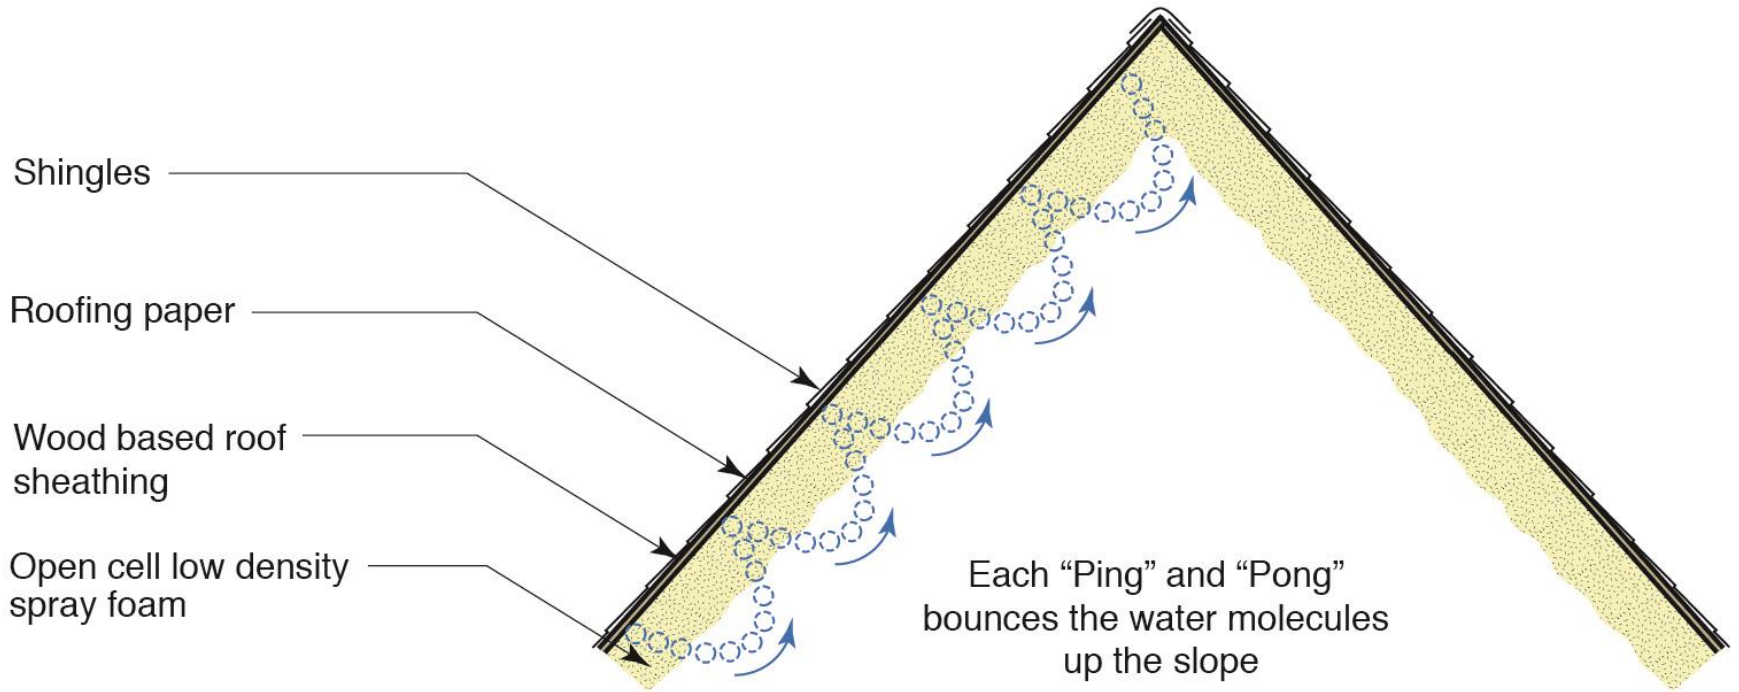

Shingles


Roofing paper

Wood based roof sheathing


Open cell low density spray foam

Each "Ping" and "Pong" bounces the water molecules up the slope



FRF Data: June 1 - September 30, 1989

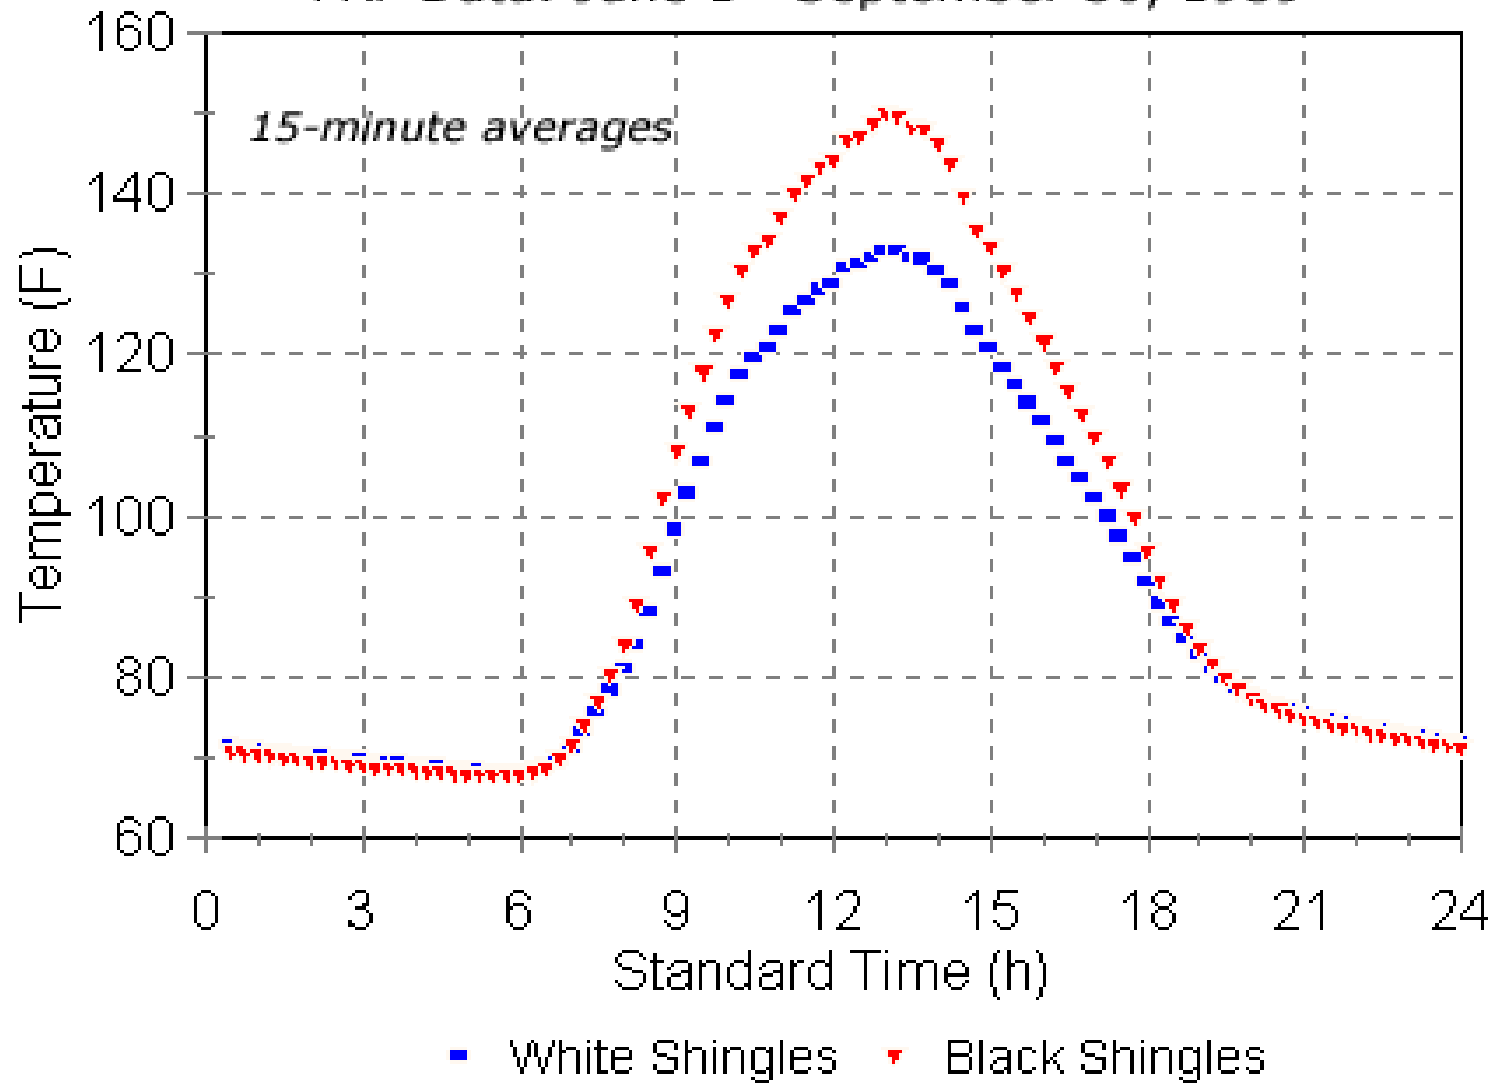

Vented vs. unvented shingle temperatures


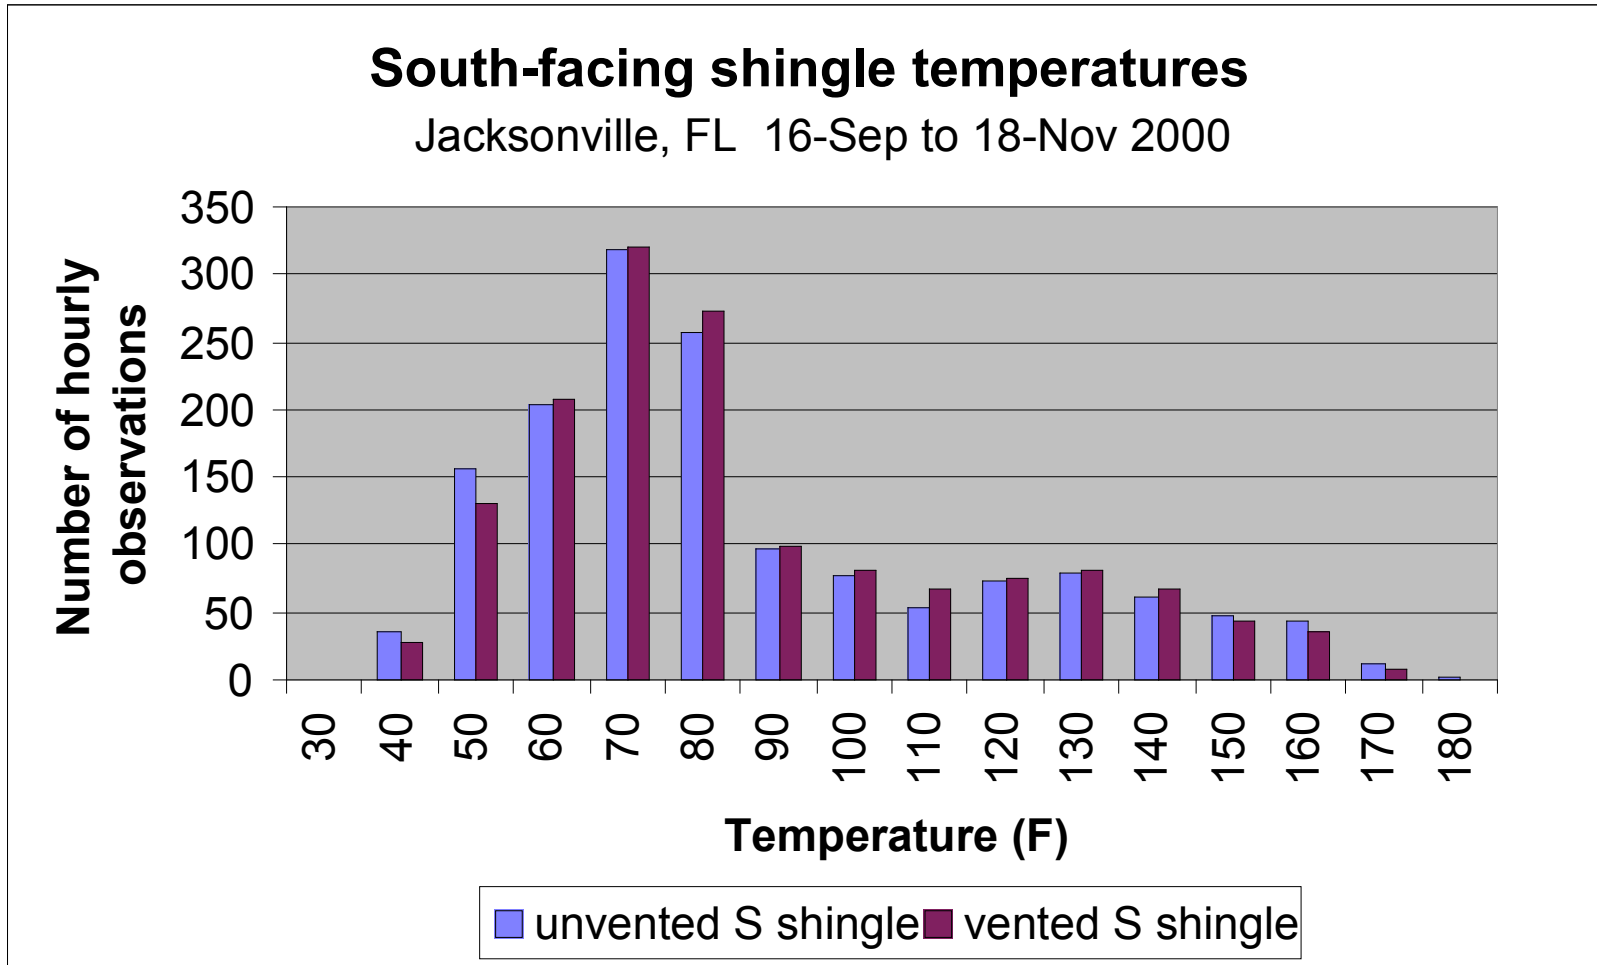



Average Temperatures Vented and Unvented Attics, Aug-97

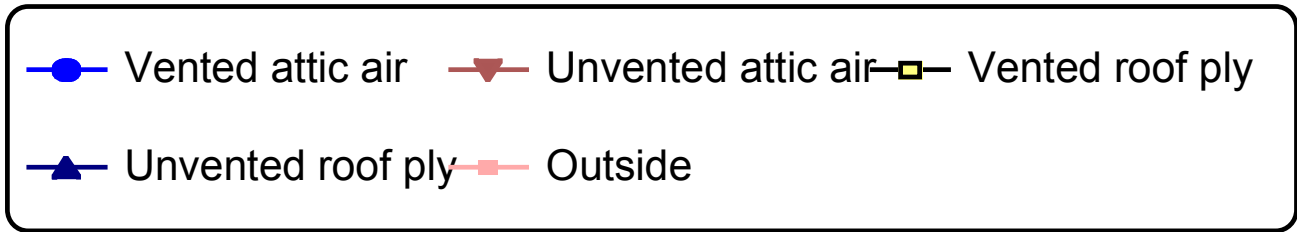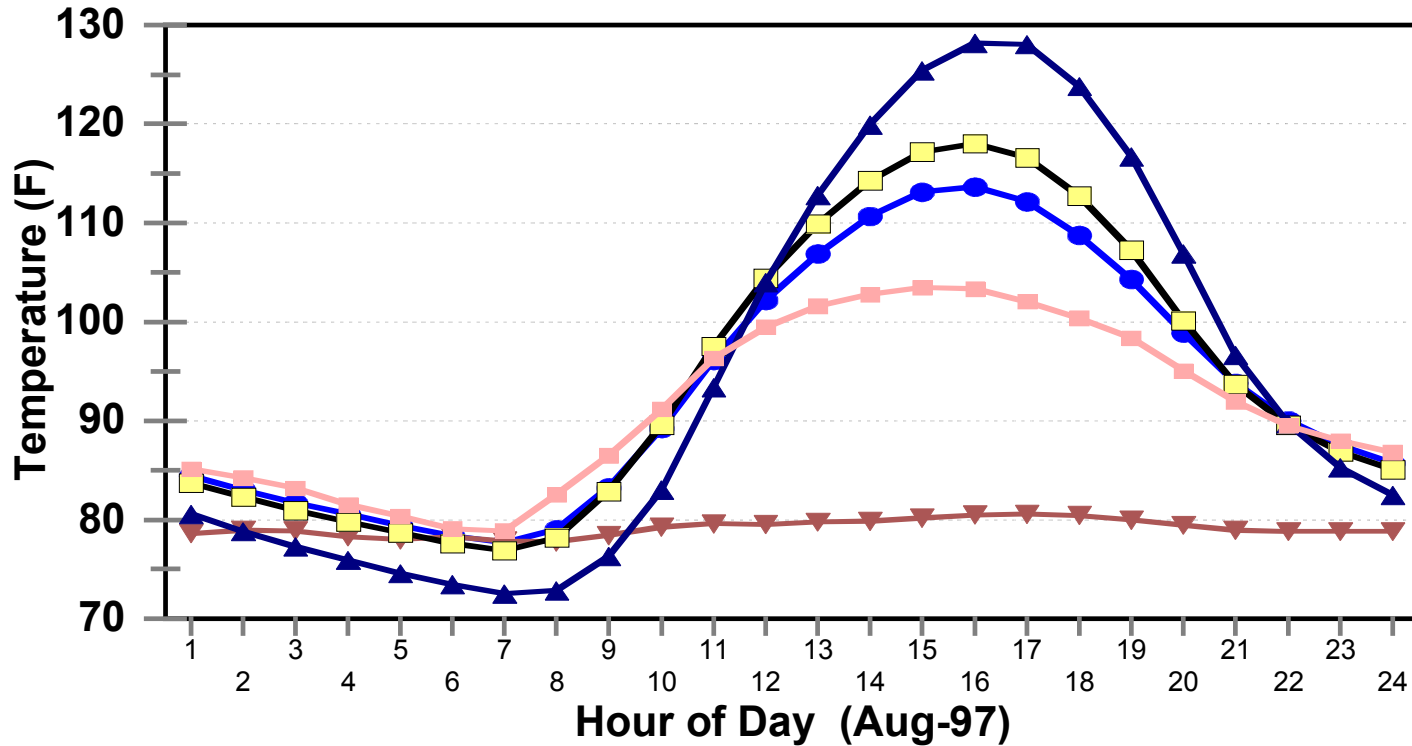

Hourly Maximim Roof Deck Temperature


LV24 and LV22

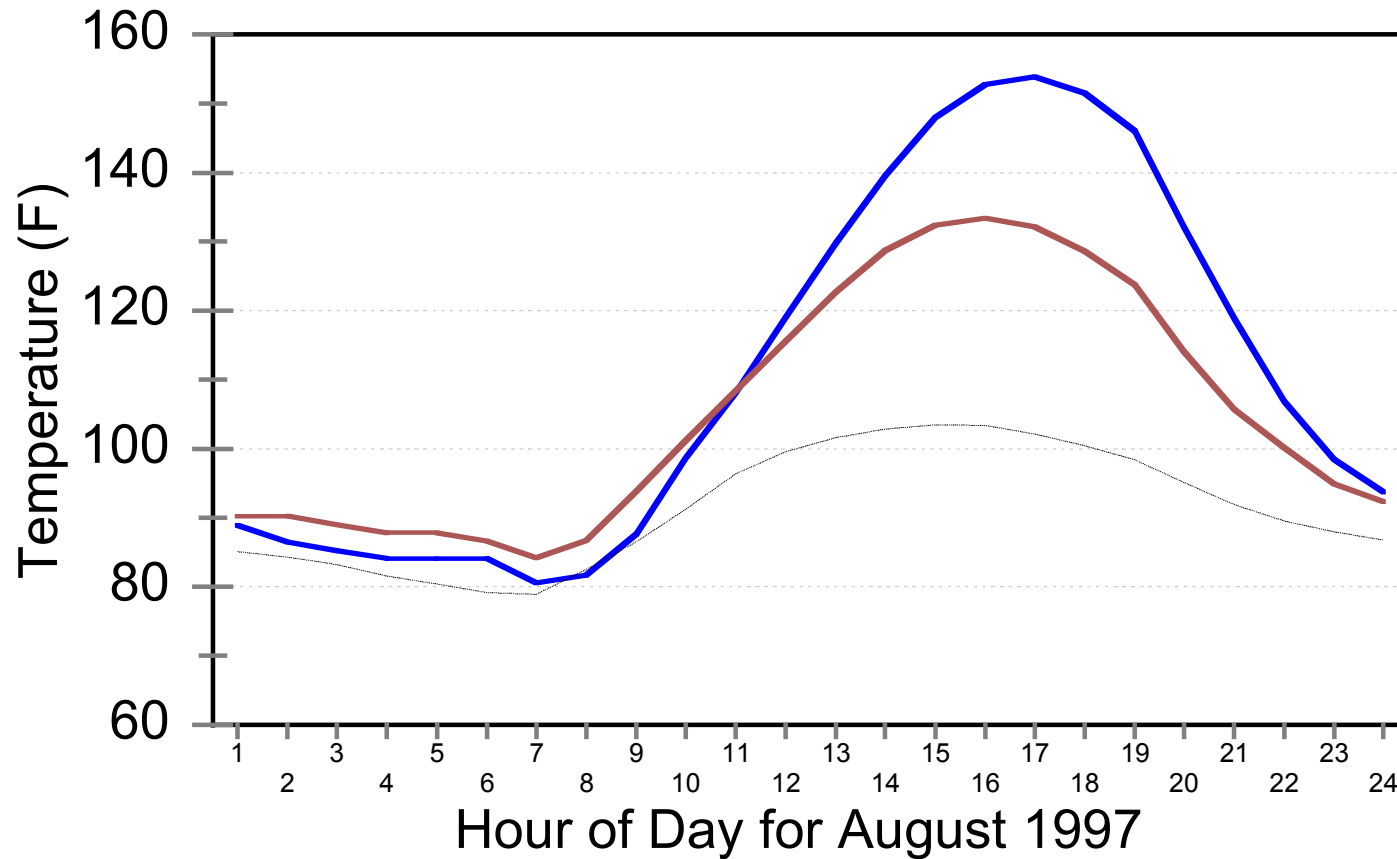

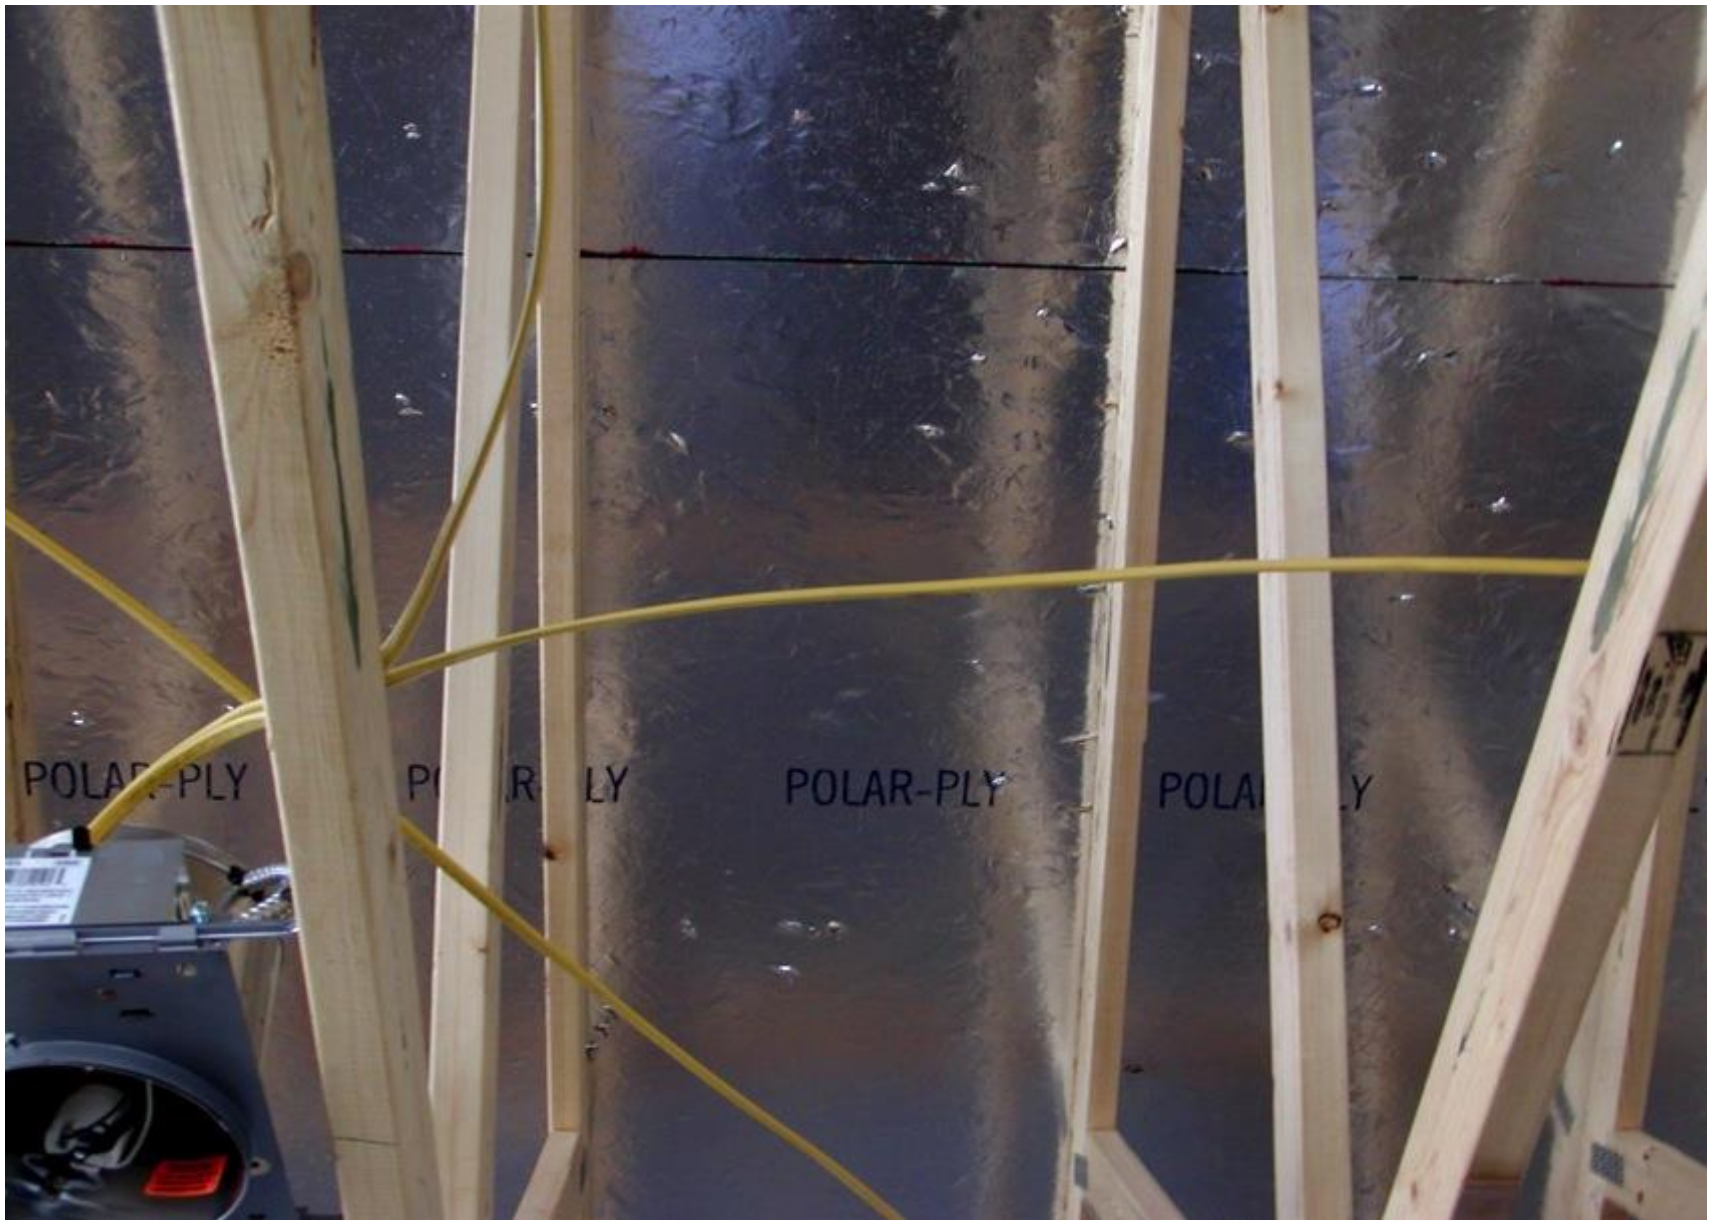

Roof Shingle Temperature

FSEC 3.0: Orlando, 1-Aug

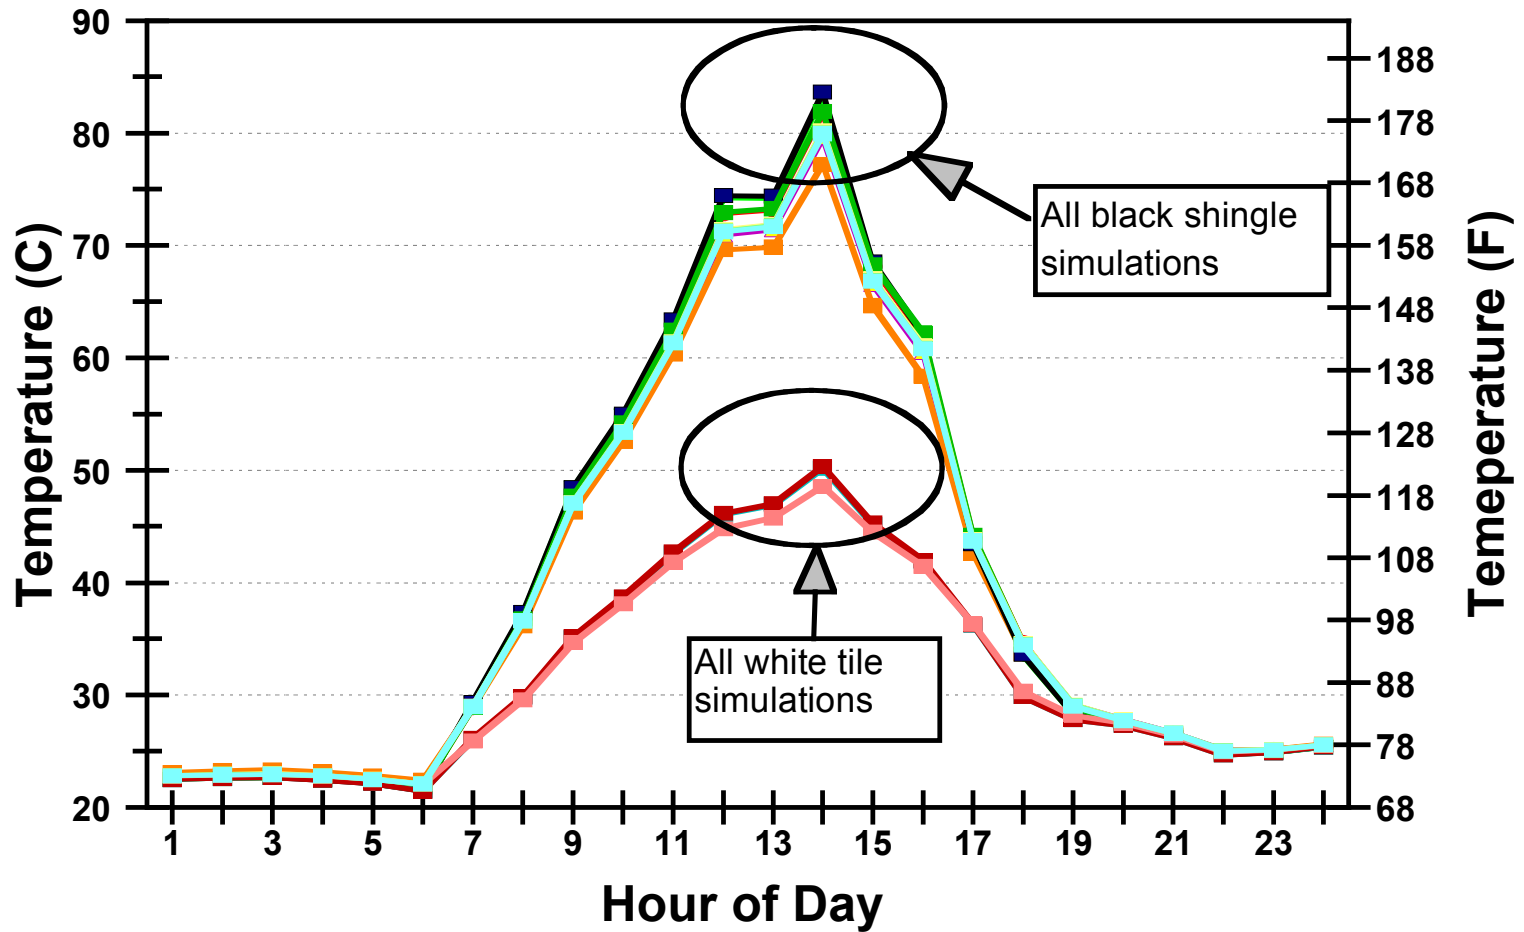

Bottom of Roof Plywood Temperature

FSEC 3.0: Orlando, 1-Aug

